

698-960 MHz/1710-2700 MHz 2- Port MIMO Pole Mount Low-PIM Directional Panel Antenna

MUTI-BAND LOW-PIM DIRECTIONAL PANEL ANTENNA

The Patent Pending PAS69278P antenna is a wide-band dual-port panel antenna with slant 45 polarization that covers the domestic LTE700/Cellular/PCS/AWS/MDS and global GSM900/GSM1800/UMTS/LTE2600 bands. The antenna is ideal for both indoor and outdoor applications. It includes a UV-stable radome enclosure that provides years of use without degradation to either the mechanical properties or aesthetics.



Patent Pending PAS69278P



Close-up of connector & bracket system



Optional mounting kit
Part Number: HKIT-PAX-001

FEATURES

- Applicable for 3G/4G, domestic LTE 700 band, Global LTE 2600 band, WiMax 2300/2500 band, domestic cellular and global GSM solutions
- Weatherproof UV stable radome
- Low Passive Intermodulation
- Conformance to RoHS

APPLICATIONS

- In-building Wireless Networks
- 802.11b/g/n
- iDAS/oDAS
- Wireless Terminal, Point-of-Sale, Machine-to-Machine
- Automatic meter reading and home security

SPECIFICATIONS

PARAMETERS								
Frequency Bands, MHz	700	850	900	1800	1900	2100	2300	2600
Peak Gain, dBi (Typ)	8.7	9.0	9.8	7.5	8.5	8.4	9.5	9.7
Peak Gain, dBi (Max)	9.1	9.7	10.4	8.5	9.1	9.1	10.1	10.0
PAS69278P-91NF Additional Loss, dB	0.5	0.6	0.6	0.9	0.9	1.0	1.1	1.1
VSWR (Typ)	<2.0:1	<1.9:1	<1.7:1	<1.6:1	<1.5:1	<1.5:1	<1.6:1	<1.8:1
Isolation, dB (Typ)	<-38	<-40	<-40	<-30	<-30	<-30	<-30	<-30
3 dB Beamwidth, Vertical Plane	66° to 70°	61° to 65°	56° to 60°	57° to 84°	46° to 62°	46° to 72°	57° to 66°	48° to 55°
3 dB Beamwidth, Horizontal Plane	65° to 74°	59° to 65°	57° to 60°	56° to 85°	52° to 64°	52° to 82°	58° to 63°	48° to 54°
PIM, 3rd Order, 2 x 20W (Typ)	< -151 dBc			< -153 dBc				
CPR at Boresight (Typ)	25 dB			23 dB				
CPR at Boresight (Min)	25 dB			17 dB				
F/B Ration, Co-pol	21 dB							
Isolation, (Min)	-28 dB							
PIM, 3rd Order, 2 x 20W (Max)	< -150 dBc							
Maximum VSWR	2.0:1							
Nominal Impedance	50 Ω							
Max Input Power per port	50 Watts							
Polarization	Slant ± 45°							
RF Connector	Dual Type N female							
Radome & Base color	White, color code (SABIC) WH9B034							
Flammability Rating (Radome)	UL 94V0 Materials							
Dimensions (width x length x height)	295 x 295 x 82 mm (11.6" x 11.6" x 3.2")							
Weight	1.46 kg (3.2 lbs)							
Storage Temperature	-40°C to 85°C (-40° F to 185° F)							
Operational Temperature	-30°C to 70°C (-22°F to 158°F)							
Environmental Conditions	ETSI EN300 019-2-4, class 4.1E.							
Wind Rating	150 km/hr (93 mph)							
Ingress Protection	PAS69278P-FNF model only for outdoor IP55							
Material Substance Compliance	RoHS Compliant							

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941 IAS-
EUSales@lairdtech.com

Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com


PAS69278P

698-960 MHz/1710-2700 MHz 2- Port MIMO Pole Mount Low-PIM Directional Panel Antenna

SPECIFICATIONS

MODEL NUMBER	CABLE LENGTH	CONNECTOR
PAS69278P-FNF	NA (Direct Connect)	Dual Type N Female
PAS69278P-91NF	91 cm, (36"), cable	Dual Type N Female
PAS69278P-30D41F	30 cm, (12"), cable	Dual Type 4.1-9.5 Female
PAS69278P-30D43F	30 cm, (12"), cable	Dual Type 4.3-10 Female

ANTENNA PATTERNS

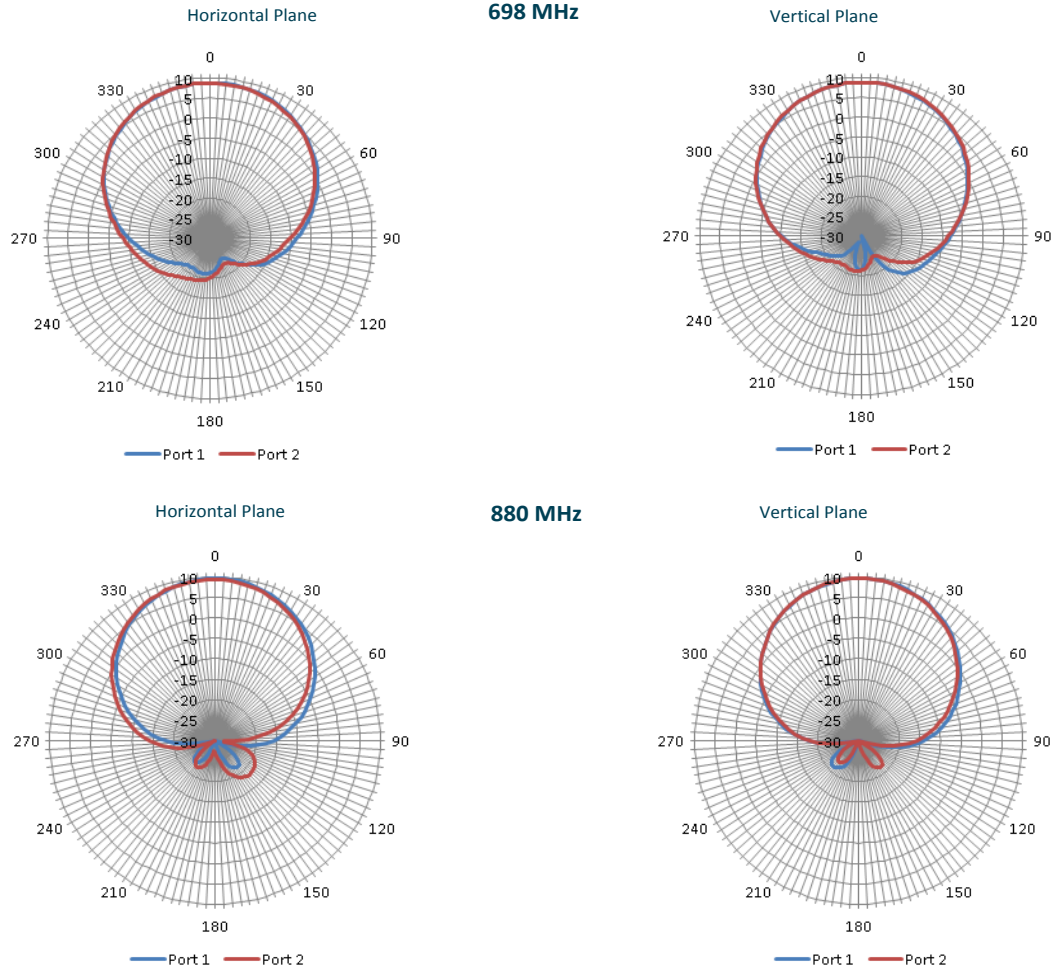




Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941 IAS-
EUSales@lairdtech.com

Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com

**698-960 MHz/1710-2700 MHz 2- Port MIMO
Pole Mount Low-PIM Directional Panel Antenna**

ANTENNA PATTERNS

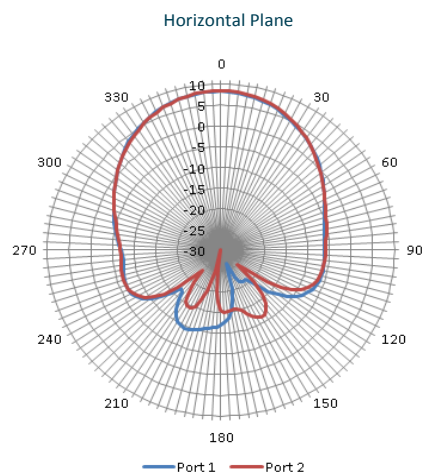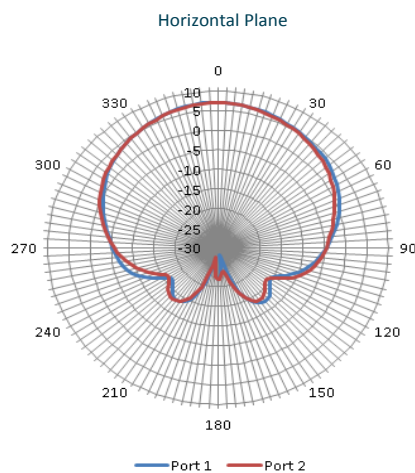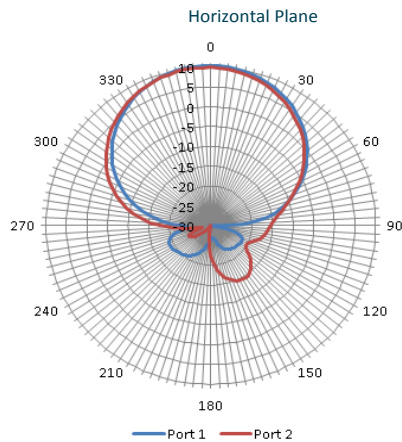

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941 IAS-
EUSales@lairdtech.com


Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

PAS69278P

698-960 MHz/1710-2700 MHz 2- Port MIMO Pole Mount Low-PIM Directional Panel Antenna

ANTENNA PATTERNS

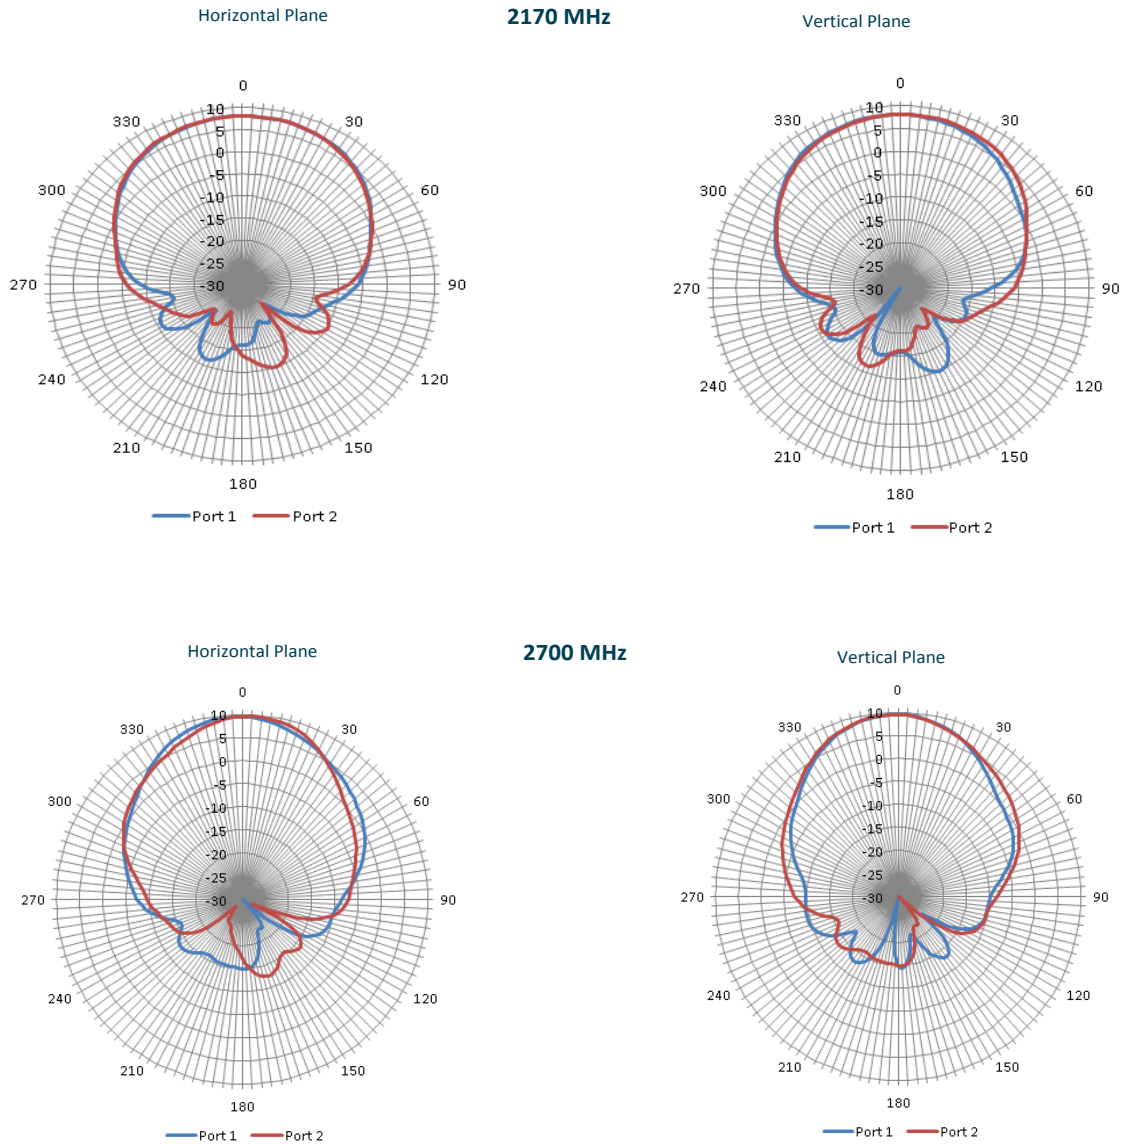

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +44.1628.858941 IAS-
EUSales@lairdtech.com

Asia: +86.21.5855.0827.127
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

ANT-DS-PAS69278P 013015

Any information furnished by Laird Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird materials rests with the end user, since Laird and its agents cannot be aware of all potential uses. Laird makes no warranties as to the fitness, merchantability or suitability of any Laird materials or products for any specific or general uses. Laird shall not be liable for incidental or consequential damages of any kind. All Laird products are sold pursuant to the Laird Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Logo, and other marks are trademarks or registered trademarks of Laird Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird or any third party intellectual property rights.