

SR249120D Series

2.4-2.5 / 4.9-5.9 GHz 5 dBi

Dual-Band 120° Sector Antenna



DUAL BAND TRI-MODE SECTOR ANTENNA

Laird Technologies' SR249120D dual-band tri-mode antenna offers the system integrator a perfect solution to indoor and outdoor wide area coverage wall-mount applications. While omni-directional antennas are well suited for installations where the antenna has a 360 degree unobstructed view of the coverage area, wall mounting omni-directional antennas can create a number of system performance issues. Because the antenna radiates equally in all directions, much of the power is radiated directly to the wall surface behind the antenna. This causes elements of the wall to become actual components of the antenna, often causing multi-path nulls within the intended coverage area.

The SR249120D antenna provides a solution for the most common coverage requirements. Its integrated backplane shields the radiating element from the wall, eliminating any problems from wall construction components. The antenna's gain makes it a perfect replacement for typical high-performance omni-directional antennas. The result is solid, consistent, and uniform coverage within the intended coverage area.

FEATURES

- Covers 802.11b/a/g modes of operation
- Pattern optimized for wide area directional coverage
- Suitable for both indoor and outdoor applications direct to radio mounting
- Wide range of connector type and cable length options available

MARKETS

- Healthcare centers
- Campus
- Warehouses
- Business parks
- Transport concourses
- Retail malls

global solutions: local support.™

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com





www.lairdtech.com

SR249120D Series

2.4-2.5 / 4.9-5.9 GHz 5 dBi

Dual-Band 120° Sector Antenna

PARAMETER	SPECIFICATIONS
Part Number	SR249120D
Frequency (GHz)	2.4-2.5 GHz; 4.9-5.9
Gain (dBi)	5
3 dB Beamwidth-Azimuth	120°
3 dB Beamwidth-Elevation	65°
Polarization	Vertical Linear
VSWR	2.0:1
Cable Length (mm)	304 Ultralink RG-58
RF Connector	N (m)
Power Rating	5 W
Dimensions (mm)	1.38" x 2.16" x 5.16" (35 x 55 x 131)
Weight	.09 kg
Enclosure	High Strength PC
Mount Style	Wall / Mast
RoHS	Compliant

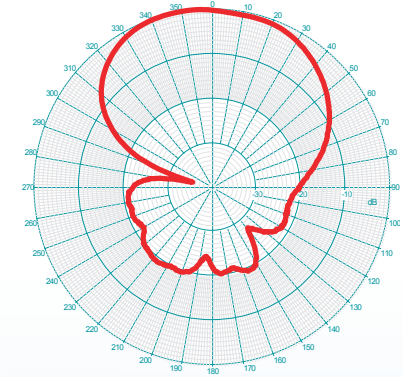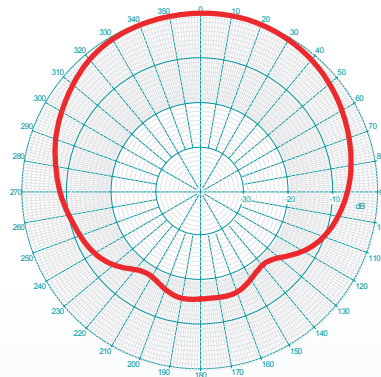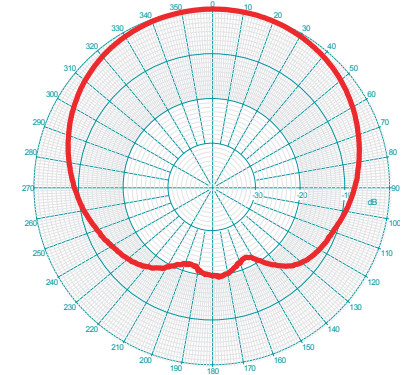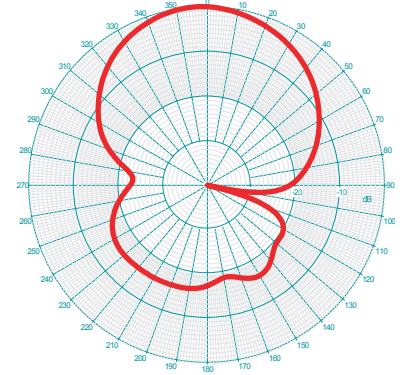

global solutions: local support™

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com

Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

ANT-DS-SR249120D 0509

Any information furnished by Laird Technologies and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability, or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request. All Laird Technologies products are sold pursuant to the Laird Technologies terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request.

© 2009 All Rights Reserved. Laird Technologies is a registered trademark of Laird Technologies, Inc.