

# CnC Tech . LLC



STYLE 品名	PVC INSULATED 105 ° C 150V HOOK UP WIRE	DATE 日期	2011-8-16
SIZE 规格	UL2678 30AWG 7/0.1TS CONDUCTOR	REV 版本	A0
ITEM 类型	HP-XXP-30#-7/0.1TS-0.635		

STANDARD 标准: UL758 UL1581 C22.2  
 APPLICATION 用途: INTERNAL WIRING OF APPLIANCES AND ELECTRONIC EQUIPMENT  
 CONSTRUCTION 加工:

CONDUCTOR 导体	SIZE 规格	30AWG		
	CONSTRUCTION 结构	7/0.1 ± 0.005mmTS		
	MATERIAL 材质	TINNED COPPER CONDUCTOR		
	CONDUCTOR DIAMETER 导体直径	0.3mm		
INSULATION 绝缘	MINIMUM THICKNESS 最小厚度	0.15mm		
	AVERAGE THICKNESS 平均厚度	0.18mm		
	COLOR 颜色	RIBBON FLAT CABLE		
JACKET 外被	DIAMETER 外径	0.66 ± 0.08mm		
	MATERIAL 材质	105 ° C PVC		
	PITCH 间距	0.635 ± 0.08mm		
	MARKING 印字	兄AWM 2678 30AWG 105 ° C 150V VW-1 E332441 C兄 AWM I A 105 ° C 150V FT1		
ELECTRIC 电气 FUNCTION 功能	RATE VOLTAGE 额定电压	150V		
	VOLTAGE-WITHSTAND 耐电压	1500 V		
	COND. RESISTANCE 导体电阻	MAX: 337Ω /KM 20 ° C		
	INSU. RESISTANCE 绝缘电阻	MIN: 100MΩ /KM 20 ° C		
	TENSILE STRENGTH 抗张强度	老化前	1500PSI	老化后
	ELONGATION 伸长率		100%	1290 PSI (85%) 75% (65%)

FLAT /WIRE CABLE 排线电线:

UNIT 单位: mm

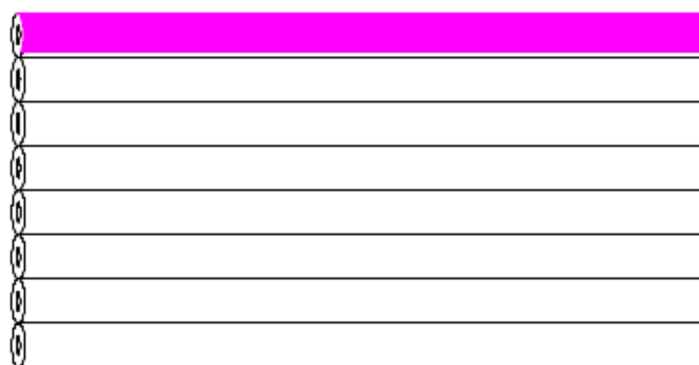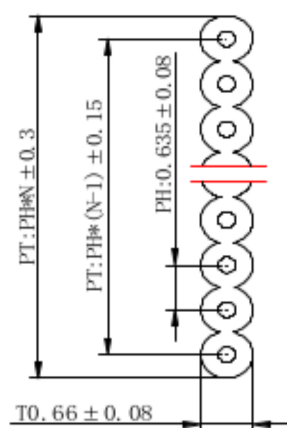

N ≤ 30 A = ± 0.3  
 N ≥ 31 A = ± 0.4

制作:	王绍富	审核:		核准:	
-----	-----	-----	--	-----	--