


EVEREADY 1222

9V



Industry Standard Dimensions

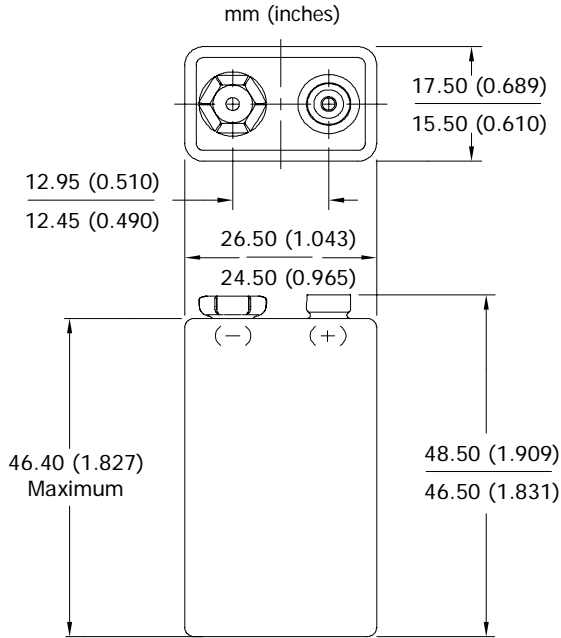


Specifications




Classification: Super Heavy Duty
Chemical System: Leclanché
 Zinc-Manganese Dioxide (Zn/MnO₂)
 No added mercury or cadmium
Designation: ANSI-1604D, IEC-6F22
Nominal Voltage: 9.0 volts
Operating Temp: -5°C to 55°C (20°F to 130°F)
Typical Weight: 37.0 grams (1.3 oz.)
Typical Volume: 20.3 cubic centimeters (1.2 cubic inches)
Jacket: Metal
Terminal: Miniature Snap

Milliamp-Hours Performance

Continuous discharge to 4.8 volts at 21°C

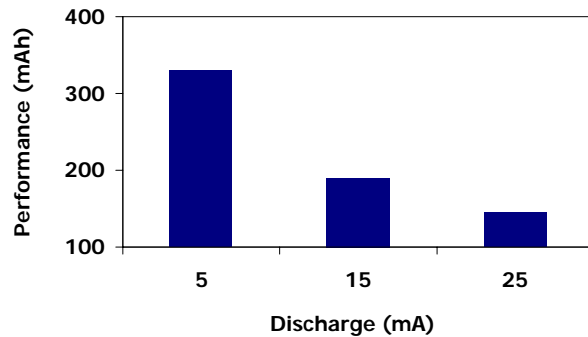

Industry Standard Tests (21°C)

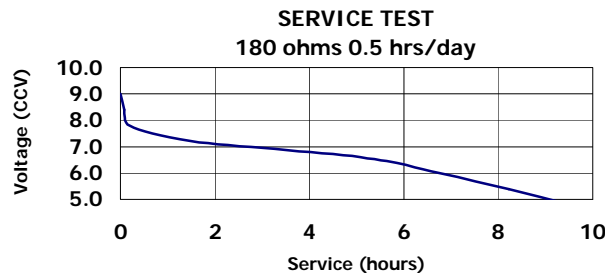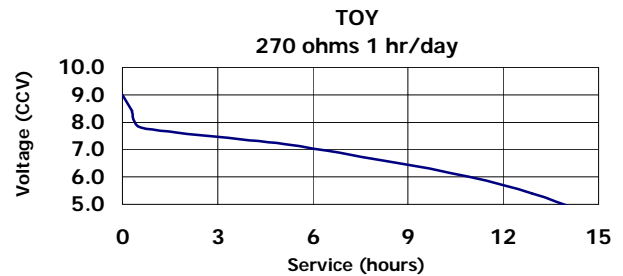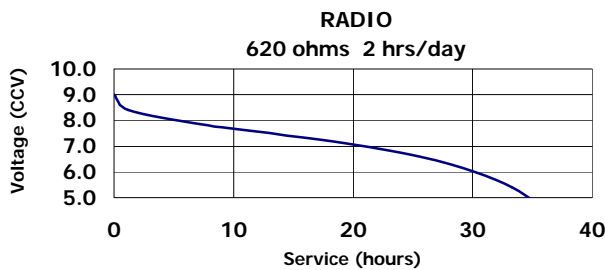

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
 ©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.