

MAX2674/MAX2676

GPS/GNSS LNAs with Antenna Switch and Bias

General Description

The MAX2674/MAX2676 are ultra-small, high-IP3, low-noise amplifiers (LNAs) designed for GPS L1, Galileo, and GLONASS applications. Designed in Maxim's advanced SiGe process, the devices are also equipped with an autosensing feature for applications that enable the use of external antennas. These high-performance LNAs provide high gain and an ultra-low noise figure while optimizing the input-referred 2dB compression point and 3rd-order intercept point.

The ultra-small size is ideal for front-end modules and receiver applications in cellular phones, smartphones, PDAs, PNDs, or other custom GNSS applications. The MAX2674/MAX2676 operate from a 1.6V to 3.6V single supply. The MAX2674 is optimized for high gain, while the MAX2676 is optimized for high linearity. A shutdown feature is present in both devices reducing the supply current to less than 10 μ A. The antenna port automatically senses when an external antenna is connected, eliminating the need for additional control circuitry while also providing improved short-circuit protection. The MAX2674/MAX2676 are available in an ultra-small, RoHS-compliant 0.86mm x 1.26mm x 0.64mm wafer-level package (WLP).

Features

- ◆ **Eliminate Discrete Antenna Sensing, Switching, and Bias Networks**
 - Autodetect Antenna Connection
 - Provide Antenna Bias
 - Short-Circuit Protection
- ◆ **Wide 1.6V to 3.6V Supply Voltage Range**
- ◆ **Ultra-Small Footprint (0.86mm x 1.26mm) WLP Package**
- ◆ **For Applications Without Antenna Port, Use Pin-Compatible 4-Bump MAX2686/MAX2687/MAX2688 LNA**

Applications


Front-End SAW Modules
 Receiver Modules
 Cellular and Smartphones
 Telematics (Asset Tracking and Management)
 Personal Navigation Devices (PNDs)
 Recreational, Marine Navigation

Ordering Information

| PART | TEMP RANGE | PIN-PACKAGE |
|--------------|----------------|-------------|
| MAX2674EWT+T | -40°C to +85°C | 6 WLP |
| MAX2676EWT+T | -40°C to +85°C | 6 WLP |

+ Denotes a lead(Pb)-free/RoHS-compliant package.
 T = Tape and reel.

Typical Operating Circuit

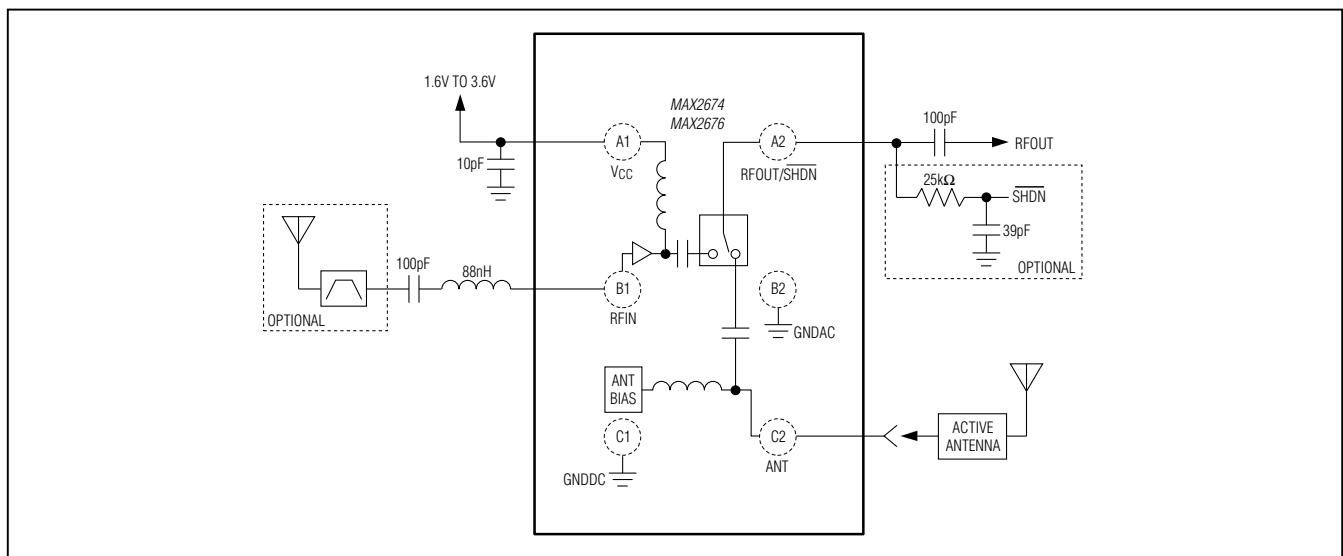

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim's website at www.maximintegrated.com.

MAX2674/MAX2676

GPS/GNSS LNAs with Antenna Switch and Bias

ABSOLUTE MAXIMUM RATINGS

| | | | |
|---|-----------------------------------|---|-----------------|
| V _{CC} to GND ₋ | -0.3V to +3.9V | Operating Temperature Range..... | -40°C to +85°C |
| Other Pins to GND ₋ | -0.3V to (V _{CC} + 0.3V) | Junction Temperature..... | +150°C |
| Maximum Input Power..... | +5dBm | Storage Temperature Range..... | -65°C to +160°C |
| Continuous Power Dissipation (T _A = +70°C) | | Soldering Temperature (reflow, Note 1)..... | +260°C |
| WLP (derate 10.5mW/°C above +70°C)..... | 840mW | | |

Note 1: Refer to Application Note 1891: *Wafer-Level Packaging (WLP) and its Applications*.



CAUTION! ESD SENSITIVE DEVICE

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

DC ELECTRICAL CHARACTERISTICS

(V_{CC} = 1.6V to 3.6V, no RF signal applied, T_A = -40°C to +85°C. Typical values are at V_{CC} = 3.3V, T_A = +25°C, unless otherwise noted.) (Note 2)

| PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|----------------------|---|-----|-----|------|-------|
| Supply Voltage | | 1.6 | 3.3 | 3.6 | V |
| Supply Current | | | 4.5 | 7 | mA |
| Shutdown Current | V _{SHDN} = 0V | | | 10 | μA |
| Shutdown Logic-Low | | | | 0.45 | V |
| Shutdown Logic-High | | 1.2 | | | V |
| ANT Sense Threshold | Causes autosense to switch to ANT | 75 | 200 | 850 | μA |
| ANT Current Limit | ANT connected to GND ₋ | 20 | 30 | 45 | mA |
| ANT Port Supply Drop | Voltage drop from V _{CC} with 10mA load on ANT | | 75 | | mV |

AC ELECTRICAL CHARACTERISTICS

(V_{CC} = 1.6V to 3.6V, f_{RFIN} = 1575.42MHz, T_A = -40°C to +85°C. Typical values are at V_{CC} = 3.3V, T_A = +25°C, unless otherwise noted.) (Note 2)

| PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|----------------------------|---|-----|---------|-----|-------|
| Minimum RF Input Frequency | | | 1575.42 | | MHz |
| Maximum RF Input Frequency | | | 1610 | | MHz |
| Power Gain | MAX2674 | 13 | 18 | | dB |
| | MAX2676 | 11 | 15 | | |
| Noise Figure | | | 0.75 | | dB |
| In-Band Input IP3 | MAX2674, RF input = f ₀ ±2.5MHz at -40dBm each | | -2 | | dBm |
| | MAX2676, RF input = f ₀ ±2.5MHz at -40dBm each | | +5 | | |
| ANT In-Band Input IP3 | RF input = f ₀ ±2.5MHz at -25dBm each | | +30 | | dBm |

MAX2674/MAX2676

GPS/GNSS LNAs with Antenna Switch and Bias

AC ELECTRICAL CHARACTERISTICS (continued)


(VCC = 1.6V to 3.6V, f_{RFIN} = 1575.42MHz, T_A = -40°C to +85°C. Typical values are at VCC = 3.3V, T_A = +25°C, unless otherwise noted.) (Note 2)

| PARAMETER | CONDITIONS | MIN | TYP | MAX | UNITS |
|-----------------------|---|-----|-----|-----|-------|
| Out-of-Band Input IP3 | MAX2674, RF input = 1713.42MHz, -17dBm and 1851.42MHz, -59dBm | | 3 | | dBm |
| | MAX2676, RF input = 1713.42MHz, -17dBm and 1851.42MHz, -59dBm | | 5 | | |
| Input P2dB | MAX2674, f _{RFIN} = 1580.42MHz | | -7 | | dBm |
| | MAX2676, f _{RFIN} = 1580.42MHz | | -4 | | |
| Input Return Loss | | | 15 | | dB |
| Output Return Loss | | | 15 | | dB |
| Reverse Isolation | | | 45 | | dB |
| ANT Insertion Loss | | | 1.5 | | dB |
| RFIN to ANT Isolation | | | 45 | | dB |

Note 2: Guaranteed by test at T_A = +25°C, guaranteed by design and characterization at T_A = -40°C and T_A = +85°C.

Typical Operating Characteristics

(MAX2674/MAX2676 EV Kit. Typical values are at VCC = 3.3V, T_A = +25°C, unless otherwise specified.)

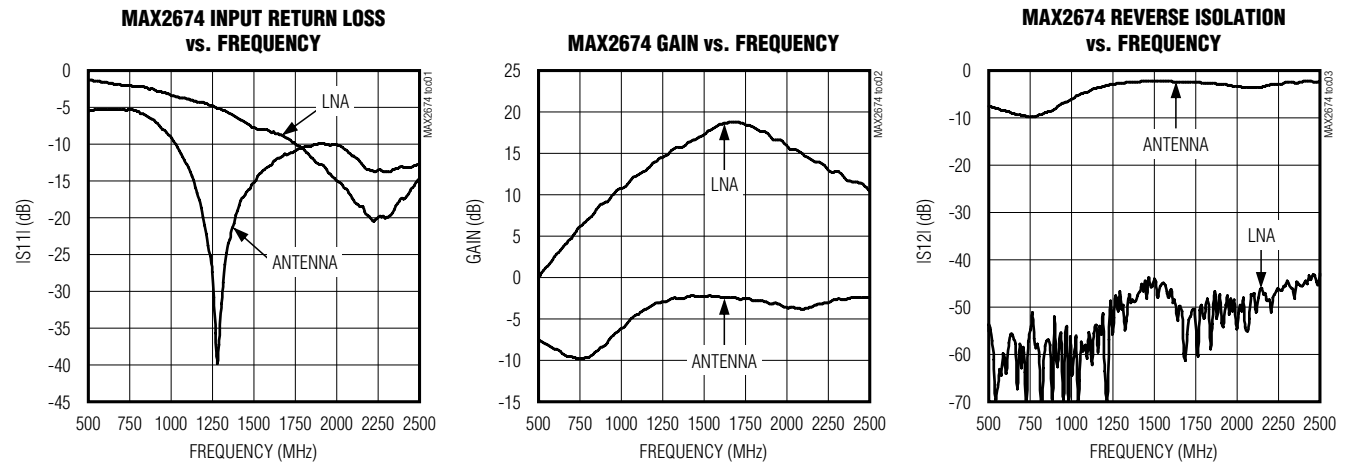


MAX2674/MAX2676

GPS/GNSS LNAs with Antenna Switch and Bias

Typical Operating Characteristics (continued)

(MAX2674/MAX2676 EV Kit. Typical values are at $V_{CC} = 3.3V$, $T_A = +25^\circ C$, unless otherwise specified.)

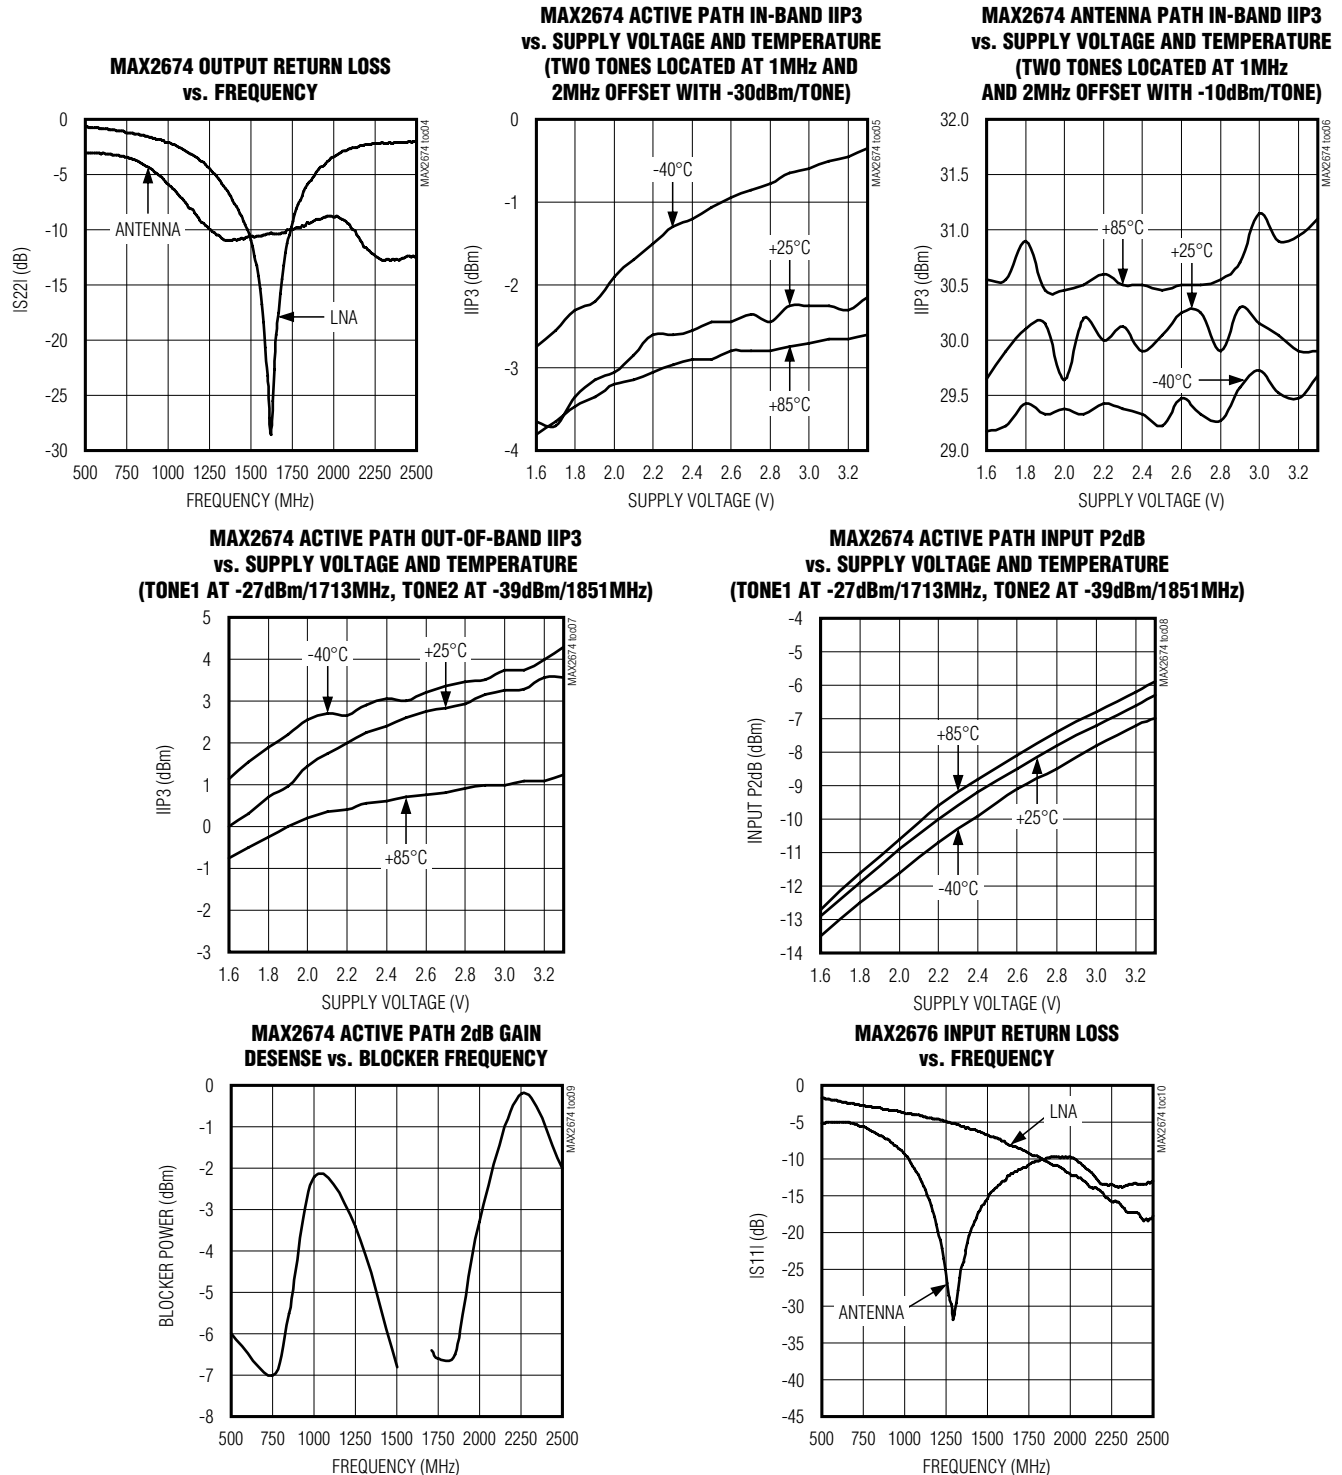


MAX2674/MAX2676

GPS/GNSS LNAs with Antenna Switch and Bias


Typical Operating Characteristics (continued)

(MAX2674/MAX2676 EV Kit. Typical values are at $V_{CC} = 3.3V$, $T_A = +25^\circ C$, unless otherwise specified.)


MAX2676 GAIN vs. FREQUENCY

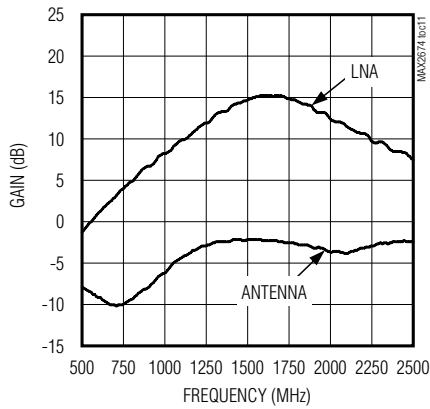


MAX2676 REVERSE ISOLATION vs. FREQUENCY

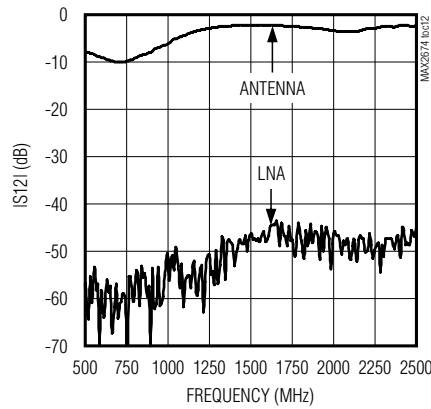


MAX2676 OUTPUT RETURN LOSS vs. FREQUENCY

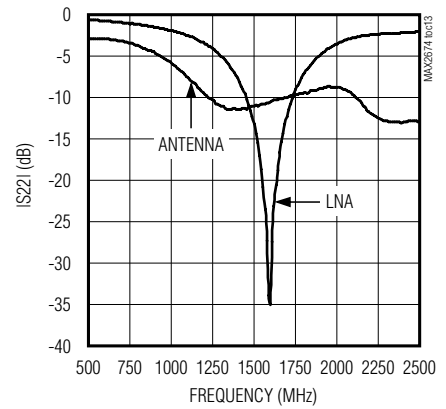


MAX2676 ACTIVE PATH IN-BAND IIP3 vs. SUPPLY VOLTAGE AND TEMPERATURE (TWO TONES LOCATED AT 1MHz AND 2MHz OFFSET WITH -30dBm/TONE)

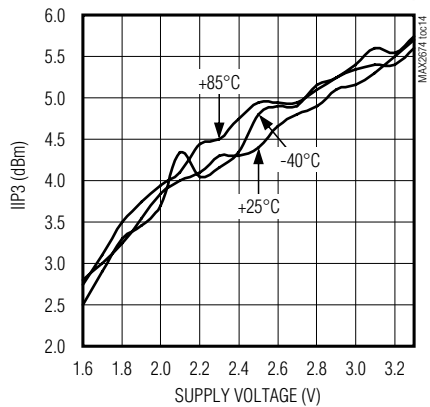


MAX2676 ANTENNA PATH IN-BAND IIP3 vs. SUPPLY VOLTAGE AND TEMPERATURE (TWO TONES LOCATED AT 1MHz AND 2MHz OFFSET WITH -10dBm/TONE)

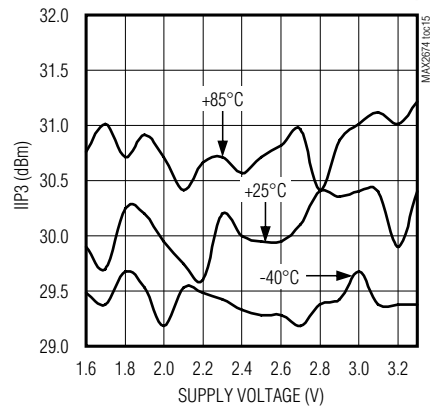


MAX2676 ACTIVE PATH OUT-OF-BAND IIP3 vs. SUPPLY VOLTAGE AND TEMPERATURE (TONE1 AT -27dBm/1713MHz, TONE2 AT -39dBm/1851MHz)

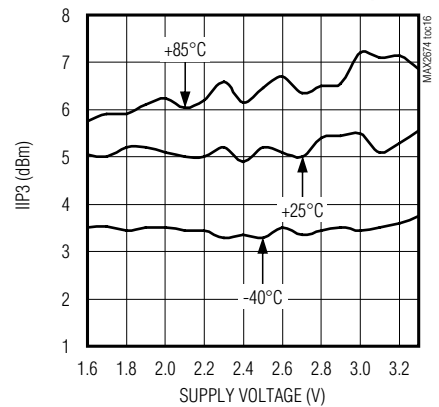

MAX2676 ACTIVE PATH INPUT P2dB vs. SUPPLY VOLTAGE AND TEMPERATURE (TONE1 AT -27dBm/1713MHz, TONE2 AT -39dBm/1851MHz)

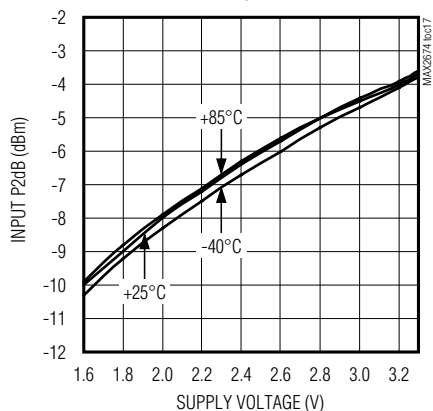


MAX2676 ACTIVE PATH 2dB GAIN DESENSE vs. BLOCKER FREQUENCY

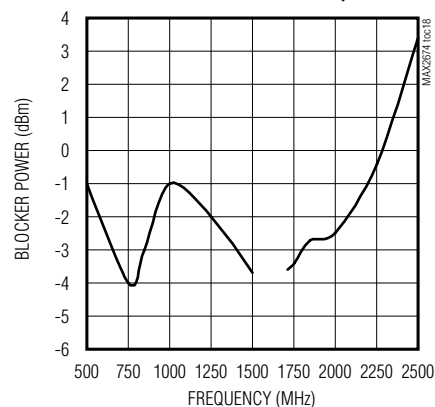

MAX2674/MAX2676

GPS/GNSS LNAs with Antenna Switch and Bias

Bump Configuration

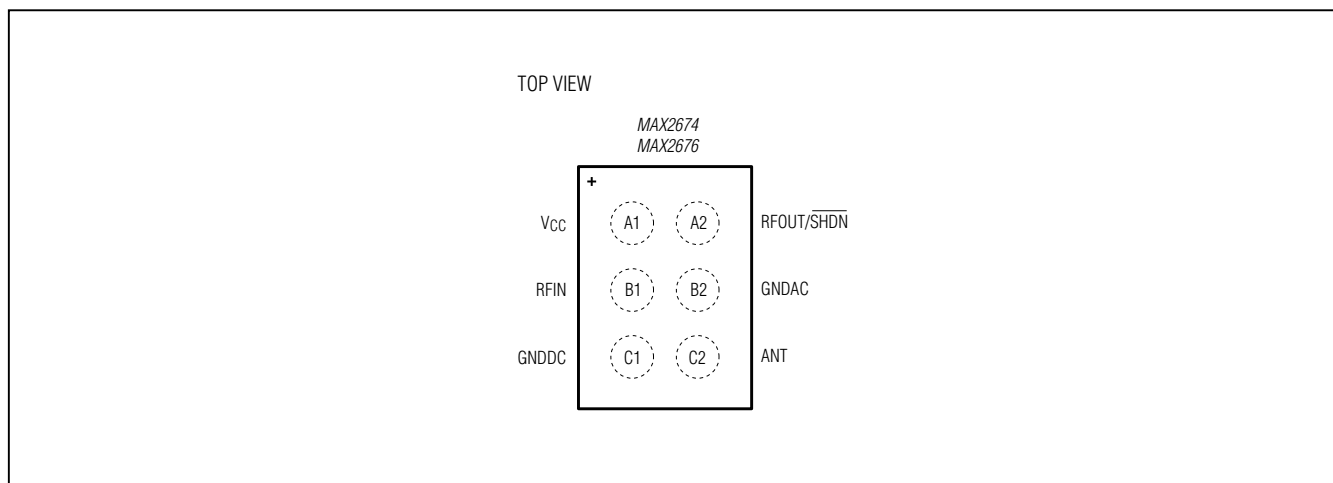

Bump Description

| PIN | NAME | FUNCTION |
|-----|----------------|--|
| A1 | VCC | VCC. Place bypass capacitor as close as possible to the pin. |
| A2 | RFOUT/ SHDN | RF Output and Shutdown Logic Input. Output match is included on-chip. Couple $\overline{\text{SHDN}}$ logic control through a 25k Ω resistor. DC logic-low shuts down the part. |
| B1 | RFIN | RF Input. Requires a DC-blocking capacitor and an external inductor matching component. |
| B2 | GNDAC | Ground for RF Circuits. Connect to the 2nd layer PCB ground plane with a via next to the pad. |
| C1 | GNDDC | Ground for DC and Bias Circuits. Connect to the 2nd layer PCB ground plane with a via next to the pad. |
| C2 | ANT | Antenna Input |

MAX2674/MAX2676

GPS/GNSS LNAs with Antenna Switch and Bias

Detailed Description

The MAX2674/MAX2676 are low-power LNAs designed for GPS/GNSS receiver applications. The devices feature low noise and high linearity in an ultra-small package. They also include an antenna switch and circuitry supporting bias to accommodate external LNA applications.

Input and Output Matching

To achieve optimal performance in noise figure, gain, and IIP3, the devices require one matching inductor at RFIN in series with a DC-blocking capacitor. RFOUT/SHDN is internally matched to 50Ω, eliminating the need for external matching components. At RFOUT/SHDN, an external DC-blocking capacitor should be used to isolate the shutdown control function.

Shutdown Mode

To place the device in shutdown mode, apply logic-low to RFOUT/SHDN through a 25kΩ resistor. An additional DC-blocking capacitor or component is required at RFOUT/SHDN in this case. Apply a logic-high state or no DC bias to turn the part permanently on.

DC Supply Decoupling and Layout

A properly designed PC board (PCB) is essential to any RF microwave circuit. Use controlled-impedance lines on all high-frequency inputs and outputs. Bypass VCC with a decoupling capacitor located close to the device.

For long VCC lines, it may be necessary to add additional decoupling capacitors. Locate these additional capacitors further away from the device package.

Proper grounding of GND_ pins is essential. If the PCB uses a top-side RF ground, connect it directly to the GND_ pins. For a board where the ground is not on the component layer, connect the GND_ pins to the board with multiple vias close to the package.

Antenna Switch Control

The MAX2674/MAX2676 ANT input includes an autodection feature. When no current is drawn from ANT, the switch defaults to normal LNA operation. The pin can be directly connected to an external active antenna. The device automatically switches to the ANT input when an external active antenna is connected.

Refer to www.maximintegrated.com for the MAX2674/MAX2676 EV Kit schematic, layout files, BOM information, and S-parameters.

Table 1. MAX2674 Typical Noise Parameters (VCC = 2.85V, TA = +25°C)

| FREQUENCY (MHz) | NFMIN (dB) | GAMMA_OPT MAG (°) | GAMMA_OPT PHASE (°) | Rn (Ω) |
|-----------------|------------|-------------------|---------------------|--------|
| 1550 | 0.651 | 0.446 | 44.1 | 8.33 |
| 1560 | 0.652 | 0.445 | 44.3 | 8.33 |
| 1570 | 0.654 | 0.445 | 44.6 | 8.32 |
| 1580 | 0.655 | 0.444 | 44.8 | 8.31 |
| 1590 | 0.656 | 0.444 | 45.1 | 8.3 |
| 1600 | 0.657 | 0.443 | 45.4 | 8.3 |

Table 2. MAX2676 Typical Noise Parameters (VCC = 2.85V, TA = +25°C)

| FREQUENCY (MHz) | NFMIN (dB) | GAMMA_OPT MAG (°) | GAMMA_OPT PHASE (°) | Rn (Ω) |
|-----------------|------------|-------------------|---------------------|--------|
| 1550 | 0.744 | 0.441 | 53.1 | 8.7 |
| 1560 | 0.746 | 0.44 | 53.4 | 8.68 |
| 1570 | 0.748 | 0.439 | 53.7 | 8.66 |
| 1580 | 0.75 | 0.438 | 54 | 8.65 |
| 1590 | 0.751 | 0.437 | 54.3 | 8.63 |
| 1600 | 0.753 | 0.436 | 54.7 | 8.62 |

MAX2674/MAX2676

GPS/GNSS LNAs with Antenna Switch and Bias

Chip Information

PROCESS: SiGe BiCMOS

Package Information

For the latest package outline information and land patterns, go to www.maximintegrated.com/packages. Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO. | LAND PATTERN NO. |
|--------------|--------------|-------------------------|--|
| 6 WLP | W61B1+1 | 21-0217 | Refer to Application Note 1891 |

MAX2674/MAX2676

GPS/GNSS LNAs with Antenna Switch and Bias

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|-----------------|---------------|--|---------------|
| 0 | 12/10 | Initial release | — |
| 1 | 7/15 | Removed Avionics and Military from <i>Applications</i> | 1 |



Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.

Maxim Integrated 160 Rio Robles, San Jose, CA 95134 USA 1-408-601-1000

9