

FEATURES

DO-178C/DO-254 Design Assurance Level (DAL) B certification intent
ED-12C certification intent
Triaxial, digital gyroscope, $\pm 450^\circ/\text{sec}$ dynamic range
 $\pm 0.018^\circ$ axis-to-axis misalignment error
 $6^\circ/\text{Hr}$ in-run bias stability
 $0.3^\circ/\sqrt{\text{Hr}}$ angular random walk
 $0.045^\circ/\text{sec}$ nonlinearity
Triaxial, digital accelerometer, $\pm 5 g$ dynamic range
Triaxial, delta angle and delta velocity outputs
Factory calibrated sensitivity, bias, and axial alignment
Calibration temperature range: -40°C to $+85^\circ\text{C}$
Serial peripheral interface (SPI) compatible
Programmable operation and control
Automatic and manual bias correction controls
4 FIR filter banks, 120 configurable taps
Digital I/O: data ready alarm indicator, external clock
Alarms for condition monitoring
Power-down/sleep mode for power management
Optional external sample clock input: up to 2.4 kHz
Continuous self test of inertial sensors
On demand self test of inertial sensors
Continuous CRC-based memory testing
Single-supply operation: 3.0 V to 3.6 V
2000 g mechanical shock survivability
Operating temperature range: -40°C to $+105^\circ\text{C}$

APPLICATIONS

Attitude and heading reference systems
Platform stabilization and control
Unmanned vehicle navigation
Robotics and instrumentation

GENERAL DESCRIPTION

The ADIS16487 is a complete inertial system that includes a triaxis gyroscope and a triaxis accelerometer. Each inertial sensor in the ADIS16487 combines industry leading iMEMS® technology with signal conditioning that optimizes dynamic performance. The factory calibration characterizes each sensor for sensitivity, bias, alignment, and linear acceleration (gyroscope bias). As a result, each sensor has its own dynamic compensation formulas that provide accurate sensor measurements.

The ADIS16487 provides a simple, cost effective method for integrating accurate, multiaxis inertial sensing into industrial systems, especially when compared with the complexity and investment associated with discrete designs. All necessary motion testing and calibration are part of the production process at the factory, greatly reducing system integration time. Tight orthogonal alignment simplifies inertial frame alignment in navigation systems. The SPI and register structure provide a simple interface for data collection and configuration control.

For interests requiring evidence of avionics or safety critical applicability, this device supports certification to DO-178C/DO-254 DAL B within systems, which have completed either U.S. Federal Aviation Administration (FAA) or European Aviation Safety Agency (EASA) audits, and can under specific commercial arrangements be supported by preassessment and audit acceptance artifacts.

The ADIS16487 uses the same footprint and connector system as the [ADIS16375](#), [ADIS16480](#), [ADIS16485](#), and [ADIS16488A](#), which greatly simplifies the upgrade process. The ADIS16487 is packaged in a module that is approximately 47 mm × 44 mm × 14 mm and includes a standard connector interface.

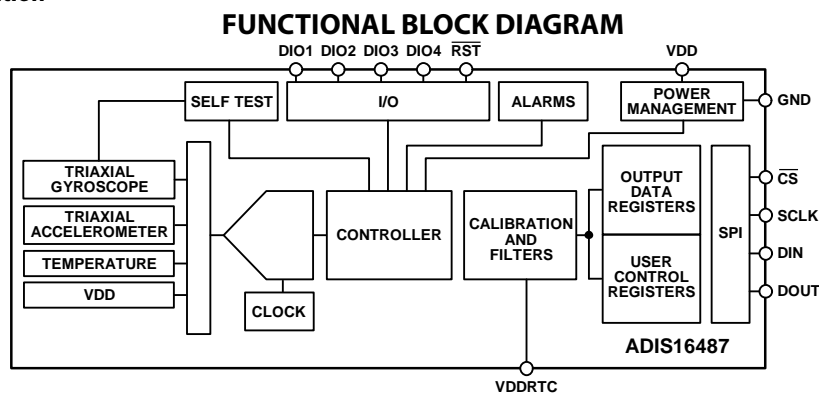


Figure 1.

For more information about the ADIS16487, contact the Analog Devices, Inc., [Customer Interaction Center](#) to connect with a technical support specialist.

Rev. Sp0

[Document Feedback](#)

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
 Tel: 781.329.4700 ©2018 Analog Devices, Inc. All rights reserved.
[Technical Support](#) www.analog.com

NOTES