





DIP8-pin type with reinforced insulation

**PhotoMOS®
GE 2 Form A
(AQW210EH)**

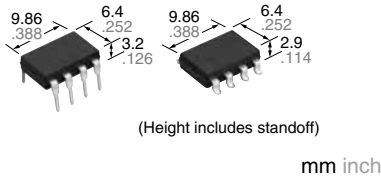

RoHS compliant

FEATURES

- 1. Reinforced insulation of 5,000 V**
More than 0.4 mm internal insulation distance between inputs and outputs. Con-forms to EN41003, EN60950 (reinforced insulation).
- 2. Applicable for 2 Form A use as well as two independent 1 Form A use**
- 3. Controls low-level analog signals**
PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.
- 4. High sensitivity and high speed response**
Can control max. 0.14 A load current with 5 mA input current. Fast operation speed of Typ. 0.5 ms (AQW210EH).
- 5. Low-level off state leakage current of max. 1 μ A**

TYPICAL APPLICATIONS

- Modem
- Telephone equipment
- Electricity, plant equipment
- Security equipment
- Sensing equipment

TYPES

| | I/O isolation voltage | Output rating* | | Package | Part No. | | | | Packing quantity | |
|----------------|-----------------------|----------------|--------|----------|-----------------------|------------------------|------------|------------|--------------------------------------------------------|-----------------------------|
| | | | | | Through hole terminal | Surface-mount terminal | | Tube | Tape and reel | |
| | | | | | | Tube packing style | | | | Tape and reel packing style |
| AC/DC dual use | Reinforced 5,000 Vrms | 60 V | 500 mA | DIP8-pin | AQW212EH | AQW212EHA | AQW212EHAX | AQW212EHAZ | 1 tube contains: 50 pcs. 1 batch contains: 500 pcs. | 1,000 pcs. |
| | | 350 V | 120 mA | | AQW210EH | AQW210EHA | AQW210EHAX | AQW210EHAZ | | |
| | | 400 V | 100 mA | | AQW214EH | AQW214EHA | AQW214EHAX | AQW214EHAZ | | |
| | | 600 V | 40 mA | | AQW216EH | AQW216EHA | AQW216EHAX | AQW216EHAZ | | |

*Indicate the peak AC and DC values.

Note: The surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


| Item | | Symbol | AQW212EH(A) | AQW210EH(A) | AQW214EH(A) | AQW216EH(A) | Remarks |
|-------------------------|-------------------------|------------|-----------------------------|--------------------|-------------------|--------------------|--------------------------------------------------------|
| Input | LED forward current | I_F | 50mA | | | | |
| | LED reverse voltage | V_R | 5V | | | | |
| | Peak forward current | I_{FP} | 1A | | | | f = 100 Hz, Duty factor = 0.1% |
| | Power dissipation | P_{in} | 75mW | | | | |
| Output | Load voltage (peak AC) | V_L | 60 V | 350 V | 400 V | 600 V | |
| | Continuous load current | I_L | 0.5 A (0.6 A) | 0.12 A (0.14 A) | 0.1 A (0.13 A) | 0.04 A (0.05 A) | Peak AC, DC (): in case of using only 1 channel |
| | Peak load current | I_{peak} | 1.5 A | 0.36 A | 0.3 A | 0.12 A | 100 ms (1 shot), $V_L = DC$ |
| | Power dissipation | P_{out} | 800mW | | | | |
| Total power dissipation | | P_T | 850mW | | | | |
| I/O isolation voltage | | V_{iso} | 5,000 Vrms | | | | |
| Ambient temperature | Operating | T_{opr} | -40 to +85°C -40 to +185°F | | | | (Non-icing at low temperatures) |
| | Storage | T_{stg} | -40 to +100°C -40 to +212°F | | | | |

GE 2 Form A (AQW210EH)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item | | Symbol | AQW212EH(A) | AQW210EH(A) | AQW214EH(A) | AQW216EH(A) | Condition |
|----------------------------------|---------------------------|----------------------------------------|-------------|-------------|-------------|----------------------|-----------------------------------------------------------|
| Input | LED operate current | Typical | 1.2mA | | | | I _L =Max. |
| | | Maximum | 3.0mA | | | | |
| | LED turn off current | Minimum | 0.4mA | | | | I _L =Max. |
| | | Typical | 1.1mA | | | | |
| LED dropout voltage | Typical | 1.25 V (1.14 V at I _F =5mA) | | | | I _F =50mA | |
| | Maximum | 1.5V | | | | | |
| Output | On resistance | Typical | 0.83Ω | 18Ω | 26Ω | 52Ω | I _F =5mA I _L =Max. Within 1 s |
| | | Maximum | 2.5Ω | 25Ω | 35Ω | 120Ω | |
| | Off state leakage current | Maximum | 1μA | | | | I _F =0mA V _L =Max. |
| Transfer characteristics | Turn on time* | Typical | 1ms | 0.5ms | | | I _F =5mA I _L =Max. |
| | | Maximum | 4ms | 2.0ms | | | |
| | Turn off time* | Typical | 0.08ms | | | 0.04ms | I _F =5mA I _L =Max. |
| | | Maximum | 1.0ms | | | | |
| | I/O capacitance | Typical | 0.8pF | | | | f = 1MHz V _B = 0V |
| Maximum | | 1.5pF | | | | | |
| Initial I/O isolation resistance | Minimum | R _{iso} | 1,000MΩ | | | | 500V DC |

*Turn on/Turn off time

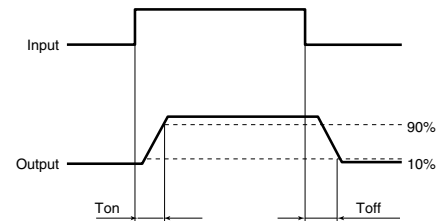

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

| Item | Symbol | Number of used channels | Min. | Max. | Unit |
|-------------|-------------------------|-------------------------|------------|-------------------|------|
| LED current | I _F | | 5 | 30 | mA |
| AQW212EH(A) | Load voltage (Peak AC) | V _L | — | 48 | V |
| | Continuous load current | I _L | 1ch 2ch | — 0.6 0.5 | A |
| AQW210EH(A) | Load voltage (Peak AC) | V _L | — | 280 | V |
| | Continuous load current | I _L | 1ch 2ch | — 0.14 0.12 | A |
| AQW214EH(A) | Load voltage (Peak AC) | V _L | — | 320 | V |
| | Continuous load current | I _L | 1ch 2ch | — 0.13 0.1 | A |
| AQW216EH(A) | Load voltage (Peak AC) | V _L | — | 480 | V |
| | Continuous load current | I _L | 1ch 2ch | — 0.05 0.04 | A |


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA


1-(1). Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
-40 to +185°F

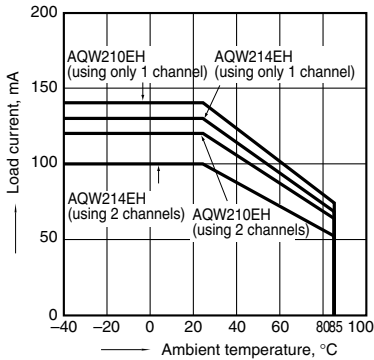


1-(2). Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
-40 to +185°F

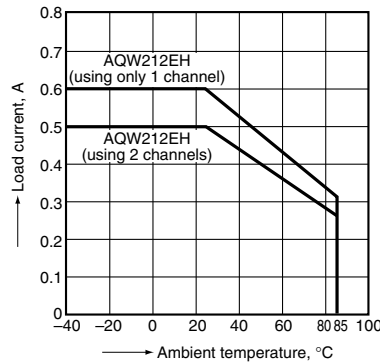


1-(3). Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C
-40 to +185°F

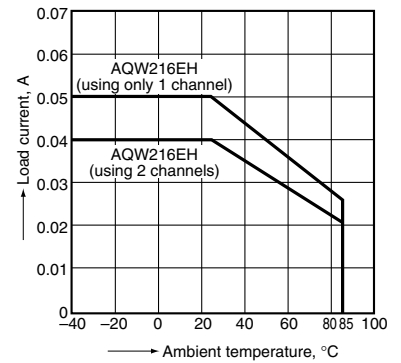


2-(1). On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

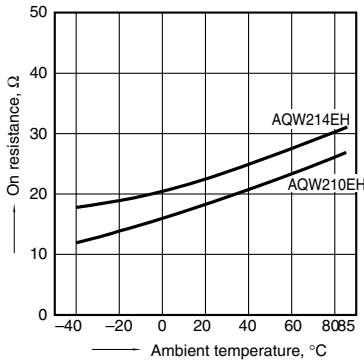


2-(2). On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

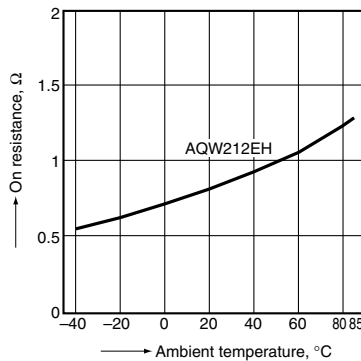


2-(3). On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

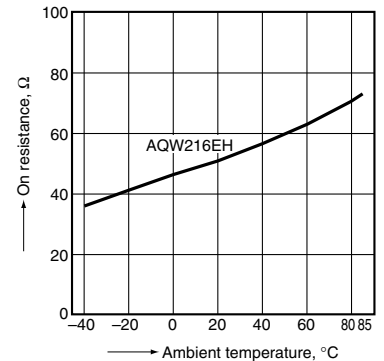


3. Turn on time vs. ambient temperature characteristics

Sample: All types
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

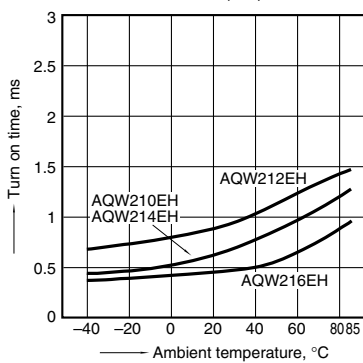


4. Turn off time vs. ambient temperature characteristics

Sample: All types
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

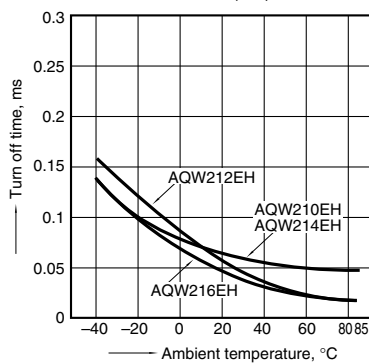


5. LED operate current vs. ambient temperature characteristics

Sample: All types; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

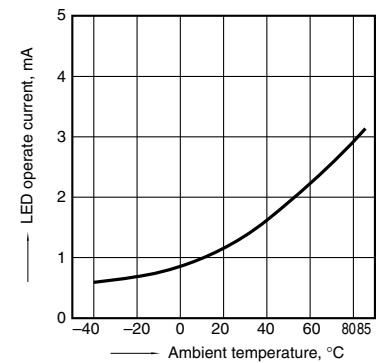


6. LED turn off current vs. ambient temperature characteristics

Sample: All types; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

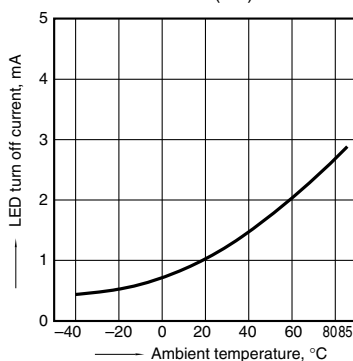


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types; LED current: 5 to 50 mA

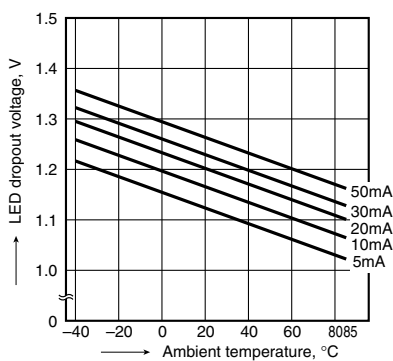

8-(1). Current vs. voltage characteristics of output at MOS portion


Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F



GE 2 Form A (AQW210EH)


8-(2). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

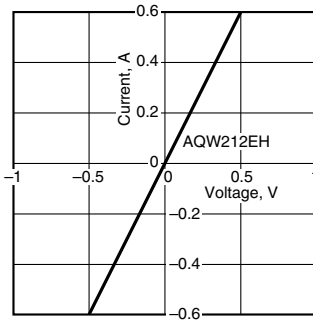


8-(3). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F




9-(1). Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

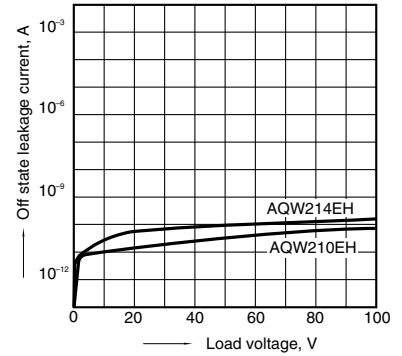


9-(2). Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Ambient temperature: 25°C 77°F

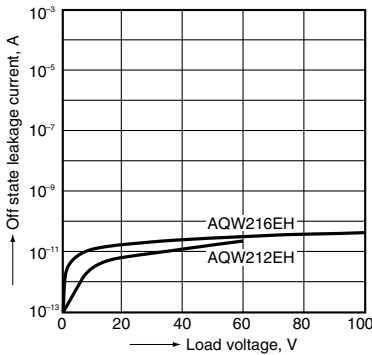


10. Turn on time vs. LED forward current characteristics

Sample: All types
Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C 77°F

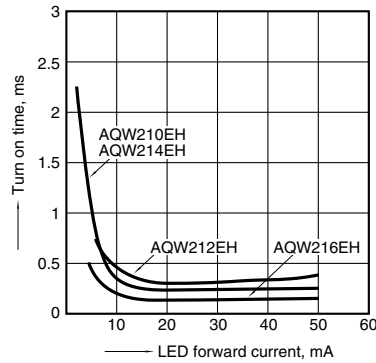


11. Turn off time vs. LED forward current characteristics

Sample: All types
Measured portion: between terminals 5 and 6, 7 and 8;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C 77°F

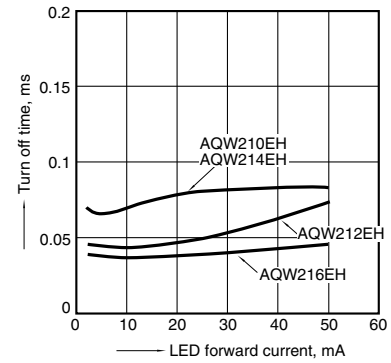


12-(1). Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

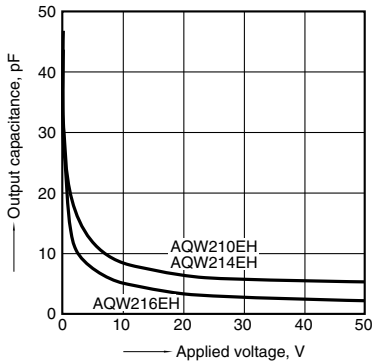

12-(2). Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

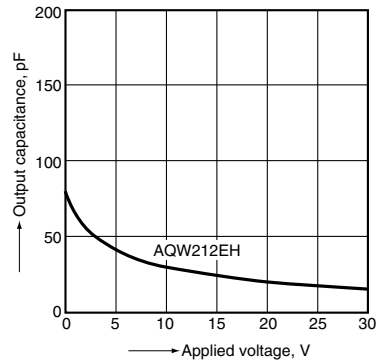

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017