



# BAW56 / BAV70 / BAV99 / BAL99

## SURFACE MOUNT SWITCHING DIODES

**VOLTAGE** 100 Volts    **POWER** 250mWatts


**SOT-23**    Unit : inch(mm)

### FEATURES

- Fast switching speed.
- Surface mount package Ideally Suited for Automatic insertion
- Electrically Identical to Standard JEDEC
- High Conductance
- In compliance with EU RoHS 2002/95/EC directives

### MECHANICAL DATA

- Case: SOT-23, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026
- Apporx. Weight: 0.0003 ounce, 0.0084 gram

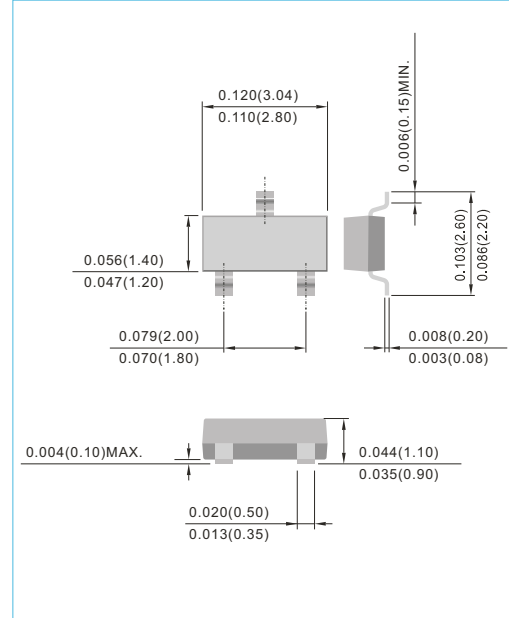





### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. For capacitive load, derate current by 20%.

| PARAMETER   | SYMBOL                             | BAW56   | BAV70          | BAV99  | BAL99       | UNITS           |
|---|------------------------------------|---|----------------|--------|-------------|-----------------|
| Marking Code  | -                                  | JC  | JA             | JB     | JF          | -               |
| Reverse Voltage   | $V_R$                              | 75  |                |        |             | V               |
| Peak Reverse Voltage  | $V_{RM}$                           | 100   |                |        |             | V               |
| Rectified Current (Average), Half Wave Rectification with Resistive Load and $f \geq 50$ Hz | $I_O$                              | 150   |                |        |             | mA              |
| Peak Forward Surge Current, 0.001ms   | $I_{FSM}$                          | 4.0   |                |        |             | A               |
| Power Dissipation Derate Above 25°C   | $P_{TOT}$                          | 250   |                |        |             | mW              |
| Maximum Forward Voltage   | $V_F$                              | 0.715 @ $I_F=1mA$<br>0.855 @ $I_F=10mA$<br>1.0 @ $I_F=50mA$<br>1.25 @ $I_F=150mA$ |                |        |             | V               |
| Maximum DC Reverse Current at 25V<br>75V  | $I_R$                              | 0.03<br>2.5   |                |        |             | $\mu A$         |
| Maximum Junction Capacitance (Notes 1)  | $C_J$                              | 1.5   |                |        |             | pF              |
| Maximum Reverse Recovery Time (Notes 2)   | $t_{rr}$                           | 4.0   |                |        |             | ns              |
| Typical Thermal Resistance  | $R_{\theta JA}$<br>$R_{\theta JC}$ | 360<br>205  |                |        |             | $^{\circ}C / W$ |
| Junction Temperature Range  | $T_J$                              | -55 to +150   |                |        |             | $^{\circ}C$     |
| Circuit Figure  | -                                  | Common Anode  | Common Cathode | Series | Single(Alt) | -               |


NOTE:

1.  $C_J$  at  $V_R=0$ ,  $f=1MHz$
2. From  $I_F=10mA$  to  $I_R=1mA$ ,  $V_R=6Volts$ ,  $R_L=100\Omega$







**BAW56 / BAV70 / BAV99 / BAL99**

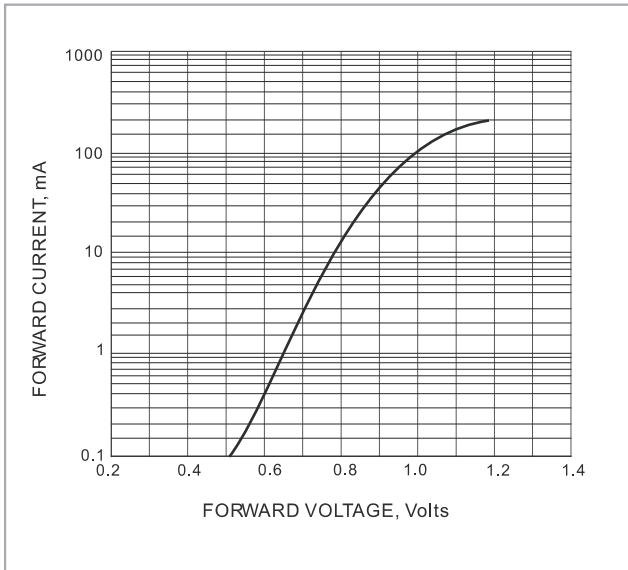


**FIG. 1-TYPICAL FORWARD CHARACTERISTIC**

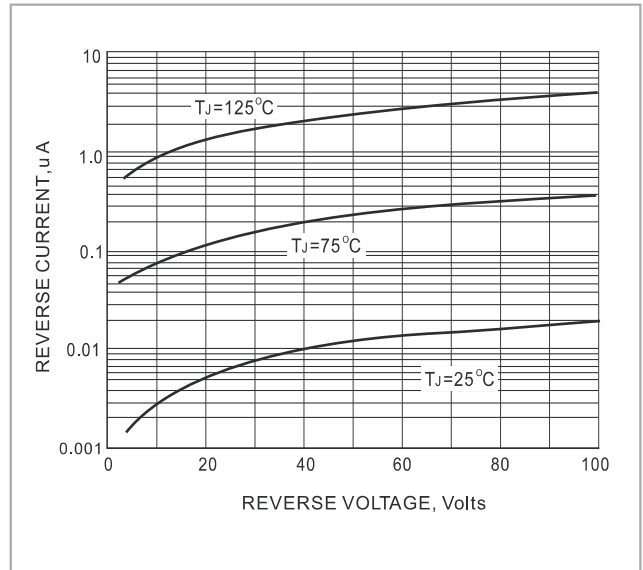

**FIG. 2-TYPICAL REVERSE CHARACTERISTICS**

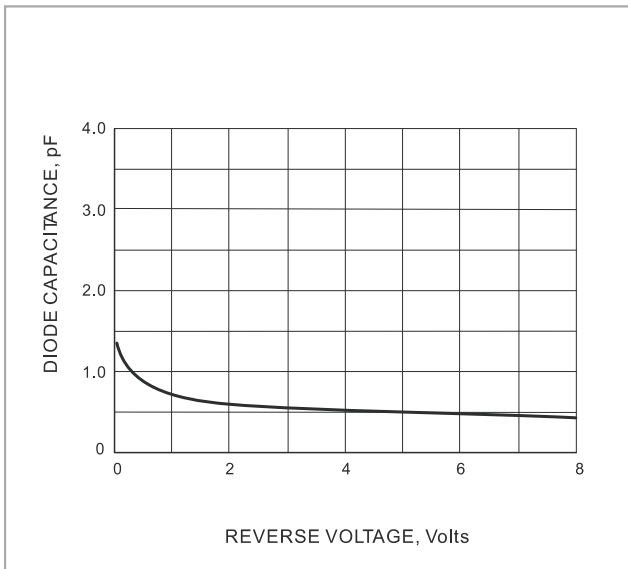

**FIG. 3 TYPICAL JUNCTION CAPACITANCE**

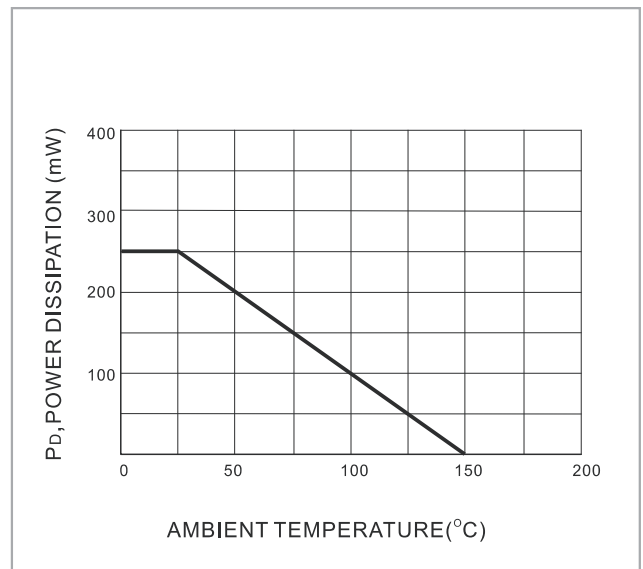


**FIG. 4 POWER DERATING CURVE**



## BAW56 / BAV70 / BAV99 / BAL99

### MOUNTING PAD LAYOUT

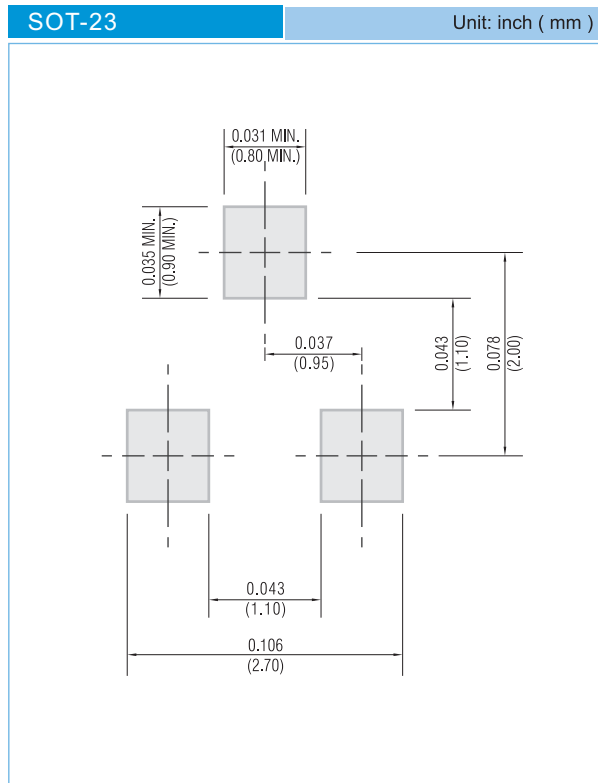

### ORDER INFORMATION

- Packing information
  - T/R - 12K per 13" plastic Reel
  - T/R - 3K per 7" plastic Reel

### LEGAL STATEMENT

#### Copyright PanJit International, Inc 2011

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.