



Peer Administrator Help Manual


1993-2013 Peer Software Inc. All Rights Reserved.

Updated Wednesday, February 20, 2013

Table of Contents

Peer Administrator Help	1
Getting Started	1
Menu	4
File Menu	4
Edit Menu	5
View Menu	6
Help Menu	9
PeerSync Activity Panel	10
PeerSync Activity Panel	10
PeerSync Activity Pop-Up Menu	14
PeerLock Activity Panel	17
PeerLock Status	17
Locked List	20
Released List	22
Status Popup Menu	25
Locked/Released List Popup Menu	26
Admin Events Panel	27
Admin Events Panel	27
Admin Events Pop-Up Menu	29
Settings Window	30
General Tab	30
Reporting Tab	32
Email Alerts	33
Color Key Tab	35
Domain List Tab	36
Profile Operations	37
Color Legend Panel	42
Profile Editor	43
Status Display	44
License	47
Index	51

Peer Administrator Help

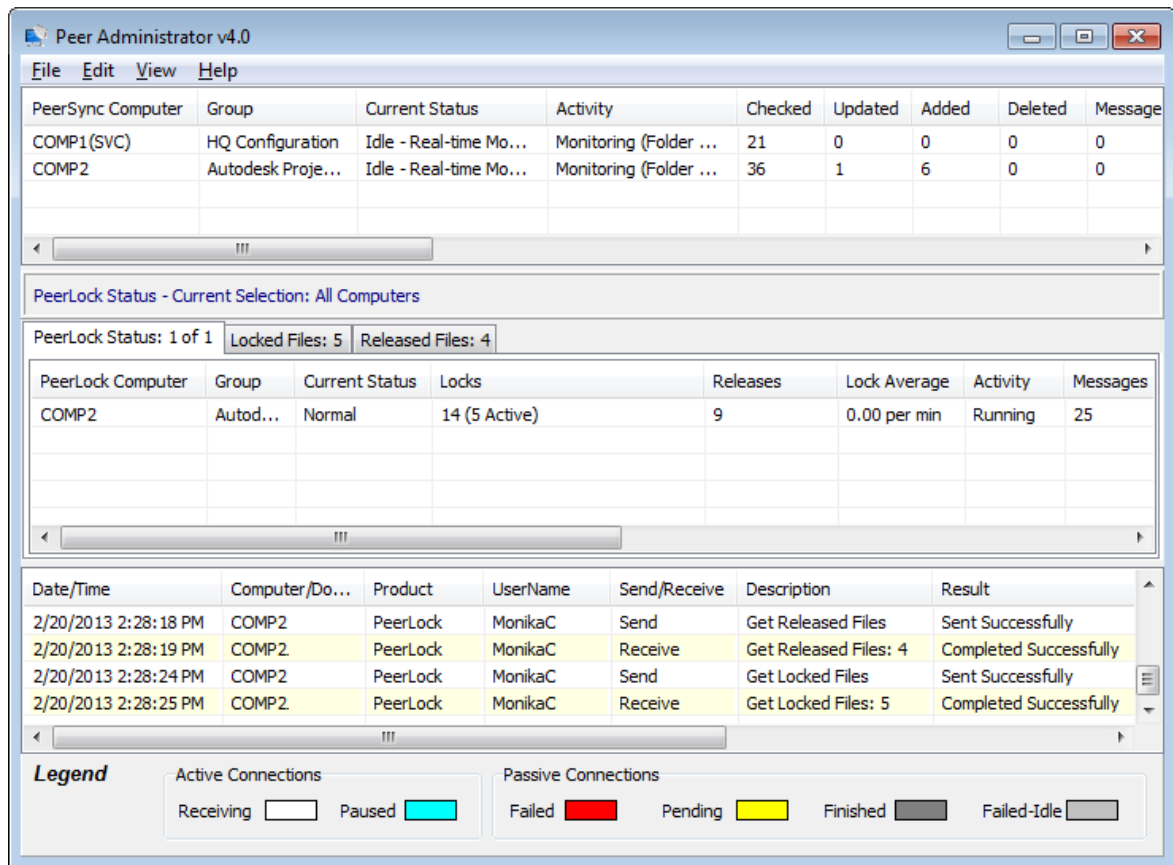

The manufacturer of Peer Administrator™ makes no warranties, implied or otherwise, for use of this product. User assumes all responsibility for any data loss or damage.

Copyright © 1993-2013 Peer Software Inc. All Rights Reserved [Privacy Policy](#)

Peer Administrator™, PeerSync™, and PeerLock™ are registered trademarks of Peer Software, Inc. Reproduction in whole or in part without permission is strictly prohibited.

The Peer Administrator Help Manual was built on Wednesday, February 20, 2013

Getting Started

Welcome to the Peer Administrator v4.0 software. This software allows for the ability to monitor PeerSync™ and PeerLock™ activity across the LAN for the centralized viewing of all PeerSync™ and PeerLock™ activity on the network. The Peer Administrator is a receptor application that receives specific information from running PeerSync™ and PeerLock™ applications on the network. As a receptor, it displays changes from the PeerSync™ and PeerLock™ applications based solely on their ability to connect and transmit that information successfully to the Peer Administrator.

New Enhancements

The [Peer Administrator](#) introduces new capabilities that simplify deploying, configuring, and managing multiple PeerSync instances throughout the network. With just a few clicks, administrators can configure, update, distribute and monitor all running instances of PeerSync. Email Alerts may be enabled for immediate status notifications.

Prerequisites

1. Peer Administrator v4.0 should be installed on any Windows computer on the network with access to all other computers running PeerSync™ and/or PeerLock™. From the computer running Peer Administrator you need to be able to navigate and access the machines running PeerSync™ and/or PeerLock™ through Network Neighborhood or an Explorer window. A trust must exist between different domains within the same network for the Peer Administrator to be able to receive status across domains. Your firewall also needs to allow for broadcast traffic between the Peer Administrator and PeerSync and PeerLock.
2. If Peer Administrator resides on a separate subnet than PeerSync,™ then you will need to add the /GO:MachineName or the /GO:DomainName command line argument where MachineName and DomainName represent the name and the domain of the machine on which the Peer Administrator is running.
3. Alternatively, if the Peer Administrator is having problems receiving status information from PeerSyncs™ and PeerLocks™ running on the domain or across the VPN, open the [Domain List](#) dialog, right-click and select "Add New Item". Enter the name of the machine where PeerSync™ and PeerLock™ reside.
4. In order to be able to utilize all functions of the Peer Administrator product we recommend using PeerSync™ versions 7.3.2 or higher and PeerLock™ versions 2.0 or higher. However, you may still be able to receive limited status display information from earlier versions of PeerSync™.

Limitations/Comments

1. PeerSync™ and the Peer Administrator utilize Microsoft mail slots for communication purposes. This method ensures that all communications will be secured by the built in security of your Microsoft Windows network environment and no additional security methods need to be implemented. In other words, if the running applications have the privileges to access each others information, then the mail slots will allow interactive communication. Otherwise communication will be denied.
2. The Peer Administrator and PeerSync™ both use the same mail slot to send and receive status information. Therefore running both products on the same computer will limit the status display within PeerSync™ and activity reporting in the Peer Administrator. A solution to this would be to disable status display in the PeerSync™ Profiler by going to the Options/Commands window, click on Display Options, and un-check Display status in Profiler (or un-check Enable Basic Display and Enable Advanced Display in version 9.0 or newer). Make sure you save and restart PeerSync™ and the Peer Administrator.
3. If the computer on which the Peer Administrator is running cannot navigate to or access the

machines on which PeerSync™ and/or PeerLock™ are running through Network Neighborhood or an Explorer window, then communication cannot take place between the applications.

4. If a connection is lost, the implication is that PeerSync™ and PeerLock™ are not running, however, that may not be the case. PeerSync™ and PeerLock™ may be running fine but the network path between the applications has been compromised.
5. Only a single copy of the Peer Administrator can run on a computer.
6. For PeerSync™ versions older than 7.3.2, please enable the Send status information to Peer Administrator option from the Options/Commands > Display Options window.

Peer Administrator Installations and Registration

Peer Administrator is shipped (downloaded) in a full installation program. To run, simply double click on the executable file from the explorer (or select the application from the Windows Start menu).

Evaluation copies do not require user information and passwords. Registration copies require you to enter a Registration Key into the Register Software Screen. When purchased, Peer Software will send the Authorization Key required to unlock the Peer Administrator evaluation. This key is to be entered during the installation of the software.

If this is an unregistered or evaluation copy of Peer Administrator, you can register it with Peer Software, Inc. as a fully licensed copy by providing credit card information via phone or secure Internet registration, or by sending a check or money order to the address below (see included "readme.txt" file for pricing information).

Register online via secure internet credit card registration at <http://www.peersoftware.com>

Register by phone via credit card by calling:
703.763.7700 between the hours of 9:00 AM and 5:00 PM EST

Register by mail, send check or money order to:
Peer Software, Inc.
5900 Fort Drive, Suite 415
Centreville, NY 20121

Upgrade Information

As new updates/changes become available, updated versions of the software will be posted on our web page <http://www.peersoftware.com>. Check this page periodically to download the latest executables. Your Authorization Key will continue to work with updated versions unless a major release is issued, or Peer Administrator is installed in a different folder than the previously installed/authorized version. Please refer to the WhatsNew and/or ReadMe files shipped with the Peer Administrator installation for the latest upgrade information.

To upgrade, double-click on the installation file (peeradmin40.exe) in the Explorer window, or choose "Run" from the Start Menu and then select the application. If you are upgrading the

current version of Peer Administrator (3.6 to 4.0) simply install the application over your existing Peer Administrator and the previous version will be backed up in a sub-folder called 'BACKUP' (if the option to keep a backup is selected during the installation).

If you are evaluating a new version of Peer Administrator 4.0 and you already have an existing copy of Peer Administrator 3.6 or older, please select a new directory during the installation.

Product Support

All support of Peer Administrator will be handled on our website (<http://www.peersoftware.com>) support page for this product.

Terms And Conditions

Read [License](#) agreement before using this program.

Suggestions, Comments, or Requests for Support:

Peer Software, Inc.
5900 Fort Drive, Suite 415
Centreville, NY 20121
Phone: 703.763.7700
FAX: 703.763.7705
Email: support@peersoftware.com

The manufacturer of Peer Administrator makes no warranties, implied or otherwise, for use of this product. User assumes all responsibility for any data loss or damage.


Copyright © 1993-2013 Peer Software Inc. All Rights Reserved [Privacy Policy](#)

Peer Administrator, PeerSync, and PeerLock are registered trademarks of Peer Software, Inc.
Reproduction in whole or in part without permission is strictly prohibited.

The Peer Administrator Help Manual was built on Wednesday, February 20, 2013

Menu


File Menu



File Menu	
Save Defaults	This option gets displayed in the File menu. When selected, the Peer Administrator will store out all interface settings, including positions of windows, into the PSOBSDEF.CFG file.


	By default interface changes will only be saved when the application closes.
Exit	<p>Terminates the Peer Administrator. If the "Save Content on Close" option is enabled for Reporting the Peer Administrator will prompt you for a report path upon closing the application. This setting is enabled by default.</p> <p>* If the Terminate Remote Link on Close Option is enabled, each connected PeerSync™ and PeerLock™ will be notified to stop reporting information across the network when the Peer Administrator is terminated reducing unnecessary network traffic. This change does not affect communication to other Peer Administrators running on the network.</p> <p>* Note: Option available for PeerSync™ versions 7.3.2 or higher.</p>

Edit Menu

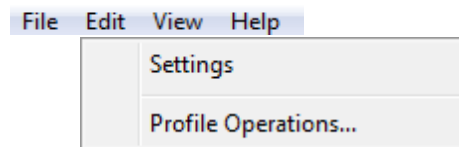

Edit Menu	
Settings	Opens the Settings dialog box/window for additional Peer Administrator configuration such as color key settings, listing of available domains , reporting , activity_monitor options, and other miscellaneous settings.
Profile Operations...	Selecting this option will open the Profile Operations dialog which supports functionality such as Stopping, Starting, Pausing PeerSync™ services and editing/submitting Profile changes.

View Menu

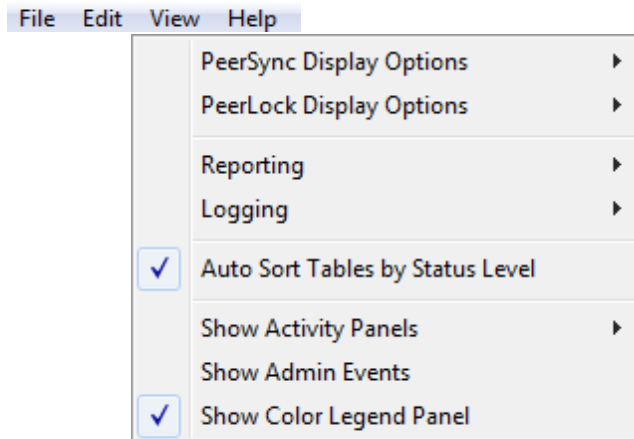


View Menu							
PeerSync Display Options	Refresh PeerSync Display F5 Clears and repopulates all active connections from the PeerSync Activity Table .						
	Clear/Refresh Entries... Clears or refreshes the following PeerSync Activity Table entries:						
	<table><tr><td>Active</td><td>Refreshes all connections that are active (receiving or paused).</td></tr><tr><td>Passive</td><td>Refreshes all passive connections. Completed, terminated, or failed Profiles will be cleared from the list.</td></tr><tr><td>All</td><td>Refreshes the PeerSync Activity Table to display new running Profiles and clearing completed, failed, or terminated sessions.</td></tr></table>	Active	Refreshes all connections that are active (receiving or paused).	Passive	Refreshes all passive connections. Completed, terminated, or failed Profiles will be cleared from the list.	All	Refreshes the PeerSync Activity Table to display new running Profiles and clearing completed, failed, or terminated sessions.
	Active	Refreshes all connections that are active (receiving or paused).					
	Passive	Refreshes all passive connections. Completed, terminated, or failed Profiles will be cleared from the list.					
All	Refreshes the PeerSync Activity Table to display new running Profiles and clearing completed, failed, or terminated sessions.						
Note: These are global settings which apply to all tabs/groups within the PeerSync Activity Table .							
Re-Send Connection Requests Broadcasts message to all PeerSync™ Profiles running within the designated domain to begin transmitting status information to the Peer Administrator.							
Use Tab Group Disabled by default, this option creates Tabs for all the items in the PeerSync Activity Table based on their Profile names. All Profiles running with the same name will be grouped under the same Tab. The name of each Tab becomes the name of the Profiles running in that group followed by two values (x/y). The first (x) represents the number of Failed or Not Responding Profiles in the group and the second (y) represents the total number of Profiles in the group. By default the Tabs will be displayed on top of the PeerSyncActivity Table in multiple							

	rows/lines.
PeerLock Display Options	<p>Refresh PeerLock Display F5 Clears and repopulates all lock entries from the Locked List.</p>
	<p>Re-Send Connection Requests Broadcasts message to all PeerLocks™ running within the designated domain to begin transmitting status information to the Peer Administrator.</p>
	<p>Auto Refresh Lists when Changing Tabs Enabled by default, this option causes the PeerLock Locked Files and Released Files lists to be refreshed when changing tabs. Otherwise, these lists only get updated when clicking on the Refresh Released Files link above the list at the right or by hitting F5 or F6.</p>
	<p>Auto Refresh Lists after Releasing Locks Enabled by default, this option causes PeerLock to refresh the Locked Files and Released Files lists after manually releasing one or more locks.</p>
	<p>Use Release List Display Limit Disabled by default, this option will only display the last 100 entries in the PeerLock Locked Files and Released Files list. When disabled, the Locked Files and Released Files panels will contain as many entries as displayed in the selected PeerLock(s). For example, if PeerLock is limited to displaying up to 300 locked entries, the Locked Files list in the Peer Administrator will display all 300 entries, plus entries from any other PeerLocks, if selected.</p>
Reporting	<p>View Opens the latest Peer Administrator.TXT file that exists.</p> <p>Note: By default, the Peer Administrator report files get stored in the same directory where the Peer Administrator application file is located. To modify the default location, go to the Reporting dialog accessible from the Edit -> Settings menu.</p>
	<p>Delete Clears the content of the latest Peer Administrator.TXT file created.</p> <p>Note: By default, the Peer Administrator report files get stored in the same directory where the Peer Administrator application file is located. To modify the default location, go to the Reporting dialog accessible from the Edit -> Settings menu.</p>
	<p>Save Allows you to specify the name and location for your report file. The report file can also be saved in an MS Excel format by changing the extension from .txt to .xls.</p> <p>Note: By default, the Peer Administrator report files get stored in the same directory where the Peer Administrator application file is located. To modify the default location, go to the Reporting dialog accessible from the Edit -> Settings menu.</p>

	<p>menu.</p> <p>Append Appends the content of the current PeerSync Activity Table to the latest report file.</p> <p>Note: By default, the Peer Administrator report files get stored in the same directory where the Peer Administrator application file is located. To modify the default location, go to the Reporting dialog accessible from the Edit -> Settings menu.</p> <p>Create/Overwrite Creates a new report file with the latest Network Activity information in the directory specified. If the file already exists, the application will give you the option to either overwrite the file or append the current Network Activity information to it.</p> <p>Note: By default, the Peer Administrator report files get stored in the same directory where the Peer Administrator application file is located. To modify the default location, go to the Reporting dialog accessible from the Edit -> Settings menu.</p> <p>Save Content on Close By default this option is enabled. At the time you exit/close the application the Peer Administrator will store out the latest Network Activity information into the current report file. If no report file exists, you will then be able to create one.</p> <p>Note: By default, the Peer Administrator report files get stored in the same directory where the Peer Administrator application file is located. To modify the default location, go to the Reporting dialog accessible from the Edit -> Settings menu.</p>
Logging	<p>View The log file maintains a running summary of activities picked up by the Peer Administrator. This option opens the latest Peer Administrator.LOG file that exists.</p> <p>Note: By default, the Peer Administrator log files get stored in the same directory where the Peer Administrator application file is located. To modify the default location, go to the Reporting dialog accessible from the Edit -> Settings menu.</p> <p>Delete Clears the content of the Peer Administrator.LOG file.</p> <p>Note: By default, the Peer Administrator log files get stored in the same directory where the Peer Administrator application file is located. To modify the default location, go to the Reporting dialog accessible from the Edit -> Settings menu.</p> <p>Enable Logging By default this option is enabled. When this setting is enabled the Peer Administrator will store Profile activities in the Peer Administrator.LOG file.</p> <p>Note: By default, the Peer Administrator log files get stored in the same directory where the Peer Administrator application file is located. To modify the default location, go to the Reporting dialog accessible from the Edit -> Settings menu.</p>

	menu.
Auto Sort Table by Status Level	Enabled by default, this setting will sort all PeerSync™ and PeerLock™ table entries by the Status Level column. This setting applies to both PeerSync and PeerLock Activity Tables.
Show Admin Events	When selected it will display the Admin Events Panel at the bottom of the Peer Administrator interface. By default this table will show all errors that result due to administrative actions such as failing to copy a remote Profile locally for purposes of editing. Right-click on this table and uncheck the Show Failed Events Only option to display all messaging transactions between PeerSync™, PeerLock™, and the Peer Administrator.
Show Activity Panels	<p>Show PeerSync Shows or Hides the PeerSync Activity Panel. It can only be hidden when the PeerLock Activity Panel is visible. One of the two panels must be shown.</p>
	<p>Show PeerLock Shows or Hides the PeerLock Activity Panel. It can only be hidden when the PeerSync Activity Panel is visible. One of the two panels must be shown.</p>
	<p>Show Both (Default) Shows or Hides both the PeerSync Activity Panel and the PeerLock Activity Panel.</p>
Show Color Legend Panel	Displays the Color Legend Panel below the PeerSync or PeerLock Activity Tables. This setting is enabled by default.

Help Menu

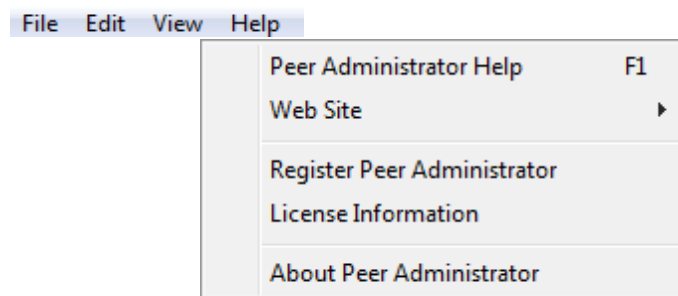

Help Menu	
Peer Administrator Help F1	Opens the default Help Content. This requires that the Help Manual is located in the Peer Administrator's installation directory.
Web Site	Our Home Page Link to the Peer Administrator home page at www.peersoftware.com which provides quick and easy access to our product information,

	Online Support Provides access to product Knowledge Base pages, Online Forum, Support team contact, and product updates.
	Latest News Link to the News page for a listing of press releases, white papers ,and success stories referencing Peer Software products.
	Contact Us Companies address, phone number, and e-mail. You may also complete and submit a request through the form available on this page.
Register Peer Administrator	Opens the Registration window. A product Key is issued at the time of purchase and is required in order to fully register the product. Otherwise the Peer Administrator will run for a trial period before it becomes non-functional.
License Information	Opens the Product Editions and Licensing dialog. This window shows the current packages, options, and functionalities the Peer Administrator is registered to use.
About Peer Administrator	The About window displays the product details such as the version number, build date, registration information, and company contact details.

PeerSync Activity Panel

PeerSync Activity Panel

PeerSync Computer	Group	Current Status	Activity	Checked	Updated	Added	Deleted	Message
COMP1	HQ Configuration	Idle - Real-time Mo...	Monitoring (Folder ...	21	0	0	0	0
COMP2	Autodesk Proje...	Idle - Real-time Mo...	Monitoring (Folder ...	36	1	6	0	0

PeerSync Activity Table Columns

The Activity Table displays PeerSync™ Profile activities in tabular format. This is the primary visual feedback display for all connected and running PeerSyncs™ on your network. Through this display you can expand detailed information about one or more connections and have some limited control over the connected and running PeerSyncs™ around your network. Below is a description of each column represented in the PeerSync Activity Table.

PeerSync Computer	Lists the name of the computer on which a specific Profile is running. When (SVC) is displayed at the end of the computer name, it signifies that the Profile is running as a Service. When (NP) is displayed at the end of the computer name, it signifies that the Profile is running in a Non Persistent mode. This means that PeerSync™ will terminate once it completes
-------------------	--

	its Job(s). This notation tells you that PeerSync™ terminated expectedly.										
Group	Displays the Name or Group Name of the Profile (.snc) currently running on a computer. By default, the Peer Administrator uses the name of the running Profile. You can specify a Group Name for your Profile by adding /GOC:group to the list of command line arguments in PeerSync™ (see the /GO option in the PeerSync™ Help Manual).										
Current Status	Shows the status of each running Profile. <table> <tr> <td>Not Connected</td><td>Displayed when PeerSync™ is running but not transmitting status information to the Peer Administrator. In PeerSync™ versions older than 7.3.2 this has to be enabled manually from the PeerSync™ Profiler.</td></tr> <tr> <td>Processing Selected Jobs</td><td>Generally shown for Non Persistent (NP) Profiles.</td></tr> <tr> <td>Job/ Copy Threads</td><td>Shown for persistent Jobs running multiple threads.</td></tr> <tr> <td>Daily Timer w/ RT</td><td>Shown for persistent Jobs running in a schedule and real-time mode.</td></tr> <tr> <td>Finished</td><td>Specific Profile terminated after successfully completing its Job(s).</td></tr> </table>	Not Connected	Displayed when PeerSync™ is running but not transmitting status information to the Peer Administrator. In PeerSync™ versions older than 7.3.2 this has to be enabled manually from the PeerSync™ Profiler.	Processing Selected Jobs	Generally shown for Non Persistent (NP) Profiles.	Job/ Copy Threads	Shown for persistent Jobs running multiple threads.	Daily Timer w/ RT	Shown for persistent Jobs running in a schedule and real-time mode.	Finished	Specific Profile terminated after successfully completing its Job(s).
Not Connected	Displayed when PeerSync™ is running but not transmitting status information to the Peer Administrator. In PeerSync™ versions older than 7.3.2 this has to be enabled manually from the PeerSync™ Profiler.										
Processing Selected Jobs	Generally shown for Non Persistent (NP) Profiles.										
Job/ Copy Threads	Shown for persistent Jobs running multiple threads.										
Daily Timer w/ RT	Shown for persistent Jobs running in a schedule and real-time mode.										
Finished	Specific Profile terminated after successfully completing its Job(s).										
Activity	Shows the activity of each Profile running. <table> <tr> <td>Monitoring (Persistent)</td><td>Displayed for persistent Profiles such as Profiles running in real-time, on schedule, interval, or as a Service.</td></tr> <tr> <td>Running</td><td>Usually shown for Non Persistent (NP) Profiles.</td></tr> <tr> <td>Closed by Operator or System Shutdown</td><td>Displayed once all Jobs in a Non Persistent Profile completed and the application was closed or when a Service was manually stoped.</td></tr> <tr> <td>Closed Normally</td><td>Displayed when all Jobs in a Non Persistent Profile completed.</td></tr> </table>	Monitoring (Persistent)	Displayed for persistent Profiles such as Profiles running in real-time, on schedule, interval, or as a Service.	Running	Usually shown for Non Persistent (NP) Profiles.	Closed by Operator or System Shutdown	Displayed once all Jobs in a Non Persistent Profile completed and the application was closed or when a Service was manually stoped.	Closed Normally	Displayed when all Jobs in a Non Persistent Profile completed.		
Monitoring (Persistent)	Displayed for persistent Profiles such as Profiles running in real-time, on schedule, interval, or as a Service.										
Running	Usually shown for Non Persistent (NP) Profiles.										
Closed by Operator or System Shutdown	Displayed once all Jobs in a Non Persistent Profile completed and the application was closed or when a Service was manually stoped.										
Closed Normally	Displayed when all Jobs in a Non Persistent Profile completed.										
Checked	This indicator displays the total number of source files/folders that have been validated for all Profile Jobs.										
Updated	Indicates the number of Target Files that were updated during synchronization of all Profile Jobs.										
Added	Indicates the number of new files added to the Target Folders during the synchronization of all Profile Jobs.										
Deleted	Indicates the number of files deleted (or moved) during synchronization of all Profile Jobs.										
Messages	Indicates the number of error messages generated during Profile processing.										
Time	Indicates the amount of time that has elapsed since the current										

	Profile was launched.
Total Bytes Copied	Indicates the total number of bytes successfully transmitted to the Target Folder(s) during the synchronization of all Profile Jobs.
User	Indicates the user name under which the PeerSync™ Service or application is running.
Version	Represents the version of PeerSync™ running under this Profile. PeerSync™ versions older than 7.3.2 will be displayed as UNKNOWN.
Send Frequency	Frequency in seconds by which PeerSync™ transmits status information to the Peer Administrator. By default the Send Frequency is set to 3 seconds in PeerSync™. To modify the Send Frequency for a specific PeerSync™ Profile, right-click on the entry from the PeerSync Activity Panel , select "Set Transmit Frequency" from the PeerSync Activity Pop-Up menu and specify the desired frequency. Alternatively, you may add /GOF: x to the PeerSync™ list of command line arguments, where x represents the second frequency interval.
Domain	<p>The name of the Domain on which the Profile is running. If PeerSync™ and the Peer Administrator are running on two separate domains on the same network a trust must exist between the domains in order for the applications to be able to see and communicate with each other.</p> <p>Note: The Domain name will only be displayed for PeerSync™ versions 7.3.2 or higher.</p>
Cycles	<p>By default, this column is hidden and is only viewable in the PeerSync Activity Panel. To enable, right-click on the PeerSync Activity Panel and choose "Selected Columns..."</p> <p>The Cycle interval tells the Peer Administrator when to check the activity and status of the items listed in the PeerSync and PeerLock Activity Panels. After each Cycle the Peer Administrator will update the color display of the items accordingly.</p> <p>The Cycle is determined internally by the number of seconds before displaying the "Pending" and "Failed" colors. These options can be set in the General Settings window. The Peer Administrator determines the greatest common denominator between these two values as the Cycle. If the common denominator equals the "Pending" value, the next common denominator of the "Pending" and "Failed" settings is used.</p> <p>Note: The Cycle value is used by the Peer Administrator to check the status of both PeerSync and PeerLock activities.</p>
Status Level	Column that represents the status level of each PeerSync™ entry (-1 to 5).


	0 = Finished, 1 = Receiving, 2 = Paused, 3 = Pending, 4 = Failed-Idle, 5 = Failed, -1 = Disabled/Unknown
Profile Date Modified	Column that represents the date and time when the current Profile was updated.
Pending Scans	Column that represents the number of scans that have not been able to run because of lack of Job Threads.
Pending Events	Column that represents the number of pending events that have been queue but are still waiting to be processed.
Pending Retries	Column that represents the number of files waiting in the list to be retried.
Pending Managed Files	Column that represents the number of files that are waiting to be processed using the Embedded Open File Manager (EOFM) or VSS based on the Managed Files interval.
Failed Scans	Column that represents the number of scans that have interrupted or were not able to run because of lack of Job Threads or connectivity issues and the Retry failed connection every x minutes option is disabled. The text color will change to red for items in the PeerSync Activity Panel when the Failed Scans counter is greater than zero. See the Reprocess Failed Scans option.
Failed Files	Column that represents the number of files that have failed to be replicated/synchronized possibly due to Retries being turned off or exceeded. The text color will change to red for items in the PeerSync Activity Panel when the Failed Files counter is greater than zero. See the Reprocess Failed Files option.
Job Count	Column represents the total number of Jobs running in the current Profile.
Detected Events	Column that represents the number of events that have been detected but have not been analyzed and entered in a queue yet.

Notes:

1. If the "Auto Sort Tables by Status Level" option is selected from the [View](#) menu, non-responding Profiles will be shown at the top of the [Activity Table](#) while inactive Profiles are pushed to the bottom. All other activities will be shown in the order they are received. The color of each row represents the connection status and can be set in the [Settings](#) window accessible from the [Edit](#) menu or by simply clicking on the [Color Legend Panel](#) at the bottom of the Peer Administrator.
2. Turning off the "Auto Sort Tables by Status Level" option from the [View](#) menu will allow you to sort the table by any column simply by clicking on the column header.
3. The columns displayed on this panel can be shown/ hidden by choosing "Select Columns..." from the [PeerSync Activity Pop-Up Menu](#).
4. You can re-arrange the table columns by clicking and dragging the desired column to another location. The size and positions of the columns will be retained in the PSOBSDEF.CFG configuration file.

5. By double clicking on a selected row you will open the [Status Display](#) of the running PeerSync™ Profile. See [Connect to Status Display](#) below for more information.
6. To refresh all active PeerSync™ entries hit F5 on the keyboard once the [PeerSync Activity Panel](#) is in focus.

PeerSync Activity Pop-Up Menu

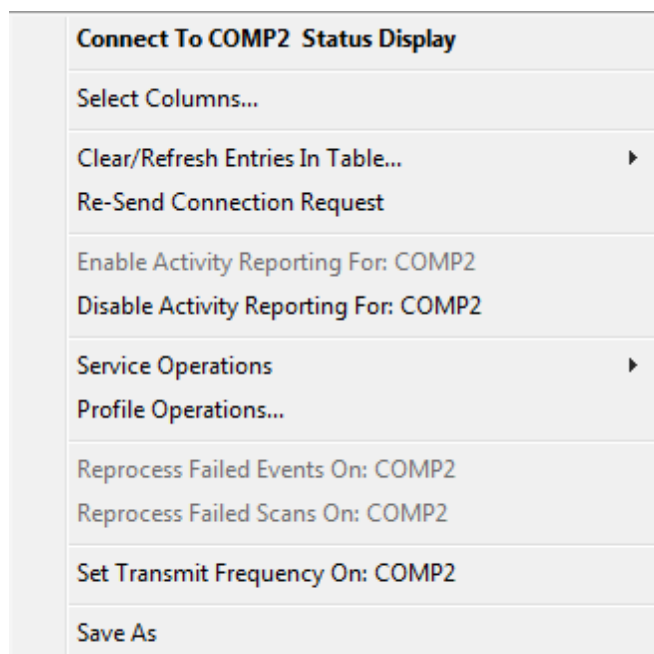

Activity Pop-Up Menu Items	
By right clicking on the PeerSync Activity Table , you will display the PeerSync Activity Pop-Up Menu .	
Connect To Computer Status Display	Opens the Status Display window of the selected running PeerSync™ Profile. You may open a maximum of four (4) Status Display widows. Each one will retain its size and position, although subsequent launches of a given Profile will not necessarily utilize the same window. To open another Profile, simply close one of the open Status Displays and the new window will open in its place. Only a single instance of the Status Display window can be opened per Profile. Furthermore, each window can be specified to Stay on Top of the Peer Administrator application from the Options menu in each individual window. This menu item is not available for PeerSync Profiles that are running TCP Jobs.
Select Columns...	Displays a dialog from which you can choose to show/hide specific PeerSync Activity Panel columns. You can hide/show the entire PeerSync Activity Panel by disabling /enabling the "Display PeerSync Activity" item within the View menu. At least one column must be shown in the PeerSync Activity Panel .

Clear/Refresh Entries In Table...	<p>Selected Available only if an entry is selected from the PeerSync Activity Table. This setting refreshes the selected row. If all the Jobs in a Non Persistent (NP) Profile are completed or the selected Profile was terminated or 'Failed', the table entry for that Profile will be cleared.</p>
	<p>Active Refreshes all connections that are active (receiving or paused) within this table or current tab/group (if the Use Tab Group option is enabled).</p>
	<p>Passive Refreshes all passive connections. Completed, terminated, or failed Profiles will be cleared from the Activity Table or current tab/group (if the Use Tab Group option is enabled).</p>
	<p>All Refreshes the PeerSync Activity Table to display new Profiles running and clearing completed, failed, or terminated sessions.</p>
Re-Send Connection Request	<p>Broadcasts message to all Profiles running within the designated domain to begin transmitting status information to the Peer Administrator. This menu item is not available for PeerSync Profiles that are running TCP Jobs.</p>
Enable Activity Reporting For: Computer	<p>Selecting this option tells PeerSync™ and PeerLock™ residing on the computer of this selection to begin sending status information to the Peer Administrator. This option is only available on the right-click of an item on the PeerSync Activity Panel, however, it also affects/apply's to PeerLock™ entries residing on the same computer as the PeerSync™ item that received the "Enable" command. This menu item is not available for PeerSync Profiles that are running TCP Jobs.</p>
Disable Activity Reporting For: Computer	<p>This option tells PeerSync™ and PeerLock™ residing on the computer of this selection to stop sending status information to the Peer Administrator. This option is only available on the right-click of an item on the PeerSync Activity Panel, however it also affects/apply's to PeerLock™ entries residing on the same computer as the PeerSync item that received the "Disable" command. If the Always Enable Activity Reporting setting is enabled, selecting this option will disable it so that the Enable Activity Reporting becomes available.</p> <p>When activity has been "Disabled" for PeerSync™ and PeerLock™, the PeerSync™ and PeerLock™ entries affected would change their status to 'Disabled' followed by the reason why the Peer Administrator stopped receiving the activity. Only minimal information would be retained in the Activity Panels for the 'Disabled' connections. This menu item is not available for PeerSync Profiles that are running TCP Jobs.</p>
Service Operations	<p>Start PeerSync On</p>

	<p>This option is available only when using the PeerSync Administrator Enterprise Package and for items for which the service has been installed and is stopped. Clicking on this option will start the PeerSync Service for the selected item (assumes the service has been installed and properly configured on the target computer).</p> <p>Stop PeerSync On This option is available only when using the PeerSync Administrator Enterprise Package and if the selected item is running as a service. By selecting this option the Peer Administrator will terminate the PeerSync™ Service running on the selected device.</p> <p>Pause PeerSync On This option is available only when using the PeerSync Administrator Enterprise Package and if the selected item is running as a service. By selecting this option the Peer Administrator will pause the PeerSync™ Service running on the selected device.</p> <p>Resume PeerSync On This option is available only when using the PeerSync Administrator Enterprise Package and for items for which the service is paused. By selecting this option the Peer Administrator will resume the paused PeerSync™ Service running on the selected device.</p> <p>Select Computer to Start PeerSync Service... This option is available only when using the PeerSync Administrator Enterprise Package. When selected, a Remote Service Start dialog will be displayed where you may select/enter the name of the computer on which to start the PeerSync™ Service (assumes the service has been installed and properly configured on the target computer).</p>
Profile Operations...	This option is only available with the PeerSync Administrator Enterprise Package . Selecting this option will open the Profile Operations dialog which supports functionalities such as Stopping, Starting, Pausing PeerSync™ services and editing/submitting Profile changes.
Reprocess Failed Events On: Computer	This option is only available with the PeerSync Administrator Enterprise Package . Sends a command to PeerSync™ to re-process any events/files that failed to be processed without restarting PeerSync™.
Process Failed Scans On: Computer	This option is only available with the PeerSync Administrator Enterprise Package . Sends a command to PeerSync™ to re-process any scans that failed to run/complete without restarting PeerSync™.
Set Transmit Frequency On: Computer	Enabled only if an item is selected on the PeerSync Activity Panel . Frequency represents, in seconds, the interval by which PeerSync™ transmits status information to the Peer

	<p>Administrator. Selecting this option will open a dialog by which you may specify a desired frequency for a specific PeerSync™ Profile. By default, PeerSync™ sends status information to the Peer Administrator every 3 seconds. This menu item is not available for PeerSync Profiles that are running TCP Jobs.</p> <p>Note: For accurate status display set the Set Transmit Frequency interval to be smaller then the "Number of Cycles Before Displaying Pending Color" interval used.</p>
--	--

* Notes:

1. Option available for PeerSync versions 7.3.2 or higher.
2. Some menu items are not available for PeerSync Profiles that are running TCP Jobs.

PeerLock Activity Panel

PeerLock Status

PeerLock Status - Current Selection: All Computers							
PeerLock Status: 1 of 1		Locked Files: 5		Released Files: 4			
PeerLock Computer	Group	Current Status	Locks	Releases	Lock Average	Activity	Messages
COMP2	Autod...	Normal	9 (5 Active)	4	0.00 per min	Checkin...	14

PeerLock Status Columns

This panel contains all information captured about the PeerLock™ instances running on the network.

PeerLock Computer	Lists the name of the computer on which a specific PeerLock is running. When (SVC) is displayed at the end of the computer name, it signifies that PeerLock is running as a Service.							
Group	When PeerLock is associated with a PeerSync Profile, the Group name will be the Group name of the Profile. If PeerLock is not associated with a PeerSync Profile, the Group will be set to None.							
Current Status	<div>Displays the status for the specific PeerLock instance. Non Normal statuses usually indicate a possible connection issue. The font for such entries will turn red. Possible statuses:</div> <table><tr><td>Normal</td><td>Running without connection issues</td></tr><tr><td>Normal (Stopped @ DATE TIME)</td><td>%PRODUCT2% shows a stopped status.</td></tr><tr><td>Connecting to</td><td>Establishing connection to the source folder</td></tr></table>		Normal	Running without connection issues	Normal (Stopped @ DATE TIME)	%PRODUCT2% shows a stopped status.	Connecting to	Establishing connection to the source folder
Normal	Running without connection issues							
Normal (Stopped @ DATE TIME)	%PRODUCT2% shows a stopped status.							
Connecting to	Establishing connection to the source folder							

	<div>Source Folder: . . .</div> <div>Connecting to Target Folder: . . .</div> <div>There is 1 Failed Connection: Path</div> <div>There are 3 Failed Connections.</div> <div>Retrying Connection - Ping</div> <div>Establishing connection to the target folder</div> <div>Unable to connect to the specified path</div> <div>Unable to connect to more than one path</div> <div>Retrying a connection failure</div>
Activity	<p>The activity level of the specific PeerLock instance.</p> <div> <div>Running</div> <div>Default running mode</div> </div> <div> <div>Checking Locks</div> <div>Scanning the Windows Open Files list to determine if any files need to be locked. By default this is done every 1 second.</div> </div> <div> <div>Checking Releases</div> <div>Scanning the Windows Open Files list to determine if any files need to be released. By default this is done every 3 seconds.</div> </div> <div> <div>Caching Lists</div> <div>Writing locked files to the cache list for easy cleanup during restarts and is also used by the PeerLock Read-Only Display, and the PeerSync Profile. The cache list gets written after checking the releases.</div> </div> <div> <div>Checking Failed Connections</div> <div>Independent thread which checks the connection status of all systems.</div> </div> <div> <div>Checking Failed Locks</div> <div>On a lock cycle PeerLock checks an internal list of failed locks and retries them</div> </div>
Locks	Shows the cumulative number of locks generated by the specific PeerLock instance followed by the number of active locks.
Releases	The total number of locks that were released by the specific PeerLock instance.
Lock Average	The average number of locks generated per minute by the specific PeerLock instance.
Release Average	The average number of locks that were released per minute by the specific PeerLock instance.
Failed Locks	Total number of locks that failed to be set by the specific PeerLock instance.
Time	The duration of time that the specific PeerLock instance has been running.
User	Indicates the user name under which the specific PeerLock instance has been running.
Version	The version number of the specific PeerLock instance that has been running.
Send Freq	Represents, in seconds, the interval by which PeerLock transmits status information to the Peer Administrator.

Domain	The name of the Domain on which the specific PeerLock instance has been running. If PeerLock and the Peer Administrator are running on two separate domains on the same network a trust must exist between the domains in order for the applications to be able to see and communicate with each other.
Status Level	<p>Column that represents the status level of each PeerLock™ entry. 0 = Released, 1 = Receiving/Locked, 3 = Pending, 5 = Not Responding (Status Levels -1, 2, and 4 apply to PeerSync™ entries only)</p> <p>PeerLock™ status entries will change if the Peer Administrator has not received new updates from PeerLock™ for the period set by the Activity Monitoring Options.</p>
Job Count	The total number of Jobs that are configured for this specific PeerLock instance.
Messages	The total number of messages that occurred for this specific PeerLock instance.
Cycles	<p>By default, this column is hidden and is only viewable in the PeerLock Status panel. To enable, right-click on the PeerLock Status panel and choose "Selected Columns..."</p> <p>The Cycle interval tells the Peer Administrator when to check the activity and status of the items listed in the PeerLock and PeerSync panels. After each Cycle the Peer Administrator will update the color display of the items accordingly.</p> <p>The Cycle is determined internally by the number of seconds before displaying the "Pending" and "Failed" colors. These options can be set in the General Settings window. The Peer Administrator determines the greatest common denominator between these two values as the Cycle. If the common denominator equals the "Pending" value, the next common denominator of the "Pending" and "Failed" settings is used.</p> <p>Note: The Cycle value is used by the Peer Administrator to check the status of both PeerSync and PeerLock activities.</p>
Log File Path	<p>By default, this column is hidden and is only viewable in the PeerLock Status panel. To enable, right-click on the PeerLock Status panel and choose "Selected Columns..."</p> <p>The Log File Path column shows the location of the log file for this specific PeerLock instance.</p>
System Uptime	<p>By default, this column is hidden and is only viewable in the PeerLock Status panel. To enable, right-click on the PeerLock Status panel and choose "Selected Columns..."</p> <p>The System Uptime column shows the total uptime time of the</p>

system on which PeerLock has been running.

Locked List

Displaying Locked Files For: All Computers - Last Refresh: 2/20/2013 5:21:46 PM Refresh Locked Files

PeerLock Status: 1 of 1 Locked Files: 5 Released Files: 4

PeerLock Computer	Current Status	Target File Path	Locked	Duration	Accessed By	Target Access
COMP2	Locked	\\dellt1500\d\$\...	2/20/2013 7:5...	09:22:13	MonikaC	Read
COMP2	Locked	\\dellt1500\d\$\...	2/20/2013 7:5...	09:22:13	MonikaC	Read
COMP2	Locked	\\dellt1500\d\$\...	2/20/2013 7:5...	09:22:12	MonikaC	Read
COMP2	Locked	\\dellt1500\d\$\...	2/20/2013 7:5...	09:22:12	MonikaC	Read
COMP2	Locked	\\dellt1500\d\$\...	2/20/2013 7:5...	09:22:11	MonikaC	Read

Locked Files Columns

This panel contains all information captured about the source and target files that have been locked by PeerLock™ instances running on the network.

PeerLock Computer	The name of the computer on which PeerLock™ is running and locking corresponding target files. When (SVC) is displayed at the end of the computer name, it signifies that PeerLock is running as a Service.
Current Status	Displays 'Locked' as the status for all entries in the Locked Files panel.
Target File Path	Shows the file name complete with folder path for a target file that is locked, if the file exists and can be locked.
Locked	Display the date/time when the target file was locked.
Duration	Displays the amount of time that the source file has been opened.
Accessed By	The name of the user who has opened the file or accessed the resource.
Target Access Allowed	Displays the permissions that are allowed on the opened target file which are applied by PeerLock™.
Source File Path	Displays the file name complete with folder path for the source file that has been detected as an open file.
Version	Represents the version of PeerLock™.
Send Freq	Frequency represents, in seconds, the interval by which PeerLock™ transmits status information to the Peer Administrator. Selecting this option will open a dialog by which you may specify a desired frequency for a specific PeerLock™.
Status Level	Column that represents the status level of each PeerLock™ entry. 0 = Released, 1 = Receiving/Locked, 3 = Pending, 5 = Not Responding (Status Levels -1, 2, and 4 apply to PeerSync™)

	<p>entries only)</p> <p>PeerLock™ status entries will change if the Peer Administrator has not received new updates from PeerLock™ for the period set by the Activity Monitoring Options.</p>
Last Updated	Date and time the Locked Files list was last updated by PeerLock. The Locked Files list only gets updated when you click the Locked Files list tab from another tab (changing tabs), or by clicking on the Refresh Released Files link above the list at the right. Hitting F5 or F6 will also force an update of this list.
Job Number	Lists the Job number that the specific lock is associated with.
#Locks	Not shown by default. Displays the number of locks on the source.
Application	Not shown by default. Displays the application that has been detected as opening the source file.
Detection Type	Not shown by default. This column represents the PeerLock™ detection mode used to detect what source files are locked/opened. This will either be File Server Mode Detection or Local Detection.
Idle Time	Not shown by default. Shows the amount of time the target file will remain locked once the source file has been released. When the source file is closed, PeerLock™ will wait the number of Idle Time seconds specified before releasing the target file. During the Idle Time period the file entry in the Locked list will be highlighted Yellow. The Idle Time value can be set in the Release Options dialog. This feature is intended to protect the releasing of files during file opens and saves. Certain applications may temporary release files during these procedures. With this feature enabled, PeerLock™ will wait the set period of time to make sure the file is fully released before unlocking the corresponding target files.
Lock File Handle	Not shown by default. Displays the handle value created that is being used to lock the temporary Lock File created by PeerLock™ to interact with other <%COMPANY% Products. If the Interact features are disabled, then this will display 'None'.
Release Detected	Not shown by default. Shows the date and time when PeerLock™ detected the source file was closed. This value will be cleared if the file is reopened within the Idle period and the target file handle is not released.
Source Access Allowed	Not shown by default. Displays the permissions that are allowed on the opened source file.
Source Attributes	Not shown by default. Shows the attributes of the source file.
Source Handle	Not shown by default. Displays the handle value created when the source file was opened.
Source Modified	Not shown by default. Shows the modified date/time of the

	source file when it was detected as being open.
Source Open Mode	Not shown by default. Displays the permissions that were used to open the source file.
Target Handle	Not shown by default. Display the handle value created that is being used to lock the target file by PeerLock™.
Target Open Mode	Not shown by default. Displays the permissions that were granted when the target file was locked by PeerLock™.
Temporary Releases	Not shown by default. Shows the number of times the source file was closed, but the corresponding target file was not released. This would most likely occur when using the Idle period setting in PeerLock™.

Notes:

1. The PeerLock™ Activity Panel can be shown/ hidden from the [View](#) -> Show PeerLock™ Activity Panel menu item. Either the PeerSync™ or PeerLock™ Activity Panels must be shown. Both Panels may not be disabled at the same time.
2. The columns displayed on this panel can be shown/ hidden by choosing "Select Columns..." from the [Locked List Popup Menu](#).
3. You may resize, sort, and reposition the columns simply by dragging them to a desired position. The size and positions of the columns will be retained in the PSOBSEDEF.CFG configuration file.
4. The default columns are Computer, Status, Target File Path, Locked, Duration, Accessed By, Target Access Allowed, Source File Path, Version, and Send Frequency.
5. To refresh all active PeerLock™ entries hit F5 on the keyboard once the [PeerLock Activity Panel](#) is in focus.
6. Unless you manually enables or disables the [PeerLock Activity Panel](#) from the [View](#) menu, the Peer Administrator will try to determine if PeerLock™ has been installed on the local machine or if is running on the network, to analyze whether it needs to automatically show the [PeerLock Activity Panel](#).

Released List

Displaying Released Files For: All Computers - Last Refresh: 2/20/2013 5:25:22 PM							Refresh Released Files
PeerLock Status: 1 of 1 Locked Files: 5 Released Files: 4							
PeerLock Computer	Current Status	Target File Path	Released	Duration	Accessed By	Target Access ...	
COMP2	Released	\\dellt1500\d\$\...	2/19/2013 12:...	00:00:52	MonikaC	Read	
COMP2	Released	\\dellt1500\d\$\...	2/19/2013 12:...	00:00:04	MonikaC	Read	
COMP2	Released	\\dellt1500\d\$\...	2/19/2013 12:...	00:00:03	MonikaC	Read	
COMP2	Released	\\dellt1500\d\$\...	2/19/2013 12:...	00:00:30	MonikaC	Read	

Released List Columns

This panel displays a list of the top 100 recently released files by PeerLock™ instances running on the network and all information pertaining to the locking and releasing of those files including why the file was released (i.e. Manually, Locking Stopped, PeerLock™ Stopped or the Source File was released).

PeerLock™ Computer	The name of the computer on which PeerLock™ is running and locking corresponding target files.
Current Status	Displays 'Released' as the status for all entries in the Released Files panel.
Target File Path	Shows the file name complete with folder path for a target file that is locked, if the file exists and can be locked.
Released	Displays the date and time when the locked file was released.
Duration	Displays the amount of time that the source file has been opened.
Accessed By	The name of the user who has opened the file or accessed the resource.
Target Access Allowed	Displays the permissions that are allowed on the opened target file which are applied by PeerLock™.
Source File Path	Displays the file name complete with folder path for the source file that has been detected as an open file.
Version	Represents the version of PeerLock™.
Send Freq	Frequency represents, in seconds, the interval by which PeerLock™ transmits status information to the Peer Administrator. Selecting this option will open a dialog by which you may specify a desired frequency for a specific PeerLock™.
Status Level	<p>Column that represents the status level of each PeerLock™ entry. 0 = Released, 1 = Receiving, 3 = Pending, 5 = Not Responding (Status Levels -1, 2, and 4 apply to PeerSync™ entries only).</p> <p>PeerLock™ status entries will change if the Peer Administrator has not received new updates from PeerLock™ for the period set by the Activity Monitoring Options.</p>
Last Updated	Date and time the Locked Files list was last updated by PeerLock. The Locked Files list only gets updated when you click the Locked Files list tab from another tab (changing tabs), or by clicking on the Refresh Released Files link above the list at the right. Hitting F5 or F6 will also force an update of this list.
Job Number	Lists the Job number that the specific lock release was associated with.
#Locks	Not shown by default. Displays the number of locks on the source.
Application	Not shown by default. Displays the application that has been detected as opening the source file.
Detection Type	Not shown by default. This column represents the PeerLock™ detection mode used to detect what source files are locked/opened. This will either be File Server Mode Detection or


	Local Detection.
Idle Time	Not shown by default. Shows the amount of time the target file will remain locked once the source file has been released. When the source file is closed, PeerLock™ will wait the number of Idle Time seconds specified before releasing the target file. During the Idle Time period the file entry in the Locked list will be highlighted Yellow. The Idle Time value can be set in the Release Options dialog. This feature is intended to protect the releasing of files during file opens and saves. Certain applications may temporary release files during these procedures. With this feature enabled, PeerLock™ will wait the set period of time to make sure the file is fully released before unlocking the corresponding target files.
Lock File Handle	Not shown by default. Displays the handle value created that is being used to lock the temporary Lock File created by PeerLock™ to Interact with other <%COMPANY%™ Products. If the Interact features are disabled then this will display 'None'.
Release Detected	Not shown by default. Shows the date and time when PeerLock™ detected the source file was closed. This value will be cleared if the file is reopened within the Idle period and the target file handle is not released.
Source Access Allowed	Not shown by default. Displays the permissions that are allowed on the opened source file.
Source Attributes	Not shown by default. Shows the attributes of the source file.
Source Handle	Not shown by default. Displays the handle value created when the source file was opened.
Source Modified	Not shown by default. Shows the modified date/time of the source file when it was detected as being open.
Source Open Mode	Not shown by default. Displays the permissions that were used to open the source file.
Target Handle	Not shown by default. Display the handle value created that is being used to lock the target file by PeerLock™.
Target Open Mode	Not shown by default. Displays the permissions that were granted when the target file was locked by PeerLock™.
Temporary Releases	Not shown by default. Shows the number of times the source file was closed, but the corresponding target file was not released. This would most likely occur when using the Idle period setting in PeerLock™.

Notes:

1. The [PeerLock Activity Panel](#) can be shown/ hidden from the [View](#) -> "Show PeerLock Activity Panel" menu item. Either the PeerSync™ or PeerLock Activity Panels must be shown. Both Panels may not be disabled at the same time.

2. The columns displayed on this panel can be shown/hidden by choosing "Select Columns..." from the [Released List Popup Menu](#).
3. You may resize, sort, and reposition the columns simply by dragging them to a desired position. The size and positions of the columns will be retained in the PSOBSEDEF.CFG configuration file.
4. The default columns are Computer, Status, Target File Path, Locked, Duration, Accessed By, Target Access Allowed, Source File Path, Version, and Send Frequency.
5. Unless you manually enable or disable the [PeerLock Activity Panel](#) from the [View](#) menu, the Peer Administrator will try to determine if PeerLock™ has been installed on the local machine or if is running on the network, to analyze whether it needs to automatically show the [PeerLock Activity Panel](#).


Status Popup Menu

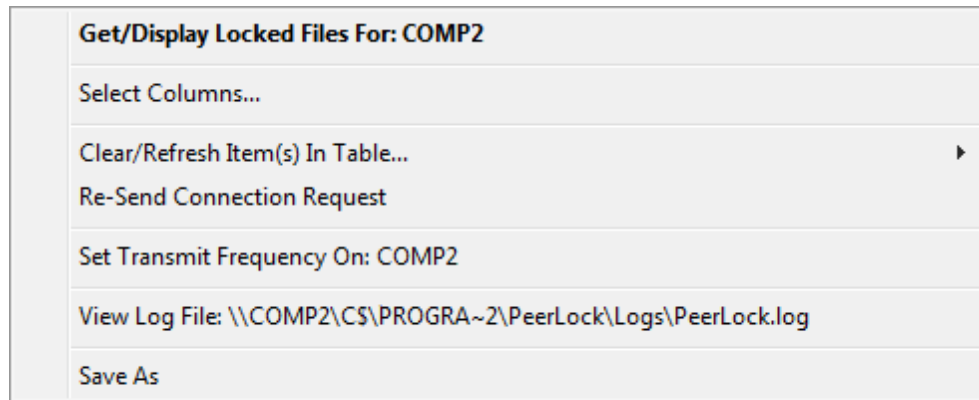

Lock/Released List Popup Menu	
Display the Lock/Release List Popup Menu by right-clicking on the Locked or Released panels.	
Get/Display Locked Files For: Computer	Changes focus to the PeerLocks Locked files list.
Select Columns...	Displays a dialog from which you may choose to show/hide specific Locked or Released columns. At a minimum, one column must be shown at all times.
Clear Refresh Item(s) in Table...	Selected F5 Available only if an entry is selected from the Locked or Released panels. This setting refreshes the selected row. If the selected lock becomes released, the entry will be cleared from the Locked list and added to the Released list.
	Clear/Refresh All F6 Refreshes the Locked or Released tables to display new locks and clearing/adding released locks.
Re-Send Connection Request	Broadcasts a message to all PeerLocks™ running within the designated domain to begin transmitting status information to the Peer Administrator.

Set Transmit Frequency On: Computer	<p>Enabled only if an item is selected from the table. Frequency represents, in seconds, the interval by which PeerLock™ transmits status information to the Peer Administrator. Selecting this option will open a dialog by which you may specify a desired frequency for the specific PeerLock™ running on the selected computer entry. By default, PeerLock™ sends status information to the Peer Administrator every 3 seconds.</p> <p>Note: For accurate status display, set the Set Transmit Frequency interval to be smaller than the "Number of Cycles Before Displaying Pending Color" interval used.</p>
View Log File: Log	Opens the log file of the remote PeerLocks instance.
Save As	Saves the content of the current panel into a CSV file format.

Locked/Released List Popup Menu

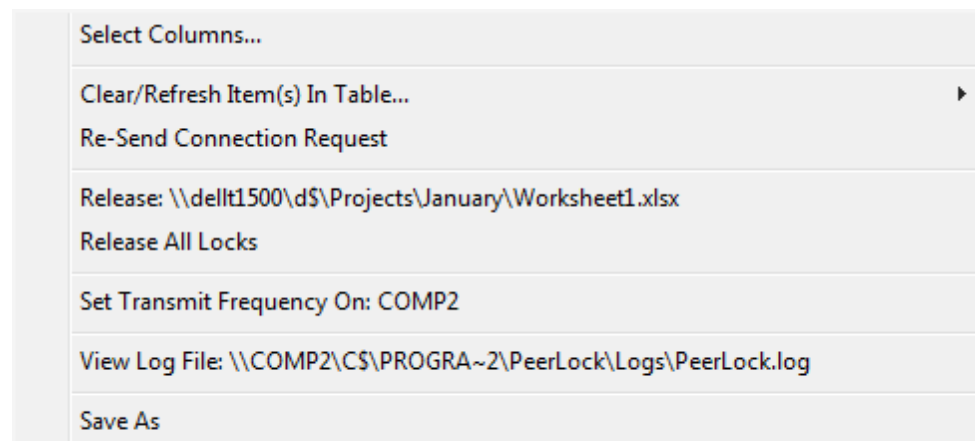


Lock/Released List Popup Menu	
Display the Lock/Release List Popup Menu by right-clicking on the Locked or Released panels.	
Select Columns...	Displays a dialog from which you may choose to show/hide specific Locked or Released columns. At a minimum, one column must be shown at all times.
Clear Refresh Item(s) in Table...	<p>Selected F5</p> <p>Available only if an entry is selected from the Locked or Released panels. This setting refreshes the selected row. If the selected lock becomes released, the entry will be cleared from the Locked list and added to the Released list.</p>
	<p>Clear/Refresh All F6</p> <p>Refreshes the Locked or Released tables to display new locks and clearing/adding released locks.</p>

Re-Send Connection Request	Broadcasts a message to all PeerLocks™ running within the designated domain to begin transmitting status information to the Peer Administrator.
Release: File	Visible only on the Released panel. When selected, the Peer Administrator will send a command to PeerLock™ to release the lock handle of the selected target file. When using this option the target file will not enter the Idle period before being released. The the target file may be temporarily released. During the next Lock Cycle/Frequency/Interval PeerLock may detect that the source file is opened, and will re-lock the target file. Once an item is released it will be added to the Released Files table.
Release All Locks *	Visible only on the Released panel. PeerLock will release the lock handles of all the files currently locked on the target folders. When using this option the target files will not enter the Idle period before being released. The the target files may be temporarily released. During the next Lock Cycle/Frequency/Interval PeerLock may detect that the source files are opened, and will re-lock the target files. Once an item is released it will be added to the Released Files table.
Set Transmit Frequency On: Computer	Enabled only if an item is selected from the table. Frequency represents, in seconds, the interval by which PeerLock™ transmits status information to the Peer Administrator. Selecting this option will open a dialog by which you may specify a desired frequency for the specific PeerLock™ running on the selected computer entry. By default, PeerLock™ sends status information to the Peer Administrator every 3 seconds. Note: For accurate status display, set the Set Transmit Frequency interval to be smaller then the " Number of Cycles Before Displaying Pending Color " interval used.
View Log File: File	Opens the log file of the remote PeerLocks instance.
Save As	Saves the content of the current panel into a CSV file format.

Admin Events Panel

Admin Events Panel

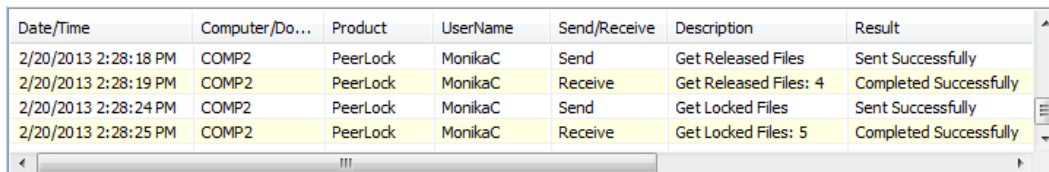


Date/Time	Computer/Do...	Product	UserName	Send/Receive	Description	Result
2/20/2013 2:28:18 PM	COMP2	PeerLock	MonikaC	Send	Get Released Files	Sent Successfully
2/20/2013 2:28:19 PM	COMP2	PeerLock	MonikaC	Receive	Get Released Files: 4	Completed Successfully
2/20/2013 2:28:24 PM	COMP2	PeerLock	MonikaC	Send	Get Locked Files	Sent Successfully
2/20/2013 2:28:25 PM	COMP2	PeerLock	MonikaC	Receive	Get Locked Files: 5	Completed Successfully

Admin Events Table

<p>When enabled via the View menu it will be displayed at the bottom of the Peer Administrator interface. By default this table will show all errors that result due to administrative actions such as failing to copy a remote Profile locally for purposes of editing. Right-click on this table and uncheck the Show Failed Events Only option to display <u>a</u>ll messaging transactions (successful or failed) between PeerSync™, PeerLock™, and the Peer Administrator.</p>	
Date/Time	The following column shows the date and time of the command that was sent or received by the Peer Administrator. You may drag and drop this column to change its location as well as hide it via the Admin Events Pop-Up Menu .
Computer/Domain	The following column shows the computer and domain for the command that was sent or received by the Peer Administrator. You may drag and drop this column to change its location as well as hide it via the Admin Events Pop-Up Menu.
Product	The following column shows the Product name (PeerSync or PeerLock) for the command that was sent or received by the Peer Administrator. You may drag and drop this column to change its location as well as hide it via the Admin Events Pop-Up Menu .
UserName	The following column shows the UserName for the command that was sent or received by the Peer Administrator. You may drag and drop this column to change its location as well as hide it via the Admin Events Pop-Up Menu .
Send/Receive	The following column shows the direction (Send or Receive) for the command that was sent or received by the Peer Administrator. You may drag and drop this column to change its location as well as hide it via the Admin Events Pop-Up Menu .
Description	<p>The following column shows the Description for the command that was sent or received by the Peer Administrator. You may drag and drop this column to change its location as well as hide it via the Admin Events Pop-Up Menu.</p> <p>Examples: Get Remote Profile: \\Server\Path\To\Profile.snc Restart Profile: \\Server\Path\To\Profile.snc Initializing Communication Reprocess Failed Events Release File: \\Path\To\File.xyz</p>
Result	<p>The following column shows the Result for the command that was sent or received by the Peer Administrator. Failed command will appear in red. You may drag and drop this column to change its location as well as hide it via the Admin Events Pop-Up Menu.</p> <p>Examples: Completed Successfully Sent Successfully</p>

	Failed (Could not copy file ...)
--	----------------------------------


Admin Events Pop-Up Menu

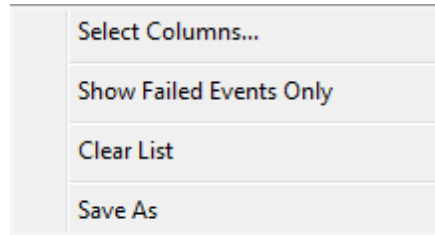

Admin Events Pop-Up Menu	
When enabled via the View menu the Admin Events Panel will be displayed at the bottom of the Peer Administrator interface. Right-click on the panel to view the Admin Events Pop-Up Menu.	
Select Columns...	Displays a dialog from which you can choose to show/hide specific Admin Events Panel columns. You can hide/show the entire Admin Events Panel by disabling/enabling the Show Admin Events item within the View menu. At least one column must be shown in the Admin Events Panel .
Show Failed Events Only	This option is enabled by default. Uncheck this option to display all messaging transactions between PeerSync™, PeerLock™, and the Peer Administrator.
Clear List	Removes/Deletes all entries from the Admin Events Panel .
Save As	Saves the content of the current panel into a CSV file format.

Settings Window

General Tab

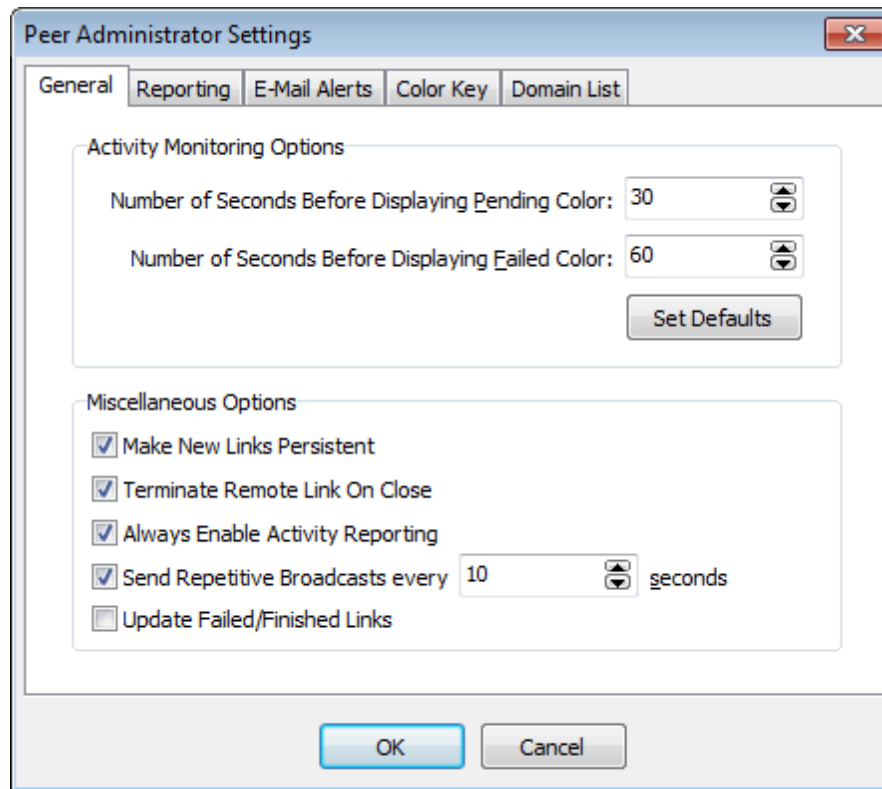

Activity Monitor Options	
Number of Seconds Before Displaying Pending Color	<p>Allows you to determine when to display the 'Pending' color (default Yellow) on a PeerSync™ or PeerLock™ activity. A Passive connection such as 'Pending' occurs if PeerSync™ or PeerLock™ fail to send status information to the Peer Administrator within the specified interval (see 'Send Freq' column and the /GO command line argument in the PeerSync™ Help Manual). Such connections usually occur during normal sync processes and are not critical (i.e. the processing of large files). This setting allows you to specify the number of seconds before displaying the 'Pending' color. This ensures that a persistent failure has occurred before displaying the 'Failed' color. The minimum value allowed before displaying the 'Pending' color may be set as low as 1 second and as high as 86400 seconds (24 hrs). Default setting is 30 seconds.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. This setting applies to both PeerSync and PeerLock activities.


Number of Cycles Before Displaying Failed Color	<p>Allows you to determine when to display the 'Failed' color (default Red) on a PeerSync™ or PeerLock™ activity. A Passive connection such as 'Failed' occurs if PeerSync™ or PeerLock™ fail to send status information to the Peer Administrator within the desired interval (see 'Send Freq' column and the /GO command line argument in the PeerSync™ Help Manual). Such connections usually occur during normal sync processes and are not critical (i.e. the processing of large files). This setting allows you to specify the number of cycles before displaying the 'Failed' color. This ensures that a persistent failure has occurred before displaying the 'Failed' color. The minimum value allowed before displaying the 'Failed' color may be set as low as 1 second and as high as 86400 seconds (24 hrs). Default setting is 60 seconds.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. This setting applies to both PeerSync and PeerLock activities. 2. This setting needs to be equal to or greater then the "Number of Seconds Before Displaying Pending Color" setting above. If this interval is smaller, it will be automatically set to equal the "Pending" color interval.
Set Defaults	A courtesy option which resets the Activity Monitor Options to the default settings.

Miscellaneous Options	
Make New Links Persistent *	Enabling this option forces each Profile to send status information to the Peer Administrator. If PeerSync™ should fail on the remote computer, when it starts up it will automatically start sending status information again.
Terminate Remote Link On Close *	This setting tells each PeerSync™ to stop sending status information to the Peer Administrator if the Peer Administrator closes or terminates. This setting is recommended to prevent unnecessary network traffic and does not affect communication to other Peer Administrator running on the network.
Always Enable Activity Reporting *	Checking this option sends a message to all available PeerSync™ hosted computers to enable them to send status information. Selecting Disable Activity Reporting from the PeerSync Activity Pop-Up Menu will disable this setting.
Send Repetitive Broadcasts every x seconds	Specifies the interval used by the Peer Administrator will broadcast = messages to all available PeerSyncs™ and PeerSyncs™ within the designated domain to begin transmitting status information to the Peer Administrator. The default value used is 10 seconds.
Update Failed/ Finished Links	When enabled this setting will update Failed or Finished entries in the PeerSync Activity panel . This option will eliminate duplicate entries by always updating existing entries.

Notes:

1. * This option is available for PeerSync™ versions 7.3.2 or higher.
2. The [General](#) window can be accessed from the [Edit](#) -> "Settings" menu.

Reporting Tab

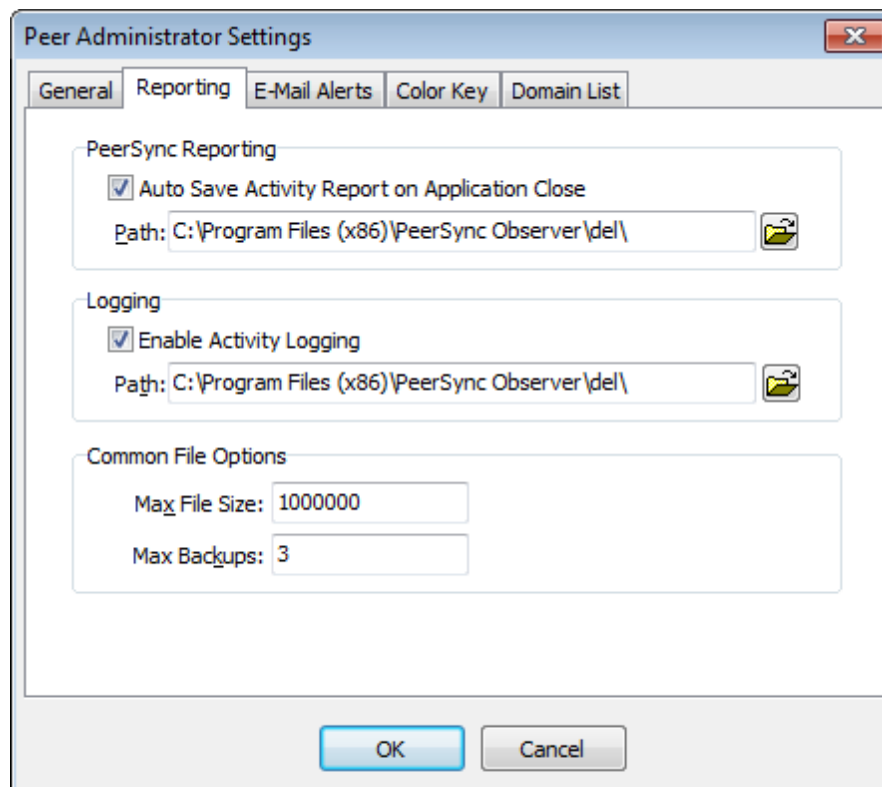

Reporting (These settings apply to items in the PeerSync Activity Panel only.)	
Auto Save Activity Report on Application Close	At the time you exit/close the application, the Peer Administrator will store out the latest Network Activity information into the current report file. If no report file exists, you will then be prompted to create one. By default this option is enabled.
Path	Gives you the ability to save the report file in an alternate path. By default, the report files are stored in the same directory as the Peer Administrator application.

Logging (These settings apply for items in both PeerSync and PeerLock Activity Panels)	
Enable Activity Logging	By default this option is enabled. When this setting is enabled the Peer Administrator will store PeerSync™ and PeerLock™

	activities in the Peer Administrator.LOG file.
Path	Gives you the ability to save the log file in an alternate path. By default, the log files are stored in the same directory as the Peer Administrator application.

Common File Options	
Max File Size	Specify, in bytes, the maximum size of both the reporting and log files. When this size is exceeded, the file will be renamed to a backup file and a new base file created.
Max Backups	Specify the total number of report and/or log files to be retained.

Note: The [Reporting](#) window can be accessed from the [Edit](#) -> "Settings" menu.

Email Alerts

The screenshot shows the 'Peer Administrator Settings' dialog box with the 'E-Mail Alerts' tab selected. The 'Alert Types' section has checkboxes for 'Failed' (checked), 'Finished', 'Failed-Idle', 'Pending', 'Paused', and 'Receiving'. The 'Email Settings' section includes fields for 'SMTP Host' (exchangesrv), 'User ID', 'Port' (25), 'To' (user@company.com), 'CC', and 'From' (PeerAdministrator@company.com). A 'Send Test Email ...' button is at the bottom right of the settings section. 'OK' and 'Cancel' buttons are at the bottom of the dialog.

E-Mail Alerts	
Receive email alerts	Check this option to begin receiving email notifications when the status of a PeerSync instance changes. Check the Alert Types for which you wish to be notified via e-mail. When the

	status of a PeerSync instance changes to the selected type(s) an e-mail notification will be sent.
Alert Types	Select the PeerSync statuses you wish you be notified of via e-mail. When the status of a PeerSync instance changes to the selected type(s) an e-mail notification will be sent. View the Legend section for more information about potential PeerSync statuses (Failed, Finished, Failed-Idle, Pending, Paused, and Receiving).
Email Settings	SMTP Host The host name or IP address of the SMTP mail server to send alert emails to.
	User ID The username to authenticate with the SMTP mail server. This is normally not needed. (Optional)
	Port TCP/IP connection port. It is recommended that you leave the default setting unless your email server requires otherwise.
	To The email address of the person who is to receive the email. This user sometimes needs to be a valid user on the SMTP mail server. You may add multiple email addresses in this field. Use a semicolon (;) as a delimiter.
	CC The email address of the person who is to receive a Carbon Copy of the email. You may add multiple email addresses in this field. Use a semicolon (;) as a delimiter.
	From The email address that will appear in the From field of the email. This e-mail does not need to be a valid e-mail. For example it can be used to identify the message as a notification coming from the Peer Administrator by using an address such as PeerAdministrator@company.com .
	Send Test Email... Clicking this button will send a test email to the configured address(es) and let you know if the Peer Administrator was able to successfully connect and send an email via the configured SMTP mail server. It is highly recommended that you test the configuration before saving the options.

Notes:

1. These settings apply to items in the [PeerSync Activity Panel](#) only.
2. The Email Alerts window can be accessed from the [Edit](#) -> "Settings" menu.

Color Key Tab

Peer Administrator Settings

General Reporting E-Mail Alerts **Color Key** Domain List

Color Key Selection

Failed: dRed

Receiving: dWhite

Finished: dGray

Failed-Idle: dSilver

Pending: dYellow

Paused: dAqua

Set Defaults

OK Cancel

Color Key Selection


This section allows you to set the status color for entries in both [PeerSync™](#) and [PeerLock™](#) Activity Panels. Currently the 'Failed-Idle' and 'Paused' colors do not apply to [PeerLock™](#) entries.

Set Defaults	A courtesy option which resets the Color Key to the default settings.
--------------	---

Notes:

1. The [Color Key](#) window can be accessed from the [Edit](#) -> "Settings" menu or by clicking on the [Color Legend Panel](#).
2. The same color can be selected for multiple connections.

Domain List Tab

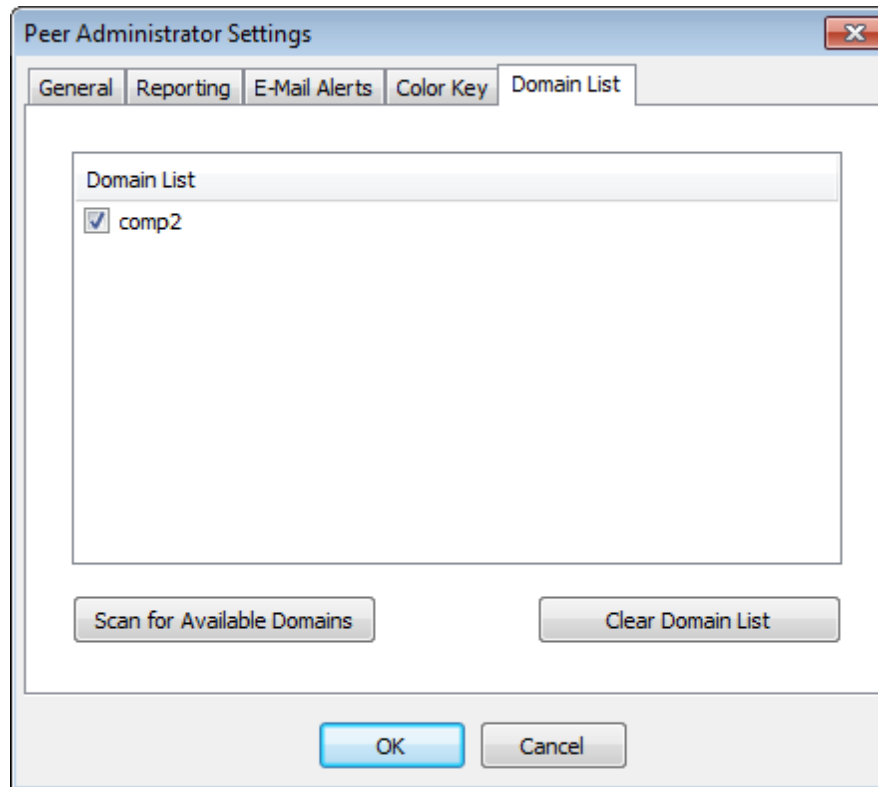


Domain List	
Scan for Available Domains	Searches and lists all available/trusted domains visible from this computer. This option appends new findings to the existing list and will not remove any domains that are no longer visible. By default, the Peer Administrator it will now only scan and enable the current domain for running PeerSync™ and PeerLock™ instances. Other domains found will be listed but not enabled by default.
Clear List	Removes all listed domains.
Add New Item (Pop-Up Menu)	If the Peer Administrator is having problems receiving status information from PeerSyncs™ and PeerLocks™ running on the domain or across the VPN, select this option to add the name of the machine where PeerSync™ and PeerLock™ reside.
Delete New Item (Pop-Up Menu)	Removes only the domain or computer selected.
Scan Selected Domain for Computers	This setting is only available when right-clicking on a domain listed in the panel. Selecting this option will automatically add all the machines listed/available under the selected Domain. This setting will make it easier to add multiple machines to the list. This option only works if the domain selected can see all

	the desired machines where PeerSync™ and PeerLock™ reside.
--	--

Notes:

1. The [Domain List](#) window can be accessed from the [Edit](#) -> "Settings" menu.
2. By default the local domain is always included in the search even if it does not appear in this list.

Profile Operations

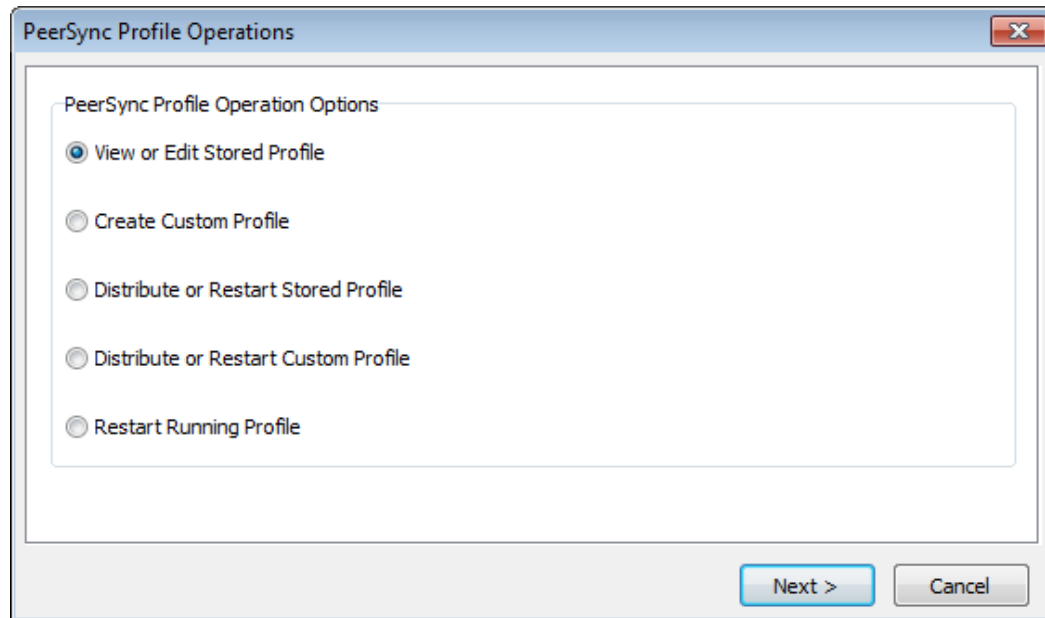

Profile Operations	
View or Edit Stored Profile	<p>With this option you may choose to Download and Edit a desired running Profile. You must first select the Profile you wish to edit from a table that lists all the running instances of PeerSync. In this table the Status column will show Stored if a local copy of the Profile exists on the Peer Administrator system. Otherwise the status will be Unknown.</p> <p>Get Profile Click the Get Profile button to download the selected Profile to the local system for editing. This will cause the remote Profile to be transferred to your Peer Administrator installation directory, into a ProfilesStorage sub folder. The Profile will be stored in a folder named after the remote system from where it was copied (i.e. ..\Peer Administrator\ProfilesStorage\ComputerName\ProfileName.snc).</p>

	<p>Edit Profile</p> <p>The Edit Profile button will become available if the selected Profile exists in the ProfilesStorage folder on the local system where the Peer Administrator is running. Click this button to launch the Profile Editor. This interface is installed by default unless you choose to opt out. You must register the Profile Editor using your PeerSync license key. The Profile Editor will allow you to make Profile modifications using the options/features that your PeerSync license is authorized to use. The Profile Editor is a light weight version of the PeerSync Profiler designed only for PeerSync Profile modifications - PeerLock™ configuration changes are currently not supported. You may start multiple copies of the Profile Editor. Monitor the Admin Events panel for failure notifications.</p> <p>Once you have made your Profile changes use the Distribute or Restart Stored Profile operation to send your changes to the remote server(s) and restart PeerSync for your changes to take effect.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. By default all ".SNC" Profiles get stored in the following directory: ...\\Peer Administrator\\ProfilesStorage\\ComputerName\\ProfileName.snc 2. The original Profile will be maintained for recovery purposes using the following naming convention: ProfileName.snc_ORIG
Create Custom Profile	<p>With this option you may choose to Edit or Create a New Profile.</p> <p>Create New</p> <p>Click this button to launch the Profile Editor and create a brand new Profile. The Profile Editor is installed by default unless you choose to opt out. You must register the Profile Editor using your PeerSync license key. The Profile Editor will allow you to make Profile modifications using the options/features that your PeerSync license is authorized to use. The Profile Editor is a light weight version of the PeerSync Profiler designed only for PeerSync Profile modifications - PeerLock configuration updates are currently not supported. You may start multiple copies of the Profile Editor.</p> <p>Edit Profile</p> <p>The Edit Profile button will become available if you select a Profile stored on the local system or anywhere else on the network. Click the Edit Profile button to launch the Profile Editor. This interface is installed by default unless you choose to opt out. You must register the Profile Editor using your PeerSync license key. The Profile Editor will allow you to make Profile modifications using the options/features that your PeerSync license is authorized to use. The Profile Editor is a light weight version of the PeerSync Profiler designed only for PeerSync Profile modifications - PeerLock configuration updates are currently not supported. You may start multiple</p>


	<p>copies of the Profile Editor. Monitor the Admin Events panel for failure notifications.</p> <p>Once you have created a new Profile or updated an existing one, use the Distribute or Restart Custom Profile operation to send your changes to the remote server(s) and restart PeerSync for your changes to take effect.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. By default all ".SNC" Profiles get stored in the following directory: ...\\Peer Administrator\\ProfilesStorage\\ComputerName\\ProfileName.snc 2. The original Profile will be maintained for recovery purposes using the following naming convention: ProfileName.snc_ORIG
Distribute or Restart Stored Profile	<p>With this option you may choose to Download, Edit, Distribute, and Restart a desired running Profile. You must first select the Profile you wish to edit from a table that lists all the running instances of PeerSync. In this table the Status column will show Stored if a local copy of the Profile exists on the Peer Administrator system. Otherwise the status will be Unknown.</p> <p>Get Profile Click the Get Profile button to download the selected Profile to the local system for editing. This will cause the remote Profile to be transferred to your Peer Administrator installation directory, into a ProfilesStorage sub folder. The Profile will be stored in a folder named after the remote system from where it was copied (i.e. ...\\Peer Administrator\\ProfilesStorage\\ComputerName\\ProfileName.snc).</p> <p>Edit Profile The Edit Profile button will become available if the selected Profile exists in the ProfilesStorage folder on the local system where the Peer Administrator is running. Click this button to launch the Profile Editor. This interface is installed by default unless you choose to opt out. You must register the Profile Editor using your PeerSync license key. The Profile Editor will allow you to make Profile modifications using the options/features that your PeerSync license is authorized to use. The Profile Editor is a light weight version of the PeerSync Profiler designed only for PeerSync Profile modifications - PeerLock configuration updates are currently not supported. You may start multiple copies of the Profile Editor. Monitor the Admin Events panel for failure notifications.</p> <p>Next Once you have made your Profile changes, select the running Profile instance you wish to update/restart then click the Next button. The dialog will now show all the instances of PeerSync that are currently running with Profiles matching the name of the local Profile you wish to distribute.</p> <p>Select All</p>

	<p>Click the Select All button to select/check all the Profile instances that have the same name as the local Profile you wish to distribute. Note: Use caution when using this option. The Profiles listed have the same name as the local Profile you wish to distribute, but may have different configuration options.</p> <p>Distribute Once you've selected a target PeerSync(s) to update you may click the Distribute button. This option will transfer the desired Profile to the selected target system(s). Monitor the Admin Events panel for failure notifications.</p> <p>Distribute/Restart Once you've selected a target PeerSync(s) to update you may click the Distribute/Restart button. This option will transfer the desired Profile to the selected target system(s) followed by a restart of PeerSync in order for the changes to take effect. Monitor the Admin Events panel for failure notifications.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. By default all ".SNC" Profiles get stored in the following directory: ...\\Peer Administrator ProfilesStorage\\ComputerName\\ProfileName.snc 2. The original Profile will be maintained for recovery purposes using the following naming convention: ProfileName.snc_ORIG
Distribute or Restart Custom Profile	<p>With this option you may choose to Distribute, Restart, Edit, or Create a New Profile.</p> <p>Create New Click this button to launch the Profile Editor and create a brand new Profile. The Profile Editor is installed by default unless you choose to opt out. You must register the Profile Editor using your PeerSync license key. The Profile Editor will allow you to make Profile modifications using the options/features that your PeerSync license is authorized to use. The Profile Editor is a light weight version of the PeerSync Profiler designed only for PeerSync Profile modifications - PeerLock configuration updates are currently not supported. You may start multiple copies of the Profile Editor.</p> <p>Edit Profile The Edit Profile button will become available if you select a Profile stored on the local system or anywhere else on the network. Click the Edit Profile button to launch the Profile Editor. This interface is installed by default unless you choose to opt out. You must register the Profile Editor using your PeerSync license key. The Profile Editor will allow you to make Profile modifications using the options/features that your PeerSync license is authorized to use. The Profile Editor is a light weight version of the PeerSync Profiler designed only for PeerSync Profile modifications - PeerLock configuration updates are currently not supported. You may start multiple</p>

	<p>copies of the Profile Editor. Monitor the Admin Events panel for failure notifications.</p> <p>Next Once you have created a new Profile or updated an existing one, click the Next button. The dialog will now show all the instances of PeerSync that are currently running with Profiles matching the name of the local Profile you wish to distribute</p> <p>Select All Click the Select All button to select/check all the Profile instances that have the same name as the local Profile you wish to distribute. Note: Use caution when using this option. The Profiles listed have the same name as the local Profile you wish to distribute, but may have different configuration options.</p> <p>Distribute Once you've selected a target PeerSync(s) to update you may click the Distribute button. This option will transfer the desired Profile to the selected target system(s). Monitor the Admin Events panel for failure notifications.</p> <p>Distribute/Restart Once you've selected a target PeerSync(s) to update you may click the Distribute/Restart button. This option will transfer the desired Profile to the selected target system(s) followed by a restart of PeerSync in order for the changes to take effect. Monitor the Admin Events panel for failure notifications.</p> <p>Notes:</p> <ol style="list-style-type: none"> 1. By default all ".SNC" Profiles get stored in the following directory: ...\\Peer Administrator\\ProfilesStorage\\ComputerName\\ProfileName.snc 2. The original Profile will be maintained for recovery purposes using the following naming convention: ProfileName.snc_ORIG
Restart Running Profile	<p>Select the PeerSync instances to restart.</p> <p>Select All Click the Select All button to select all the running Profile instances to restart PeerSync. This feature will work for all running instances of PeerSync, even if they are not running as a service.</p> <p>Restart Once you have selected the running PeerSync instances to restart click the Restart button to issue a restart command. Monitor the Admin Events panel for failure notifications.</p>

Notes: These options are only available when using the [PeerSync Administrator Enterprise Package](#).

Color Legend Panel




Legend	
<p>The colors shown in this legend are used by the PSPeer Administrator to represent the connection status of each row in the PeerSync™ and PeerLock™ Activity Panels. Currently only the Active/Receiving (White), Pending (Yellow), Failed (Red), and Finished (Dark Gray) colors apply to PeerLock entries. Paused and Failed-Idle will only apply to PeerSync items.</p>	
Receiving	Actively receiving incoming status. The value of this status is 1 and can be shown in the Status column of the PeerSync Activity Panel .
Paused	Connection is active but remote application is currently paused. The value of this status is 2 and can be shown in the Status column of the PeerSync Activity Panel .
Failed	Lost connection while remote application was processing data. This suggests that PeerSync™ may have not completed its tasks before terminating. The value of this status is 5 and can be shown in the Status column of the PeerSync Activity Panel .
Pending	Remote application is temporarily not responding. The value of this status is 3 and can be shown in the Status column of the PeerSync Activity Panel .
Finished	Remote application was terminated in a normal manner. The value of this status is 0 and can be shown in the Status column of the PeerSync Activity Panel .
Failed/Idle	Lost connection while remote application was idle. This suggests that PeerSync™ completed its tasks before terminating. The value of this status is 4 and can be shown in the Status column of the PeerSync Activity Panel .

Notes:

1. By default this panel is shown and can be removed by unchecking the 'Show Color Legend Panel' option from the [View](#) menu.
2. Placing the mouse over a color in the [Color Legend Panel](#) displays a hint which describes the meaning of that color.
3. Clicking on one of the colors on the panel opens the [Settings](#) window where you may change or reset the colors. Alternatively, you may access the [Settings](#) window from the [Edit](#) menu.
4. Each status is represented as an integer (-1 to 5) and can be viewed in the [Status](#) column of the [PeerSync Activity Panel](#) (0 = Finished, 1 = Receiving, 2 = Paused, 3 = Pending, 4 = Failed-Idle, 5 = Failed, -1 = Unknown)

Profile Editor

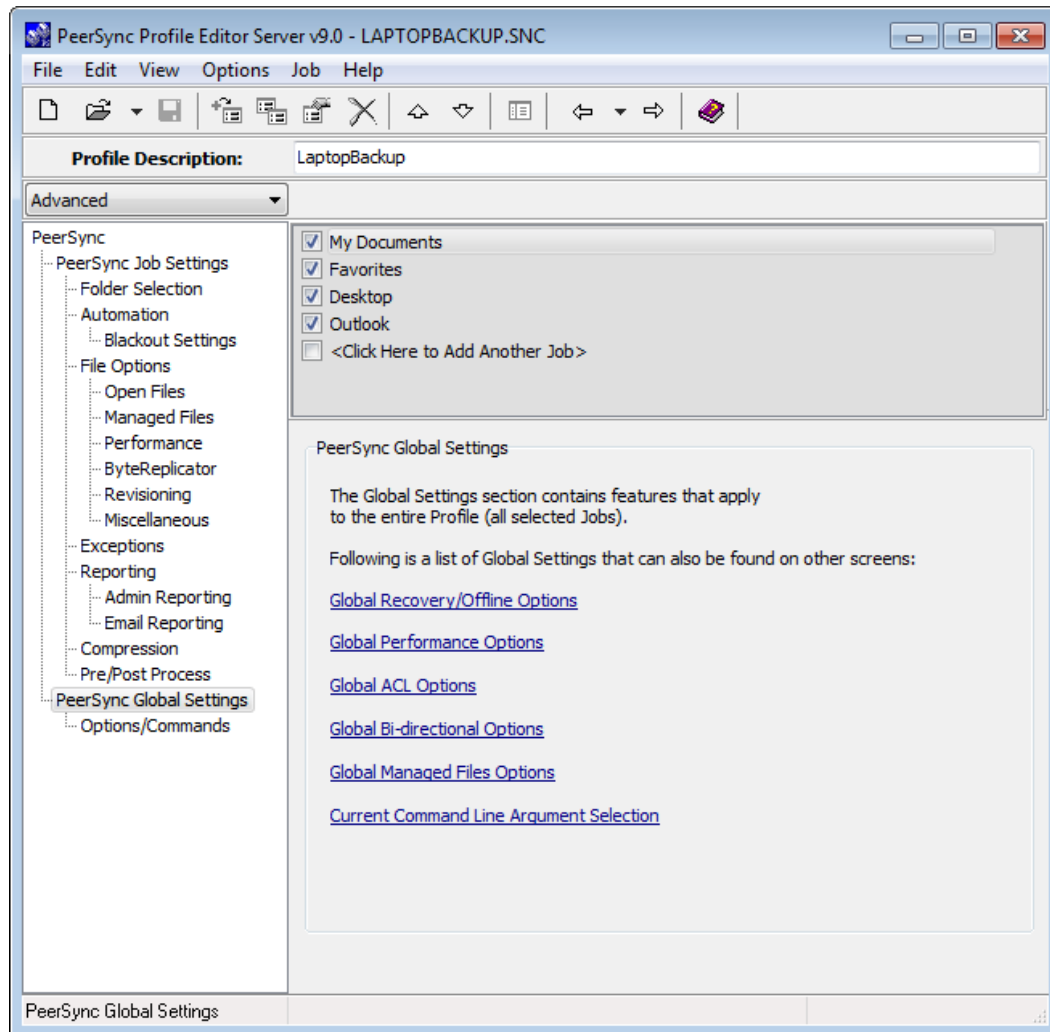


PeerSync Profile Editor

The Profile Editor is installed by default unless you choose to opt out. It is used to create or edit Profiles and is launched when selecting the Create New or Edit Profile settings from the [Profile Operations](#) window. Before starting the Profile Editor you must register it using your PeerSync license key. The Profile Editor will allow you to make Profile modifications using the options/features that your PeerSync license is authorized to use. The Profile Editor is a light weight version of the PeerSync Profiler designed only for PeerSync Profile creations/modifications - PeerLock configuration updates are currently not supported. You may start multiple copies of the Profile Editor.

For detailed information on all the Profile Editor options please review the [PeerSync Help](#) manual.

Status Display

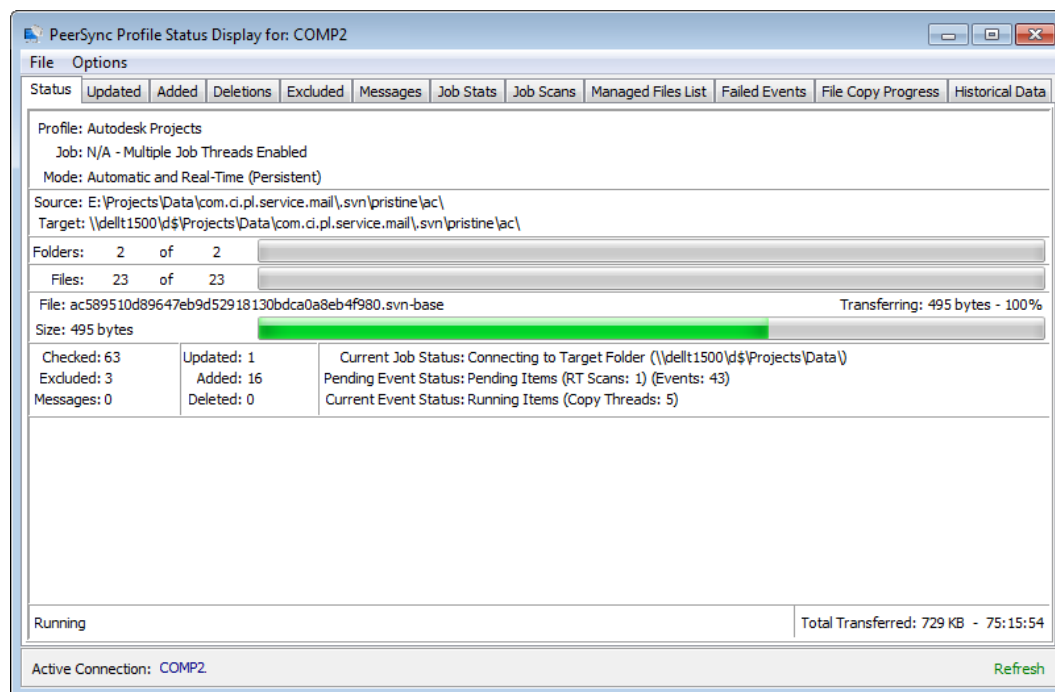

Status Tab Features

The Status Display window can be accessed by double clicking on one of the items within the [PeerSync Activity Table](#) or by selecting [Connect to Status Display](#) from the [PeerSync Activity Pop-Up Menu](#). The Status Display window is the same display window used in PeerSync™ to view Current Profile Activity within the PeerSync™ application. This window is not accessible when PeerSync™ is running as a Service.

Profile	Displays the name of the Profile actively being processed. This label may not match the name of the Profile currently being configured through the Profiler.
Job	This indicator will dynamically display the name of whichever Job is presently being processed for the Active Profile.
Mode	Displays the Operation Mode (Real-time Mode, Scheduled Operation, etc.) applied to synchronization of the Active Profile.
Source	Displays a file path for the Source Folder presently being synchronized.
Target	Displays a file path for the Target Folder presently being synchronized from the Source indicated above.
Folders	This indicator provides a count of all unsynchronized folders contained within the Source, and will decrease as each folder is synchronized. An additional "thermometer" indicator will also track the progress of folder synchronization.

Files	This indicator displays the total number of files contained within the Source while also providing a count of synchronized files. In addition, a "thermometer" indicator will show file synchronization progress by increasing according to the size of the current folder, with 100% representing the cumulative size of files contained within the Source Job set.
File	Indicates the name of the file currently being synchronized.
Large File or Compression Status	This caption will be displayed to the right of the file name that is currently synchronized for large files and during compression. The caption will show the size of the file that has been copied to the Target and/or compression status.
Size	Indicates the size (in bytes) of the file currently being synchronized. A related "thermometer" indicator tracks the progress of synchronization for that file.
Checked	This indicator displays the total number of source files/folders that have been validated for all Profile Jobs.
Excluded	Indicates the number of files that were excluded from synchronization.
Messages	Indicates the number of error messages generated during Profile processing.
Updated	Indicates the number of Target Files that were updated during synchronization of all Profile Jobs.
Added	Indicates the number of new files added to the Target Folders during the synchronization of all Profile Jobs.
Deleted	Indicates the number of files deleted (or moved) during synchronization of all Profile Jobs.
Elapsed Time	Indicates the amount of time that has elapsed during the current Profile activity.
Refresh	Refreshes the Status Display features.
Close	Will close the Status Display, which can be re-accessed via double-clicking on an item within the Activity Table.

Other Tab Features	
Updated	Screen containing statistical information (File Name, Size, Modified Date/Time, Path, Duration, etc.) about the updates that occurred during the current PeerSync™ session. Right-click and select Save As to export the list into a CSV file format (PSUpdated.csv).
Added	Screen containing statistical information (File Name, Size, Modified Date/Time, Path, Duration, etc.) about the file adds that occurred during the current PeerSync session. Right-click and select Save As to export the list into a CSV file format

	(PSAdded.csv).
Deleted	Screen containing statistical information (File Name, Size, Modified Date/Time, Path, Duration, etc.) about the deletions that occurred during the current PeerSync™ session. Right-click and select Save As to export the list into a CSV file format (PSDeleted.csv).
Excluded	Screen containing statistical information (File Name, Size, Modified Date/Time, Path, Note, etc.) about the exclusions that occurred during the current PeerSync™ session. Right-click and select Save As to export the list into a CSV file format (PSExcluded.csv).
Messages	Screen containing a list of error messages generated during the current PeerSync™ session. Right-click and select Save As to export the list into a CSV file format (PSMessages.csv).
Job Stats	Screen containing a list of all the Jobs configured under the current Profile with their respective Source and Target paths. Right-clicking on this table brings up a pop-up menu providing the ability to View Log File and Open the Source/Target Folders for the selected Jobs from the remote PeerSync.
Job Scans	Lists how many scans are running at a Job level either for the selected Job or for all the Jobs. Right-click and select Save As to export the list into a CSV file format (PSJobScans.csv).
Managed Files List	Lists the total number of files that are in the Managed Files List for the selected Job or all the Jobs. Right-click and select Save As to export the list into a CSV file format (PSManagedFilesList.csv).
Failed Events	Lists all the failed files for the selected Job or all the Jobs. You can right-click the list and select Reprocess Failed Events to notify PeerSync to re-process them for all the Jobs (not Job specific). To reprocess only a specific file, you can click the Reprocess Selected button from the Failed Events tab within the PeerSync Status Display (when running as an application only). Right-click and select Save As to export the list into a CSV file format (PSFaileEvents.csv).
File Copy Progress	Visually displays the file copy progress for each file for the selected Job or all the Jobs. Right-click and select Save As to export the list into a CSV file format (PSFileCopyProgress.csv).
Historical Data	This panel displays a subset of the Job Stats table (Xfer Rate, Bytes and Event Averages) in an hourly, daily, weekly, and total format for all the Jobs or only the selected Job. Furthermore, it displays a Running Event Count, a Running Event Average and Peak Count, and a Running Job Count. Right-click and select Save As to export the list into a CSV file format (PSHistoricalData.csv).

License

YOU SHOULD READ CAREFULLY THE FOLLOWING TERMS AND CONDITIONS BEFORE INSTALLING, USING OR DISTRIBUTING THIS SOFTWARE. INSTALLING, USING OR DISTRIBUTING THIS SOFTWARE INDICATES ACCEPTANCE OF THESE TERMS AND CONDITIONS. IN THIS AGREEMENT, "YOU" MEANS YOU AS AN INDIVIDUAL IF YOU ARE USING THIS SOFTWARE FOR PERSONAL USE. IF YOU ARE USING THE SOFTWARE ON EQUIPMENT OWNED OR OPERATED BY A COMPANY OR ORGANIZATION (COLLECTIVELY "COMPANY"), BY ACCEPTING THIS AGREEMENT, YOU REPRESENT THAT YOU ARE DULY AUTHORIZED TO ACCEPT THIS AGREEMENT ON BEHALF OF YOUR COMPANY.

COPYRIGHT

The software programs (hereafter the "Software") and documentation (hereafter the "Documentation") is copyrighted and remains the property of Peer Software, Inc. All rights are reserved.

LICENSE

Peer Software, Inc. hereby grants you (hereafter the "User") a limited, non-exclusive, non-transferable license to install and use the Software and accompanying Documentation contained in the trialware distribution package (hereafter called the "Trialware Package") you received (THE "Original Distribution") for your internal business purposes only. The Trialware Package consists of copies of the Software and Documentation received via an electronic transfer mechanism or an electronic storage medium including, but not limited to, diskette, hard disk, removable disk, tape or optical devices such as CD-ROM or WORM. This license to install and use the Software and Documentation is conditioned upon User's compliance with the terms of this Agreement.

You may install and use the Trialware Package on one or more computers provided there is no chance that it will be used simultaneously on more than one computer. If you need to use the Software on more than one computer simultaneously or on a network, please contact Peer Software, Inc. for information about network licenses.

The Software is protected by trade secret and copyright laws and international treaty provisions. You are not obtaining title to the Software or Documentation or any copyright or other intellectual property rights. You further acknowledge that title and full ownership rights to the Software and Documentation will remain the exclusive property of Peer Software, Inc. or its suppliers, and You will not acquire any ownership rights to the Software. You may not sublicense, lease, rent, sell, convey, translate, modify, decompile, incorporate into another product, convert to another programming language, reverse engineer or disassemble the Software or Documentation for any purpose. You may not modify, or create derivative works based in whole or in part upon, the Software. You agree to not remove, obscure, or alter Peer Software, Inc.'s or any third party's copyright notice, trademarks, or other proprietary rights notices affixed to or contained within or accessed in conjunction with or through the Software and Documentation. Peer Software, Inc. reserves the right to periodically conduct audits upon advance written notice to verify compliance with the terms of this Agreement.

Once a license is purchased from Peer Software, Inc., the Trialware Package will be authorized to function as the full working version of the Software with access to all licensed features.

NETWORK LICENSE

Multiple users on a network (e.g. a LAN) requiring access to the Software and Documentation must purchase a Network License. Two forms of Network Licenses are offered, a Site License and Enterprise or Concurrent User License. With a Site License, any user who accesses the Software or Documentation requires a user license, regardless of the frequency of use. Once a Site License is purchased Software and Documentation may be copied to all users who have been licensed. Site Licenses are customized for each purchase. The license is based on a quantity of simultaneous users and or CPU installations.

The Concurrent User License allows the licensed number of users to simultaneously access the Software and Documentation. The User agrees to operate metering software, which restricts the simultaneous number of users to the quantity purchased. The Software and Documentation must be installed on network servers under the control of metering software.

Both Site and Concurrent User Licenses allow installation of the Software and Documentation to any number of servers on any number of geographic sites, limited only by the quantity of licenses purchased.

TERM AND TRIAL PERIOD

You are permitted to use the Trialware Package for a trial period (hereafter the "Trial Period") of thirty (30) days or 30 uses (which ever comes first) after receipt of the Trialware Package. After such time, if you continue to use the Trialware Package, you must register your copy with Peer Software, Inc. Failure to register after the Trial Period constitutes termination of this license. Upon registration, a password (hereafter called the "Password") will be provided to eliminate the registration reminder screen.

This license is effective until terminated. You may terminate it by destroying the Software, Documentation, and all copies thereof. This license will also terminate if you fail to comply with any of the terms or conditions herein. You agree, upon such termination, to destroy all Software, Documentation, and copies thereof. Upon request, You agree to certify in writing that all copies of the Software and Documentation have been destroyed.

LIMITED WARRANTY

THE SOFTWARE AND DOCUMENTATION IS PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND. PEER SOFTWARE, INC. DISCLAIMS ALL WARRANTIES RELATING TO THIS SOFTWARE, WHETHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND INFRINGEMENT AND ALL SUCH WARRANTIES ARE EXPRESSLY AND SPECIFICALLY DISCLAIMED.

EXCLUSIVE REMEDY

YOUR EXCLUSIVE REMEDY AND PEER SOFTWARE, INC. ENTIRE LIABILITY ARISING FROM OR IN CONNECTIONS WITH THE SOFTWARE, DOCUMENTATION, AND/OR THIS LICENSE (INCLUDING WITHOUT LIMITATION FOR BREACH OF WARRANTY OR INFRINGEMENT) SHALL BE, AT PEER SOFTWARE, INC.'S OPTION, THE REPAIR OR REPLACEMENT OF THE SOFTWARE OR REFUND OF REGISTRATION FEES (IF NOTIFICATION OF PROBLEM IS WITHIN 30 DAYS OF PURCHASE).

LIMITATIONS OF LIABILITY

UNDER NO CIRCUMSTANCES OR LEGAL THEORY, WHETHER IN TORT, CONTRACT, OR OTHERWISE, SHALL PEER SOFTWARE, INC. OR ANYONE ELSE WHO HAS BEEN INVOLVED IN THE CREATION, PRODUCTION, OR DELIVERY OF THIS SOFTWARE BE LIABLE TO YOU OR TO ANY OTHER PERSON FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES (EVEN IF PEER SOFTWARE, INC. SHALL HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES), INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF GOODWILL, WORK STOPPAGE, COMPUTER FAILURE OR MALFUNCTION, OR, FOR ANY OTHER DAMAGES OR LOSSES OF ANY NATURE. IN NO EVENT WILL PEER SOFTWARE, INC. BE LIABLE FOR ANY DAMAGES IN EXCESS OF THE LIST PRICE PEER SOFTWARE, INC. CHARGES FOR A LICENSE TO THE SOFTWARE.

Some states do not allow the exclusion of the limit of liability for consequential or incidental damages, so the above limitation may not apply to you.

BACK-UP

You may make one copy of the Trialware Package for backup purposes only.

DISTRIBUTION

You may distribute the Trialware Package to others via an electronic transfer mechanism or electronic storage media provided that no files are deleted from the Original Distribution Trialware Package or are modified in any way. Files may be added to the Trialware Package expressly for the purpose of identifying the party distributing the Trialware Package. You may also place the Trialware Package into any archive or compressed format for ease of distribution.

You may not distribute the product Registration Key to others under any circumstances.

GENERAL

Export of the Software may be subject to compliance with the rules and regulations promulgated from time to time by the Bureau of Export Administration, United States Department of Commerce, which restrict the export and re-export of certain products and technical data. If the export of the Software is controlled under such rules and regulations, then the Software shall not be exported or re-exported, directly or indirectly, (a) without all export or re-export licenses and United States or other governmental approvals required by any applicable laws, or (b) in violation of any applicable prohibition against the export or re-export of any part of the Software. Some countries have restrictions on the use of encryption within their borders, or the import or export of encryption even if for only temporary personal or business use. You acknowledge that the implementation and enforcement of these laws is not always consistent as to specific countries. Although the following countries are not an exhaustive list there may exist restrictions on the exportation to, or importation of, encryption by: Belgium, China (including Hong Kong), France, India, Indonesia, Israel, Russia, Saudi Arabia, Singapore, and South Korea. You acknowledge it is your ultimate responsibility to comply with any and all government export and other applicable laws and that Peer Software, Inc. has no further responsibility after the initial license to you within the original country of sale.

In addition, neither the Software nor the Documentation and underlying information or

technology may be downloaded or otherwise exported or re-exported (i) into (or to a national or resident of) any country to which the United States has embargoed goods; or (ii) to anyone on the United States Treasury Department's list of Specially Designated Nations or the United States Commerce Department's Table of Denial Orders. By using the Software you are agreeing to the foregoing and you are certifying that you are not located in, under the control of, or a national or resident of any such country or on any such list.

This agreement shall be governed by the laws of the state of New York and shall inure to the benefit of Peer Software, Inc. and any successors, administrators, heirs, and assigns. Any action arising under this Agreement shall be filed in any state or federal court located in Suffolk county in the State of New York, and You hereby agree, acknowledge and submit to the exclusive jurisdiction and venue of such courts for the purposes of such action, waive any right You may have to object to such jurisdiction or venue.

This Agreement sets forth all rights for the user of the Software and is the entire agreement between You and Peer Software, Inc. and supersedes any other prior or contemporaneous agreements or communications with respect to the Software and Documentation. This Agreement may not be modified except by a written addendum issued by a duly authorized representative of Peer Software, Inc. No provision hereof shall be deemed waived unless such waiver shall be in writing and signed by Peer Software, Inc. or a duly authorized representative of Peer Software, Inc. If any provision of this Agreement is held invalid, the remainder of this Agreement shall continue in full force and effect. The parties confirm that it is their wish that this Agreement has been written in the English language only.

Index

- # -

#Locks 20

- / -

/GO 1

/GOC 11

- A -

Accessed By 20

Activity Monitor Options: 30

Number of Cycles Before Displaying Failed Color 30

Number of Cycles Before Displaying Pending Color 30

Time Between Status Checks 30

Activity Table Columns 10

Activity Table:

Activity PopUp Menu 14

Activity Table Columns 10

Admin Events Pop-Up Menu: 29

Clear List 29

Show Failed Events Only 29

Admin Events Table 27

Always Enable Activity Reporting 31

Append - Reporting 7

Application 20

Auto Save Activity Report on Application Close 32

- C -

Clear List 29

Clear Refresh Item(s) in Table 26

Clear/Refresh Entries In Table 14

Closed by Operator or System Shutdown 11

Closed Normally 11

Color Key Settings Tab 35

Color Legend Panel 42

Common File Option Settings: 33

Max Backups 32, 33

Max File Size 32, 33

Computer 20

Connect to Status Display 14

Create/Overwrite - Reporting 7

Current Status 20

- D -

Daily Timer w/RT 11

Delete - Logging 8

Delete - Reporting 7

Detection Type 20

Disable Activity Reporting 14

Disabled/Unknown = -1 12

Domain List Settings Tab:

Scan for Available Domains 36

DomainList Section 1

Duration 20

- E -

Enable Activity Logging 32

Enable Activity Reporting 14

Enable Logging 8

- F -

Failed 42

Failed = 5 12

Failed Events (Process) 16

Failed Scans (Process) 16

Failed-Idle 42

Failed-Idle = 4 12

Finished 11, 42

Finished = 0 12

- G -

General Settings Tab: 30

Activity Monitor Options 30

Always Enable Activity Reporting 30

Make new Links Persistent 30

Miscellaneous Options 30

Number of Cycles Before Displaying Failed Color 30

Number of Cycles Before Displaying Pending Color 30

Send Repetitive Broadcasts 30

General Settings Tab: 30
 Terminate Remote Link On Close 30
 Getting Started 1
 GO 1

- I -

Idle Time 20
 Installation 1
 Introduction 1

- J -

Job/Copy Threads 11

- L -

License 47
 Limitations 1
 Load Time 10
 Lock File Handle 20
 Lock/Released List Popup Menu: 26
 Clear Refresh Item(s) in Table 26
 Re-Send Connection Request 26
 Select Columns... 26
 Set Transmit Frequency On 26
 Locked 20
 Locked List: 20
 #Locks 20
 Accessed By 20
 Application 20
 Computer 20
 Current Status 20
 Detection Type 20
 Duration 20
 Idle Time 20
 Lock File Handle 20
 Locked 20
 Released Detected 20
 Send Freq 20
 Source Access Allowed 20
 Source Attributes 20
 Source File Path 20
 Source Handle 20
 Source Modified 20
 Source Open Mode 20
 Status Level 20

Target Access Allowed 20
 Target File Path 20
 Target Handle 20
 Target Open Mode 20
 Temporary Releases 20
 Version 20
 Logging (View Menu) 8
 Logging (View Menu):
 Delete 8
 Enable Logging 8
 View 8
 Logging Settings: 32
 Enable Activity Logging 32
 Path 32

- M -

Mail Slots 1
 Make new Links Persistent 31
 Max Backups 33
 Max File Size 33
 Microsoft mail slots 1
 Misc Options: 31
 Always Enable Activity Reporting 31
 Make new Links Persistent 31
 Send Repetitive Broadcasts 31
 Terminate Remote Link On Close 31
 Miscellaneous Options: 30
 Always Enable Activity Reporting 30
 Make new Links Persistent 30
 Send Repetitive Broadcasts 30
 Terminate Remote Link On Close 30
 Update Failed/Finished Links 30
 Monitoring (Persistent) 11

- N -

Not Connected 11
 NP (Non Persistent) 10
 Number of Cycles Before Displaying Failed Color 30
 Number of Cycles Before Displaying Pending Color 30

- P -

Path (Logging) 32
 Path (Reporting) 32

- Pause PeerSync On 15
- Paused 42
- Paused = 2 12
- PeerLock Locked List: 20
 - #Locks 20
 - Accessed By 20
 - Application 20
 - Computer 20
 - Current Status 20
 - Detection Type 20
 - Duration 20
 - Idle Time 20
 - Lock File Handle 20
 - Locked 20
 - Released Detected 20
 - Send Freq 20
 - Source Access Allowed 20
 - Source Attributes 20
 - Source File Path 20
 - Source Handle 20
 - Source Modified 20
 - Source Open Mode 20
 - Status Level 20
 - Target Access Allowed 20
 - Target File Path 20
 - Target Handle 20
 - Target Open Mode 20
 - Temporary Releases 20
 - Version 20
- PeerLock Released List:
 - #Locks 22
 - Accessed By 22
 - Application 22
 - Computer 22
 - Current Status 22
 - Detection Type 22
 - Duration 22
 - Idle Time 22
 - Lock File Handle 22
 - Locked 22
 - Released Detected 22
 - Send Freq 22
 - Source Access Allowed 22
 - Source Attributes 22
 - Source File Path 22
 - Source Handle 22
 - Source Modified 22
 - Source Open Mode 22
- Status Level 22
- Target Access Allowed 22
- Target File Path 22
- Target Handle 22
- Target Open Mode 22
- Temporary Releases 22
- Version 22
- PeerLock Released List: 22
- PeerSync Activity PopUp Menu: 14
 - Clear/Refresh Entries In Table 14
 - Connect to Status Display 14
 - Disable Activity Reporting 14
 - Enable Activity Reporting 14
 - Reprocess Failed Events 14
 - Reprocess Failed Scans 14
 - Re-Send Connection Request 14
 - Select Columns... 14
 - Set Transmit Frequency 14
- PeerSync Activity Table:
 - PeerSync Activity PopUp Menu 14
- PeerSync Columns:
 - Activity 11
 - Added 11
 - Checked 11
 - Computer 10
 - Current Status 11
 - Cycle 12
 - Deleted 11
 - Detected Events 13
 - Domain 12
 - Failed Files 13
 - Failed Scans 13
 - Group 11
 - Job Count 13
 - Messages 11
 - Pending Events 13
 - Pending Managed Files 13
 - Pending Retries 13
 - Pending Scans 13
 - Profile Date Modified 13
 - Send Freq 12
 - Status Level 12
 - Time 11
 - Total bytes Copied 12
 - Updated 11
 - User 12
 - Version 12
- Pending 42

Pending = 3 12
 Prerequisites 1
 Process Failed Events 16
 Process Failed Scans 16
 Processing Selected Jobs 11
 Profile Editor 43
 Profile Operations 16
 PSOBSDEF.CFG 1

- R -

Released List: 22
 #Locks 22
 Accessed By 22
 Application 22
 Computer 22
 Current Status 22
 Detection Type 22
 Duration 22
 Idle Time 22
 Lock File Handle 22
 Locked 22
 Released Detected 22
 Send Freq 22
 Source Access Allowed 22
 Source Attributes 22
 Source File Path 22
 Source Handle 22
 Source Modified 22
 Source Open Mode 22
 Status Level 22
 Target Access Allowed 22
 Target File Path 22
 Target Handle 22
 Target Open Mode 22
 Temporary Releases 22
 Version 22
 Receiving 42
 Receiving = 1 12
 Registration 1
 Release Selected Lock 27
 Release All Locks 27
 Released Detected 20
 Reporting (View Menu): 7
 Append 7
 Create/Overwrite 7
 Delete 7
 Save 7

Save Content on Close 7
 View 7
 Reporting Settings Tab: 32
 Auto Save Activity Report on Application Close 32
 Common File Option Settings 32
 Enable Activity Logging 32
 Logging Settings 32
 Max Backups 32
 Max File Size 32
 Reporting Settings 32
 Reporting Settings: 32
 Auto Save Activity Report on Application Close 32
 Path 32
 Reprocess Failed Events 14
 Reprocess Failed Scans 14
 Re-Send Connection Request 14, 26
 Resume PeerSync On 15
 Running 11

- S -

Save - Reporting 7
 Save Content on Close - Reporting 7
 Scan for Available Domains 36
 Select Columns... 14, 26
 Select Computer to Start PeerSync Service 15
 Send Freq 20
 Send Repetitive Broadcasts 31
 Service Operations: 15
 Pause PeerSync On 15
 Resume PeerSync On 15
 Select Computer to Start PeerSync Service 15
 Start PeerSync On 15
 Stop PeerSync On 15
 Set Transmit Frequency 14
 Set Transmit Frequency On 26
 Show Failed Events Only 29
 Source Access Allowed 20
 Source Attributes 20
 Source File Path 20
 Source Handle 20
 Source Modified 20
 Source Open Mode 20
 Start PeerSync On 15
 Status Display 44
 Status Level 20

Stop PeerSync On 15
Support 1
SVC (Service) 10

- T -

Target Access Allowed 20
Target File Path 20
Target Handle 20
Target Open Mode 20
Temporary Releases 20
Terminate Remote Link On Close 31
Terms and Conditions 1
Time Between Status Checks 30

- V -

Version 20
View - Logging 8
View - Reporting 7