


B21

POLYESTER & FOIL

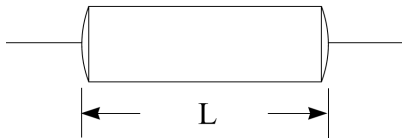

LEAD LENGTH = 1.5" MIN.

Axial Lead ROUND Wrap & Fill

Lead Gauge	200VDC	400VDC	600VDC
24AWG	.001 - .10	.001 - .033	.001 - .015
22AWG	.12 - .22	.039 - .10	.018 - .047
20AWG	.27 - 2.0	.12 - 1.0	.056 - .47

MFD	200 VDC			400 VDC			600 VDC		
	D +.05	L +.05	PART NO.	D +.05	L +.05	PART NO.	D +.05	L +.05	PART NO.
.0010	.14	.53	B21C102	.14	.53	B21E102	.14	.53	B21F102
.0012	.14	.53	B21C122	.14	.53	B21E122	.14	.53	B21F122
.0015	.14	.53	B21C152	.14	.53	B21E152	.14	.53	B21F152
.0018	.14	.53	B21C182	.14	.53	B21E182	.16	.68	B21F182
.0022	.14	.53	B21C222	.14	.53	B21E222	.17	.68	B21F222
.0027	.14	.53	B21C272	.16	.53	B21E272	.17	.68	B21F272
.0033	.14	.53	B21C332	.17	.53	B21E332	.17	.68	B21F332
.0039	.14	.53	B21C392	.16	.68	B21E392	.19	.68	B21F392
.0047	.14	.53	B21C472	.17	.68	B21E472	.20	.68	B21F472
.0056	.14	.53	B21C562	.17	.68	B21E562	.19	.81	B21F562
.0068	.14	.53	B21C682	.17	.68	B21E682	.20	.81	B21F682
.0082	.16	.53	B21C822	.19	.68	B21E822	.23	.81	B21F822
.010	.17	.53	B21C103	.20	.68	B21E103	.24	.81	B21F103
.012	.17	.53	B21C123	.19	.81	B21E123	.25	.81	B21F123
.015	.17	.68	B21C153	.20	.81	B21E153	.25	.81	B21F153
.018	.19	.68	B21C183	.23	.81	B21E183	.30	.95	B21F183
.022	.20	.68	B21C223	.24	.81	B21E223	.31	.95	B21F223
.027	.21	.68	B21C273	.25	.81	B21E273	.32	.95	B21F273
.033	.22	.68	B21C333	.26	.81	B21E333	.32	.95	B21F333
.039	.22	.81	B21C393	.31	.95	B21E393	.36	.95	B21F393
.047	.23	.81	B21C473	.32	.95	B21E473	.39	.95	B21F473
.056	.24	.81	B21C563	.35	.95	B21E563	.44	1.17	B21F563
.068	.24	.81	B21C683	.37	.95	B21E683	.45	1.17	B21F683
.082	.25	.81	B21C823	.38	.95	B21E823	.48	1.17	B21F823
.10	.26	.81	B21C104	.39	.95	B21E104	.51	1.17	B21F104
.12	.31	.95	B21C124	.44	1.17	B21E124	.53	1.45	B21F124
.15	.32	.95	B21C154	.45	1.17	B21E154	.55	1.45	B21F154
.18	.34	.95	B21C184	.48	1.17	B21E184	.56	1.45	B21F184
.22	.35	.95	B21C224	.51	1.17	B21E224	.57	1.45	B21F224
.27	.37	1.17	B21C274	.50	1.45	B21E274	.67	1.68	B21F274
.33	.38	1.17	B21C334	.51	1.45	B21E334	.69	1.68	B21F334
.39	.42	1.17	B21C394	.56	1.68	B21E394	.74	1.95	B21F394
.47	.45	1.17	B21C474	.57	1.68	B21E474	.76	1.95	B21F474
.56	.48	1.17	B21C564	.63	1.95	B21E564			
.68	.51	1.17	B21C684	.64	1.95	B21E684			
.82	.50	1.45	B21C824	.70	1.95	B21E824			
1.0	.51	1.45	B21C105	.76	1.95	B21E105			
1.2	.58	1.45	B21C125						
1.5	.64	1.45	B21C155						
1.8	.74	1.68	B21C185						
2.0	.75	1.68	B21C205						

Add letter to the end of the part number to specify the tolerance.

- ±20% = M
- ±10% = K
- ±5% = J
- ±3% = H
- ±2% = G
- ±1% = F



Bishop Electronics Corporation

3729 San Gabriel River Parkway • Pico Rivera CA 90660
 (562) 695-0446 (562) 692-9391 FAX : (562) 692-4008
 email: Sales@bishopelectronics.com