

### Switch Modules – ESM & DSM

The single switch module ESM and the double switch module DSM are ready-to-install units, consisting of:

- Switches: K12 (for both ESM or DSM) K12G (DSM only with two switching-points) PVA1H4 (ESM only)
- PC board
- Rubber cap
- Optional cable or connector

The rubber cap offers the possibility to use both switch modules under severe ambient conditions where dust, water, oil, solvents etc. can effect or destroy the function of standard switches.

With the rubber cap the two modules are sealed to IP 65 when mounted.

#### **Typical Applications**

- Tractors
- Harvesting equipment
- Industrial controls




Technical Data						
Cap Material		Silicone rubber				
Protection Level		IP 65 (with cap when mounted)				
Cable		FLK/FLY 0.5 mm <sup>2</sup>				
Switches		K12G (D s'	oth ESM or DSM) DSM only, two witching-points) ESM only)			
	Operating force	Travel (mm/inch)	Life			
K12	5 N	1 / 0.039	3 million cycles			
K12G	3.5 / 7 N	1.5 / 0.0591	30K cycles			
PVA1H4	3 N	2.2 / 0.087	100K cycles			

Ordering code		1	2	3	4	5	6	7
	Example	DSM	K12	1	5N	С	L130	Pu Po
1 Designation	ESM = single switch module	t	t	Î	Î	Î	Î	Î
	DSM = double switch module							
2 Switch	K12 = (for ESM and DSM)							
	K12G = with 2 switching-points (DSM only)							
	PVA = PVA1H4 (ESM only)							
3 Travel of Switch	1 = 1 mm (K12)							
	1.5 = 1.5 mm (K12G)							
	2.2 = 2.2 mm (PVA1H4)							
4 Operating force	5N = 5 N (K12)							
	3.5N = 3.5 / 7 N (K12G)							
	3N = 3 N (PVA1H4)							
6 Cap	N = none							
	C = with cap							
7 Cable	- = none							
	L130 = 130 mm cable length							
8 Cap decals (DSM)*	- = none							
	P = arrows:							
	U (down), O (Up), L (left), R (right)							

\* see drawing overleaf

# DeltaTech Single & Double Switch Modules – ESM / DSM

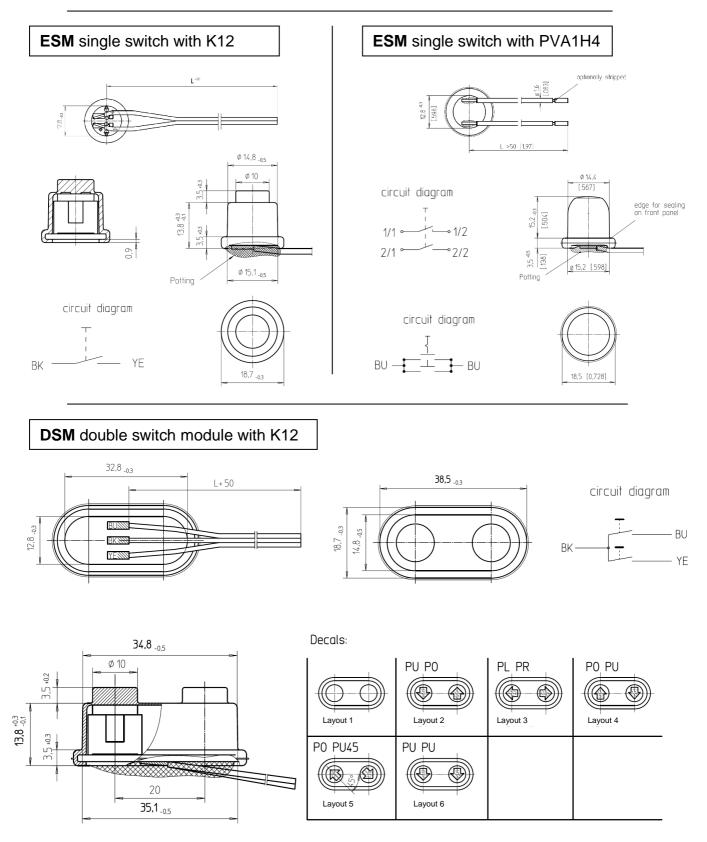

## DeltaTech Single & Double Switch Modules – ESM / DSM

**DeltaTech Controls** – A CoActive Technologies Company - **worldwide Facilities** With sales offices and manufacturing facilities located worldwide, please visit our website at www.deltatechcontrols.com for a complete listing and to find the office nearest to you.

#### France

2 Boulevard Michael Faraday Arlington Square, Batiment B Serris - F77716 Marne La Vallee Cedex 4 France phone: + 33 160 24 51 51 fax: + 33 3 84 69 08 97 Mail: sales.dtc.europe@coactive-tech.com

#### Germany

Holzhauser Strasse 26-32 D-13509 Berlin Germany phone: +49 30 43 999 0 fax: +49 30 43 999 203 Mail: sales.dtc.europe@coactive-tech.com

#### Hong Kong

Office:1007-8 10/F, Harcourt House 39 Gloucester Road Wanchai, Hong Kong phone: + 852 3713 5288 fax: + 852 2751 9926 Mail: sales.dtc.asia@coactive-tech.com

#### USA

5288 Valley Industrial Blvd. S Shakopee, MN 55379 USA phone: +1 952 403 7400 fax: +1 952 233 9707 Mail: sales.dtc.americas@coactive-tech.com DeltaTech

No information and data contained in this publication shall be construed to create any liability on the part of DeltaTech Controls GmbH. Any new issue of this publication shall automatically invalidate and supersede any and all previous issues. Dimensions are subject to change without prior notice.

All Copyrights belong to DeltaTech Controls GmbH and CoActive Technologies. All other trademarks or registered trademarks are property of their respective owners. All data subject to change without notice. ©2009