





The Electroswitch 500 Series Magnetic Encoders are built upon a contact free integrated circuit design. This encoder integrates Hall Effect sensing and digital signal processing to provide high-resolution angular measurement solutions.

An important advantage of the 500 Series is the dramatic reduction in package size to ½ inch, while still incorporating the performance and output options required to support the widest range of industrial and motion sensing applications.

The 500 Series design leverages its reduced part count and simplified construction to provide extremely robust, high shock and vibration resistant performance, excelling in harsh and dirty environments.

FEATURES

- Compact, Robust, 1/2" package
- High Resolution Encoding up to 1024 PPR
- > Widest Temperature Range
- Absolute and Incremental Outputs
- Zero Reference Positioning
- > Tachometer with Direction Sensing
- Quadrature Code Output
- RoHS Compliant
- Contact Free Magnetic Design
- > 3.3 or 5.0 VDC Options

BENEFITS


- Compact Size
- Multiple Output Codes Allow Simpler Integration With a Wider Variety of Receiving Devices
- > Best Encoder Reliability
 - Longest Life
 - Excellent Performance in Harsh Environments
- Low Power Consumption

AUDIO/ENTERTAINMENT APPLICATIONS Frequency Select for Professional and High End Audio Applications Mixing Consoles High End Amplifiers Lighting Controls (intensity select) MOTOR CONTROL DEVICES Control of motor circuits is accomplished by **AVIONICS** linking encoder to motor shaft Altitude Positioning Missile Firing and Guidance Material Handling Equipment In-flight Refueling Machine Tools Auto Pilot Controls Conveyor Belts Printing Equipment MEDICAL Elevators Infusion Pump Flow **Factory Automation Dispensing Equipment** Automated Vial Sampling Equipment FLOW CONTROL DEVICES **Dialysis Machines** Fluid flow can be metered by the encoder Ventilators attached to displacement turbine and other styles of meters and pumps INDUSTRIAL POSITION SENSING AND POSITION CONTROL Manufacturing Process Controls Off Road / Construction Equipment Valve and Flow controls Lift Trucks Fuel Pumps Welding Machines Electroswitch Electronic Products • 2010 Yonkers Road • Raleigh, North Carolina

T 888-768-2797 • F 800-909-9171 • www.electro-nc.com

41

Mechanical Drawings

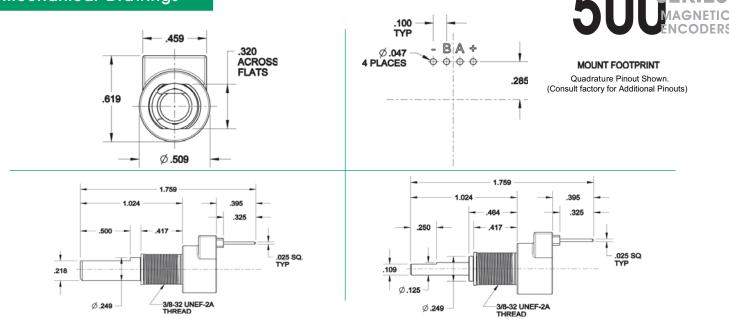

Specifications

	Electrical Specifications		Mechanical Specifications		
Operating Voltage Supply Current Logic output Power Consumpti	upply Current [30 mA Max]		<u>Mechanical Vibration</u> Harmonic motion with amplitude of 15g, varied from 10 to 2000 Hz for 12 hours, per MIL STD 202G Method 204D Condition B or Higher Mechanical Shock		
Codes: 32, 64, 128 or 256 PPR Tachometer 64, 128, 256, 512 PPR (w/ direction)		100g for 6 ms half sine wave with velocity change of 12.3 ft/s, per MIL STD 202G Method 213B Condition C or Higher			
Absolute Quadrature	10 bit PWM (1024 PPR) * 32, 64, 128 or 256 PPR w/ Z channel*		Life cycles:10M w/ sleeve bearingOperational speed:200 rpm max w/ sleeve bearingWeight:0.5 oz.		
Frequency [fixed] 1 μsEnvironmental SpecificationsOperation Temperature Storage Temperature Humidity-40C to +105C -55 C to +125C MIL STD 202G Method 103B Condition A or Higher		Materials:Housing:Zinc Die Cast AlloyShaft:Stainless SteelTerminal:Tin PlatedNOTE:Mounting Hardware IncludedStandard Sealing:Limited Dust and Water Ingress Protection			
rdering Info	ormation				
50	•				
	Output: Q = Quadrature	Resolution / PPR: Quadrature: 0032, 0	Sealing: 1064, S=Standard	Shaft Diam: 01 = .250	Termination: 0= Straight Pins
Voltage: 5= 5 VDC	T = Tachometer w/ direction	0128, 0256 Tachometer 0064, 0 0256, 0512 (Tachon	1128,	01 = .1250 02 = .125	0– ottangin i ins
	T = Tachometer w/ direction	0128, 0256 Tachometer 0064, 0	1128,		0– Shught i his

Example Part

505Q-0256-S010 = 500 Series Encoder, 5 volt, Quadrature, 256, no additional sealing, ¹/₄" diam. shaft, w/ straight pins *Additional Options: Contact Electroswitch for Lead-times and Minimum Order Requirements Customization can include: Modified Shaft Lengths and Flats - Cabling Options

