

## Hot Jacket Strippers


The HJS-02, HJS-03 and HJS-03-24 hot jacket strippers provide superior ribbon and field-ribbonized stripping performance. They conserve energy with a Power Save feature when the splicer is operated by battery power. A temperature selection switch provides easy field optimization for different fibers or operating conditions. An optional single-fiber adapter may be used to provide easy single-fiber capability for difficult-to-strip fibers. These strippers accept all Fujikura field and factory splicer designed fiber holders. The HJS-03 is a battery powered hot jacket stripper specifically designed for use with the SpliceMate fusion splicer but it can be used in other applications. The HJS-03-24 hot jacket stripper is designed for smooth and controlled stripping of 24-fiber ribbon.



HJS-02



HJS-03

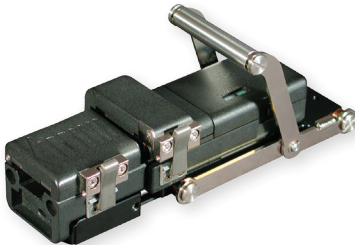

HJS-03-24 with Power Assist Tool

### Specifications

MODEL	HJS-02, HJS-03	HJS-03-24
Applicable Fiber Count	1 to 12 Fiber Ribbon	1 to 24 Fiber Ribbon
Ribbon Thickness	250µm to 400µm	250µm to 400µm
Stripping Length	35mm maximum	35mm maximum
Typical Heating Time	3 second Normal Mode 8 second Power Save Mode	3 second Normal Mode 30 second Power Save Mode
Standard Heating Temperature	100°C	100°C
Dimensions (W x D x H)	107mm x 40mm x 29mm	149mm x 58mm x 36mm
Weight	195g (0.43lb)	300g (0.66lb)
Power Supply	12VDC	12VDC
Operating Conditions	-10°C to 50°C	-10° C to 50°C
Storage Conditions	-40°C to 80°C	-40° C to 80°C

### Ordering Information

DESCRIPTION	AFL NO.
HJS-02 Hot Jacket Stripper (12 fibers max.)	S010340
HJS-02-80 Hot Jacket Stripper (80µm cladding)	S013264
HJS-03 Battery Powered Hot Jacket Stripper	S013996
HJS-03-24 Hot Jacket Stripper (24 fibers max.) with Power Assist Tool	S012960
HJS-03-24PA Power Assist Tool for HJS-03-24	S012964
ADC-09 AC Adapter (for HJS-02, HJS-03 and HJS-03-24)	S014389
ACC-09 AC Power Cord (for ADC-09)	S014390
SAD-01 Single Fiber Adapter for HJS-02	S010428
DCC-11 DC Power Cord for HJS-02/HJS-03 (for FSM-17R/50R/18R/60R)	S013852
DCC-03 DC Power Cord for HJS-02/HJS-03 (for FSM-30R/40R24)	S006126