



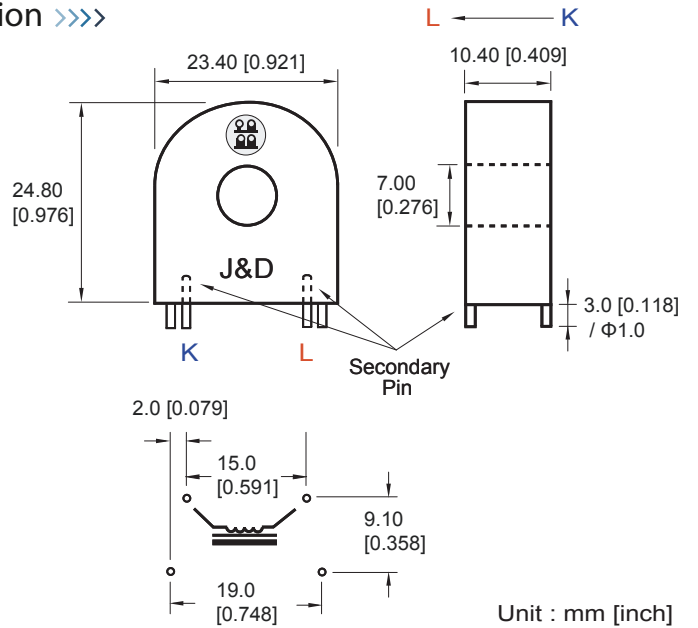

Current Transformer

JD315V


Dimension >>>

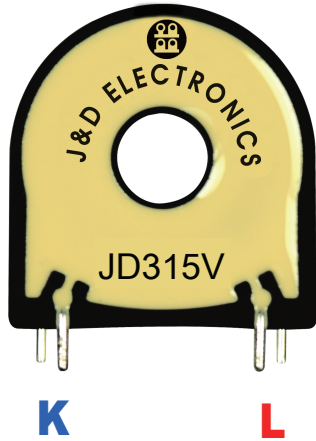

Accuracy conforms to IEC 61869-2,
meets the measuring range from 1 to 120 % of I_n

| Model | Primary Current Range | | Error | Turns Ratio | Characteristical Value | | | | | Terminal Structure | Inner Dia.Ø |
|--------|-----------------------|-------------|-------|-------------|-------------------------|-------|---------------------|--------------------|-----------------------|--------------------|-------------|
| | Rated Current | Max Current | | | I _{max} [Arms] | L [H] | R _{cu} [Ω] | R _B [Ω] | U _B [Vrms] | | |
| JD315V | 5/10/20 | 40 | 0.21 | 1:1500 | 6 | 56 | 50 | 20 | 0.08 | Pin | 7 |

>>> Output Voltage Data

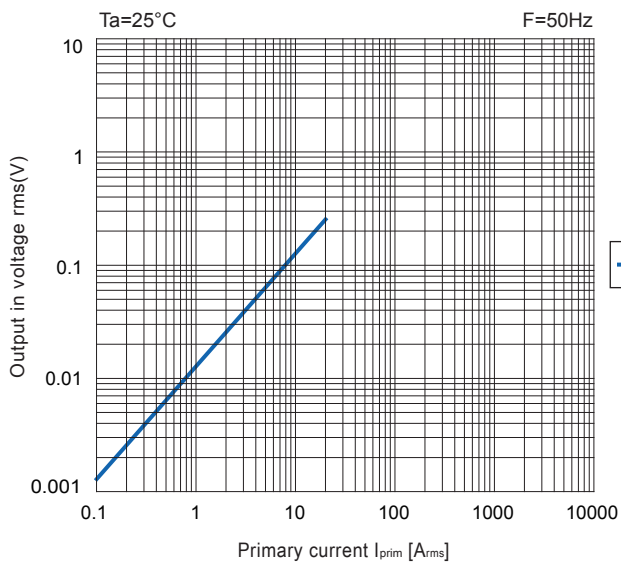

>>> Temperature Data

