




Without DC-Tolerance Current Transformer JP315W

ISO CT



Dimension >>>

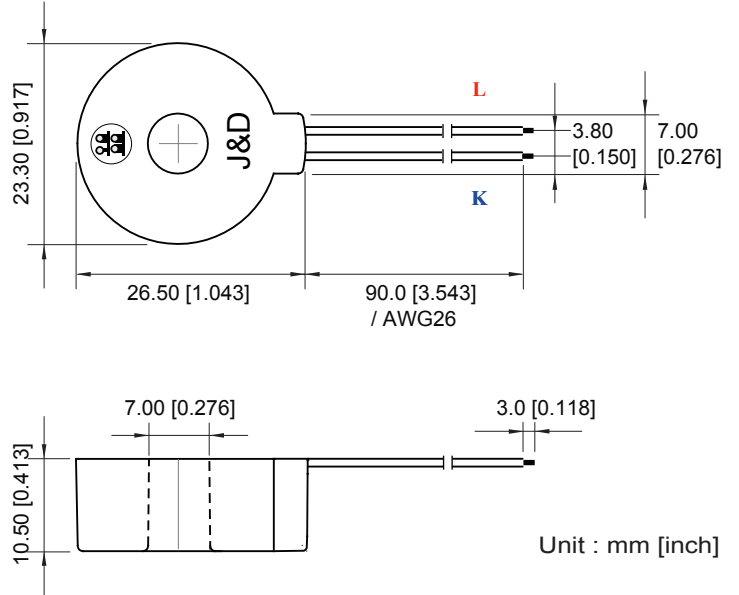


Unit : mm [inch]

Accuracy conforms to IEC 61869-2,
meets the measuring range from 1 to 120 % of I_n

Model	Primary Current Range		Error Phase $\phi(I)$ [°]	Turns Ratio	Characteristic Value					Terminal Structure	Inner Dia. ϕ
	Rated Current	Max Current			I _{max} [Arms]	L [H]	R _{cu} [Ω]	RB [Ω]	UB [Vrms]		
JP315W	5/10/20	30	0.12	1:1500	6	90	50	10	0.04	Wire	7

>>> Output Voltage Data

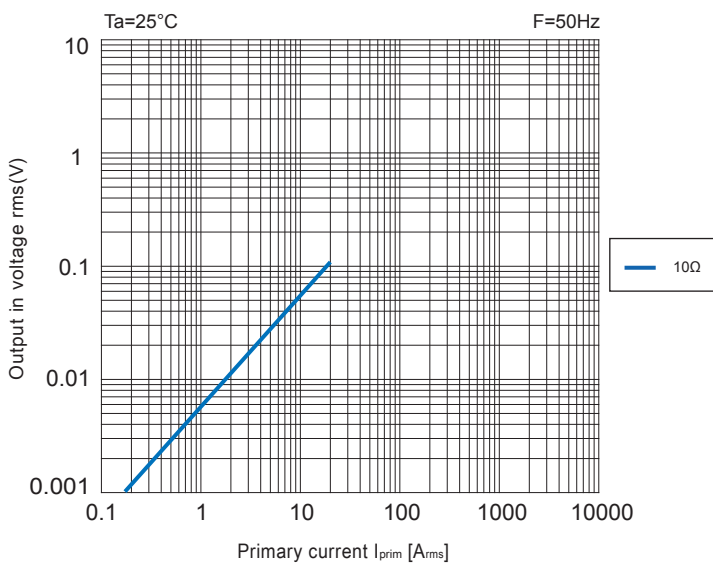

>>> Temperature Data

