





Without DC-Tolerance Current Transformer JN12V

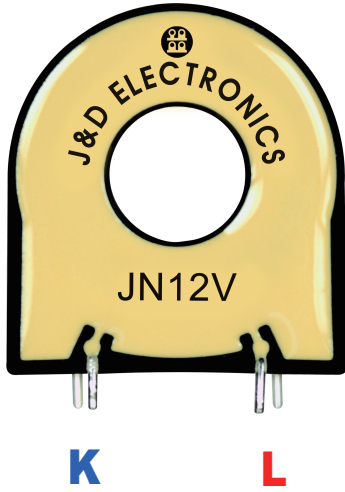


Dimension >>>

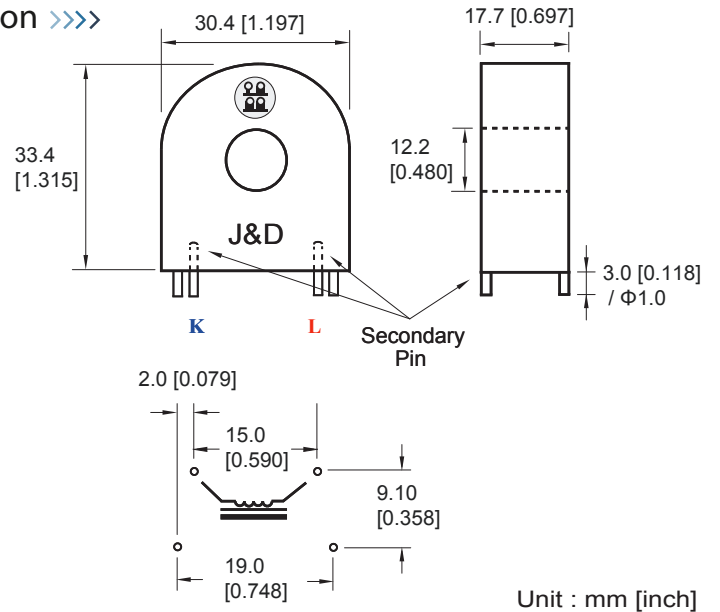

Accuracy conforms to IEC 61869-2,
meets the measuring range from 1 to 120 % of In

Model	Primary Current Range		Error Phase $\phi(I)$ [°]	Turns Ratio	Characteristic Value					Terminal Structure	Inner Dia. ϕ
	Rated Current	Max Current			I_{max} [Arms]	L [H]	Rcu [Ω]	RB [Ω]	UB [Vrms]		
JN12V	100/120	150	0.12	1:2500	60	260	150	7.5	0.18	Pin	12.2

>>> Output Voltage Data

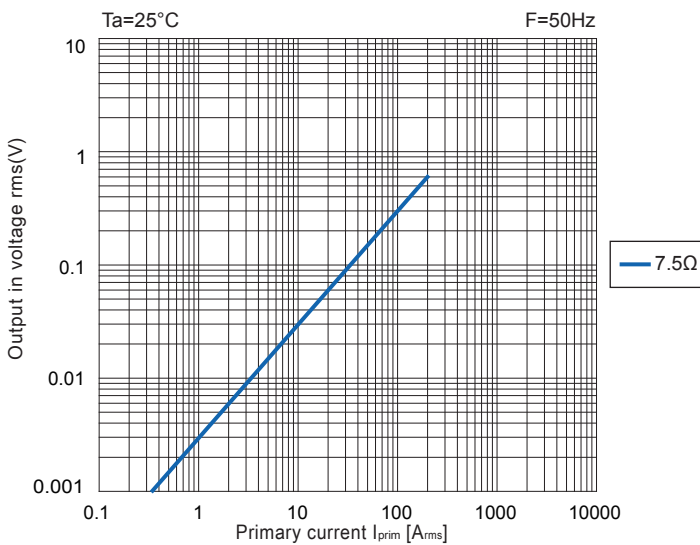

>>> Temperature Data

