




# Without DC-Tolerance Current Transformer JN315W

ISO CT




## Dimension >>>

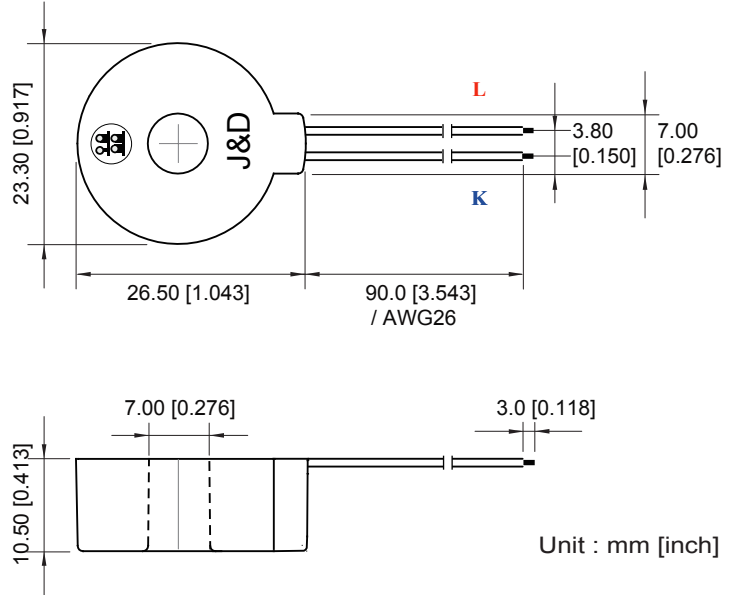

Accuracy conforms to IEC 61869-2  
meets the measuring range from 1 to 120 % of  $I_n$

Model	Primary Current Range		Error Phase $\phi(I)$ [°]	Turns Ratio	Characteristic Value					Terminal Structure	Inner Dia. $\phi$
	Rated Current	Max Current			$I_{max}$ [Arms]	L [H]	R <sub>cu</sub> [ $\Omega$ ]	R <sub>B</sub> [ $\Omega$ ]	U <sub>B</sub> [Vrms]		
JN315W	5/10/20	40	0.18	1:1500	6	70	50	20	0.08	Wire	7

## >>> Output Voltage Data

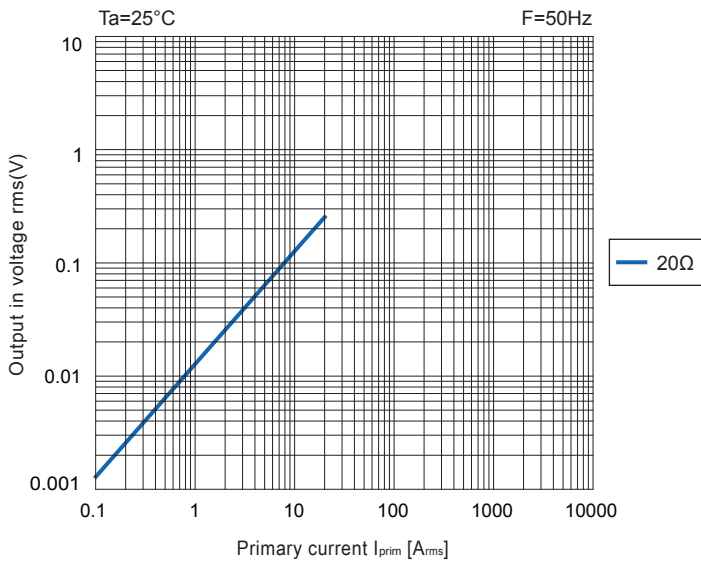

## >>> Temperature Data

