
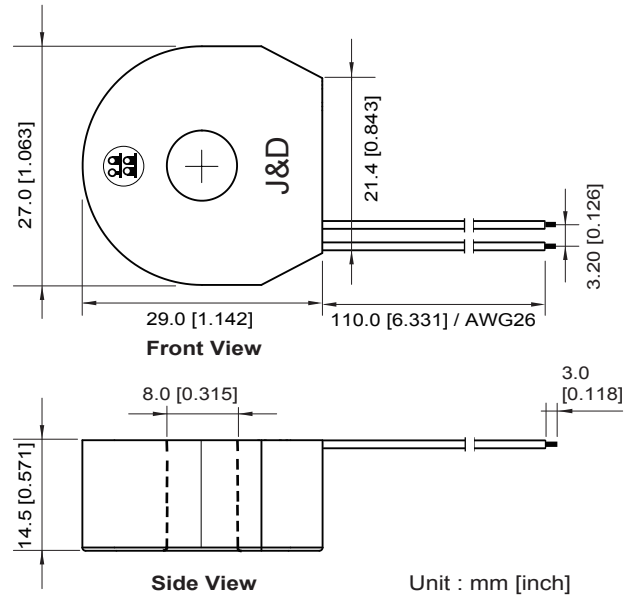


With DC-Tolerance Current Transformer JDTN40W


Dimension >>>

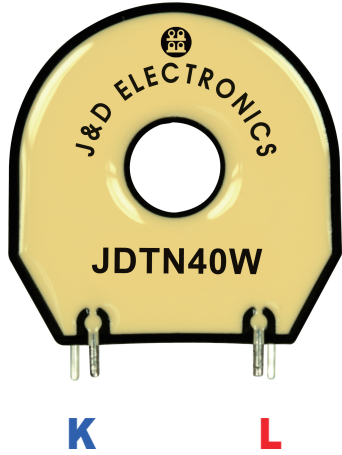

Accuracy conforms to IEC 61869-2,
meets the measuring range from 1 to 120 % of I_n

Model	Primary Current Range		Error Phase $\phi(I)$ [°]	Turns Ratio	Characteristical Value				Terminal Structure	Inner Dia. ϕ
	I _{max} [Arms]	I _{peak} [AOp]			L [H]	R _{cu} [Ω]	R _B [Ω]	U _B [Vrms]		
JDTN40W	40	40	3.96	1:2500	4.48	93	5	0.08	Wire	8

>>> Output Voltage Data

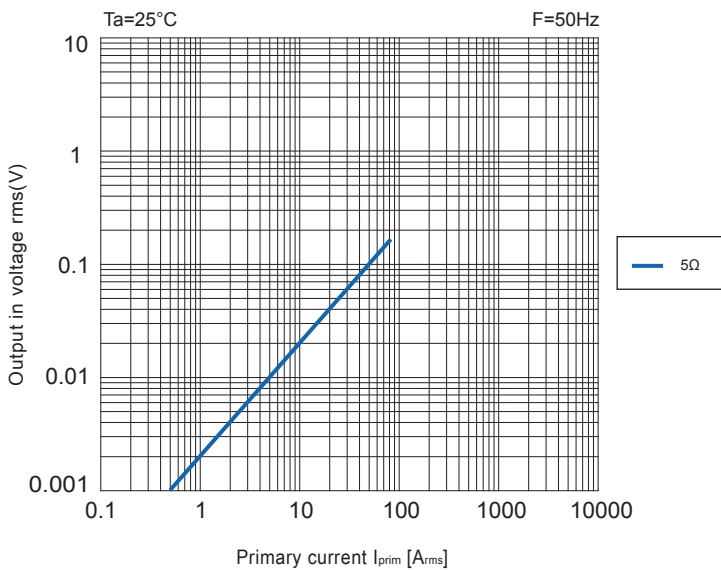

>>> Temperature Data

