




Current Transformer

JD51W

ISO CT



Dimension >>>>

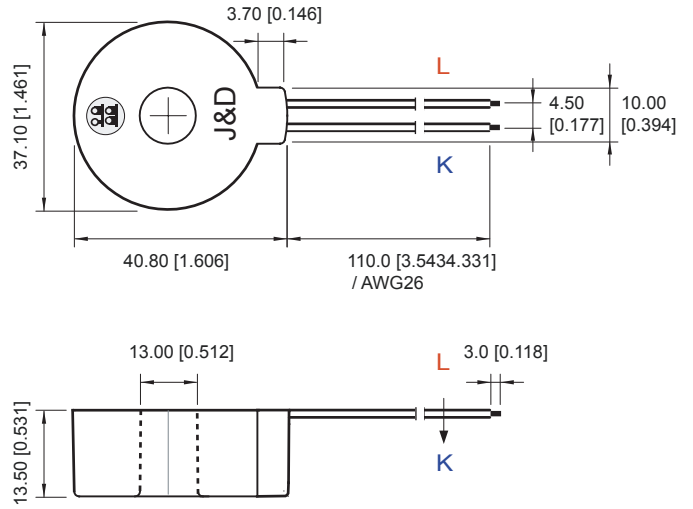


Unit : mm [inch]

Accuracy conforms to IEC 61869-2,
meets the measuring range from 1 to 120 % of I_n

Model	Primary Current Range		Error	Turns Ratio	Characteristic Value					Terminal Structure	Inner Dia.Ø
	Rated Current	Max Current			Phase Ø(l) [°]	I _{max} [Arms]	L [H]	R _{cu} [Ω]	R _B [Ω]		
JD51W	60/100	180	0.36	1:1000	60	17	20	5	0.3	Wire	13

>>>> Output Voltage Data

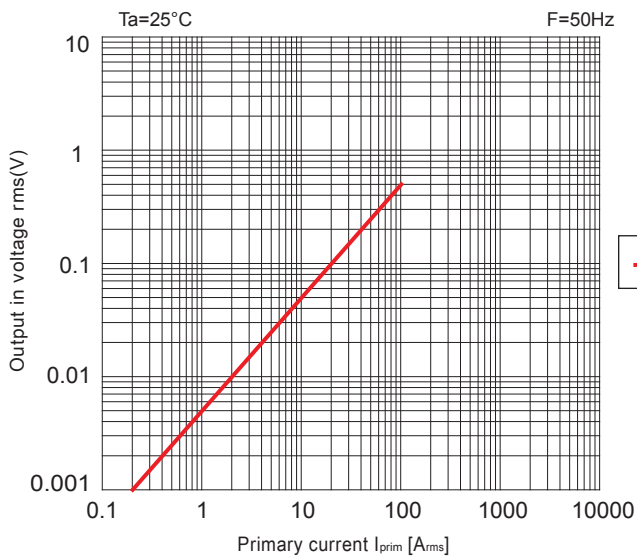

>>>> Temperature Data

