



ZBS-E001

Wireless Wall-Mount Scene Controller

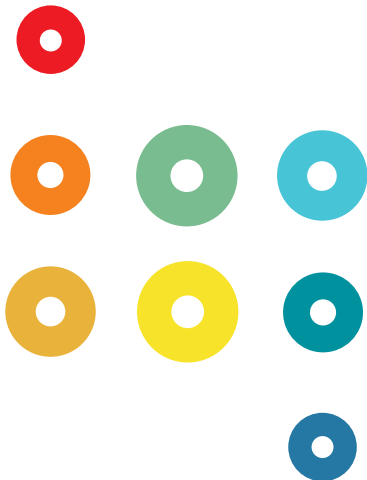

ZBS-E001 is the first of its kind to have wireless scene control along with dimming function. It fits in existing wall switch wiring box to make installation easy. It works seamlessly with ZGW-C01 and ZGW-A01 or any other ZigBee Gateways that are ZigBee H.A 1.2 compatible.

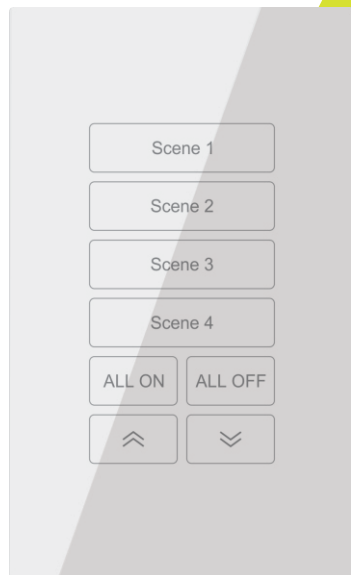

| Specifications | |
|-----------------------|--|
| Compatibility | Zigbee H.A 1.2 |
| Input | 110-264VAC/50-60Hz |
| Operating Environment | -20 to +65°C |
| Radio Properties | 2.4GHz +19.5dBm Transmit Power |
| Internal Antenna | Built-in |
| LED Indicators | Solid (In network) Flashing (Paring Mode) |
| Controls | 4 scene control button 2 button short press for On/Off ; Long press for dimming up and down |
| Dimensions | 120x72x36mm (LxWxH) |
| Warranty | 5 year |

Key Features:

- Zigbee H.A 1.2 compatible ; control lighting fixtures wirelessly
- Unique 6 button touch panel with LED back-lite
- Fit in standard wall switch junction box
- 100VAC – 264VAC full range input for no-worry installation
- High interoperability in compliant to global Zigbee standards
- Start-of-the-art algorithms providing seamless smooth dimming effect
- Easy commissioning, easy to use and easy to control
- Standard Zigbee OTA makes updating easy and current