

# TL7700 A Series

# SUPPLY VOLTAGE SUPERVISORS

- POWER-ON RESET GENERATOR
- AUTOMATIC RESET GENERATION AFTER VOLTAGE DROP
- WIDE SUPPLY VOLTAGE RANGE ... 3V TO 18V
- PRECISION VOLTAGE SENSOR
- TEMPERATURE-COMPENSATED VOLTAGE REFERENCE
- TRUE AND COMPLEMENT RESET OUTPUTS
- EXTERNALLY ADJUSTABLE PULSE WIDTH




The TL7700A series are monolithic integrated circuit supply voltage supervisors specifically desi-gned for use as reset controllers in microcomputer and microprocessor systems. During power-up the device tests the supply voltage and keeps the RESET and RESET outputs active (high and low, respectively) as long as the supply voltage has not reached its nominal voltage value. Taking RESIN low has the same effect. To ensure that the microcomputer system has reset, the TL7700A then initiates an internal time delay that delays the return of the reset outputs to their inactive states. Since the time delay for most microcomputers and microprocessors is in the order of several machine cycles, the device internal time delay is determined by an external time delay is determined by an external capacitor connected to the CT input (pin 3).

 $t_d = 1.3 \times 10^4 \times C_T$ 

Where :  $C_T$  is in farads (F) and  $t_d$  in seconds (s). In addition, when the supply voltage drops below the nominal value, the outputs will be active until the supply voltage returns to the nominal value. An external capacitor (typically 0.1  $\mu$ F) must be connected to the REF output (pin 1) to reduce the influence of fast transients in the supply voltage.


The TL7700Al series is characterized for operation from –  $25^{\circ}$ C to  $85^{\circ}$ C; the TL7700AC series is characterized from  $0^{\circ}$ C to  $70^{\circ}$ C.

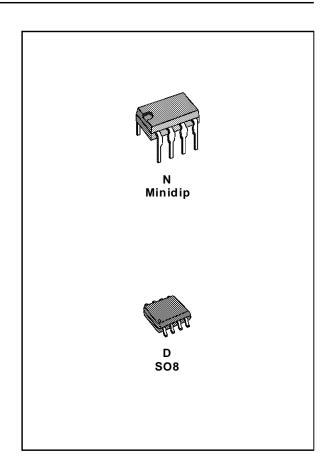

#### **ORDERING NUMBERS**


Temperature Range	Minidip	S08	
0 to 70°C	TL77XXACP	TL77XXACD	
-25 to 85°C	TL77XXAIP	TL77XXAID	

#### PIN CONNECTION (top view)

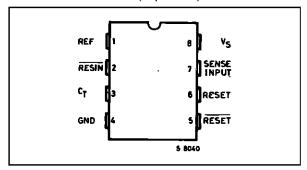

April 1993 1/7

## **BLOCK DIAGRAM**

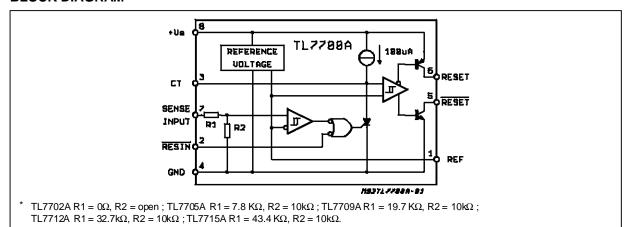

### **ABSOLUTE MAXIMUM RATINGS**

Symbol	Para	meter	Value	Unit
Vs	Supply Voltage, V <sub>CC</sub> - (see note 1	)	20	V
Vi	Input Voltage Range at RESIN		-0.3 to 20	V
Vi	Input Voltage at SENSE :	TL7702A (see note 2) TL7705A TL7709A TL7712A TL7715A	-0.3 to 6 -0.3 to 10 -0.3 to 15 -0.3 to 20 -0.3 to 20	V
Іон	High-level Output Current at RES	ET	-30	mA
I <sub>OL</sub>	Low-level Output Current at RESI	T	30	mA
T <sub>amb</sub>	Operating Free-air Temperature F	Range : TL77XXAI TL77XXAC	-25 to 85 0 to 70	°C
T <sub>stg</sub>	Storage Temperature Range		-65 to 150	°C

Notes: 1. All voltage values are with respect to the network ground terminal

#### THERMAL DATA

Symbol	Parameter		Value	Unit
R <sub>th j-amb</sub>	Thermal Resistance Junction-ambient	Max.	120	°C/W

## **RECOMMENDED OPERATING CONDITIONS**

Symbol	Parameter	Min.	Max.	Unit
Vs	Supply Voltage	3.6	18	V
$V_{IH}$	High-level Input Voltage at RESIN	2		V
V <sub>IL</sub>	Low-level Input Voltage at RESIN		0.6	V
Vi	Voltage at Sense Input TL7702A TL7705A TL7709A TL7712A TL7715A	0 0 0 0	See note 3 10 15 20 20	<b>V</b>
I <sub>OH</sub>	High-level Output Current at RESET		-16	mA
I <sub>OL</sub>	Low-level Output Current at RESET		16	mA
T <sub>amb</sub>	Operating Free-air Temperature Range TL77-AI TL77-AC	-25 0	85 70	°C

Note: 3. For proper operation of the TL7702A, the voltage applied to the SENSE terminal should not exceed V<sub>s</sub> - 1V or 6V, which ever is less.

<sup>2.</sup> For the TL7700A, the voltage applied to the SENSE terminal must never exceed V<sub>s</sub>.

# **ELECTRICAL CHARACTERISTICS** these specifications unless otherwise specified, apply for :

 $T_{amb} = -25 \text{ to } 85^{\circ}\text{C (TLXXAI)}, T_{amb} = 0 \text{ to } 70^{\circ}\text{C (TL77XXAC)}$ 

Symbol	Parameter		Test Conditions (1)	Min.	Тур.	Max.	Unit
Voн	High-level Output Voltage at RESET		I <sub>OH</sub> = -16mA	V <sub>s</sub> - 1.5			V
V <sub>OL</sub>	Low-Level Output Voltage at RESET		I <sub>OL</sub> = 16mA		0.4		V
$V_{ref}$	Reference Voltage		$T_{amb} = 25^{\circ}C$	2.48	2.53	2.58	V
VT	Threshold Voltage at SENSE Input	TL7702A TL7705A TL7709A TL7712A TL7715A	$V_s = 3.6V$ to 18V $T_{amb} = 25^{\circ}C$	2.48 4.5 7.5 10.6 13.2	2.53 4.55 7.6 10.8 13.5	2.58 4.6 7.7 11 13.8	V
V <sub>T</sub>	Threshold Voltage at SENSE Inpu	TL7702A TL7705A TL7709A TL7712A TL7715At	V <sub>s</sub> = 3.6V to 18V	2.45 4.45 7.4 10.4 13	2.53 4.55 7.6 10.8 13.5	2.58 4.6 7.7 11 13.8	V
V <sub>T+</sub> , V <sub>T-</sub>	Hysteresis (2) at SENSE Input	TL7702A TL7705A TL7709A TL7712A TL7715A	$V_s = 3.6V \text{ to } 18V$ $T_{amb} = 25^{\circ}C$		10 15 20 35 45		mV
II	Input Current at RESIN Input		$V_i = 2.4V \text{ to } V_S$ $V_i = 0.4V$		20 -100		μΑ
l <sub>l</sub>	Input Current at SENSE Input	TL7702A	$V_{ref} < V_i < V_s - 1.5V$		0.5	2	μΑ
Іон	High-level Output Current at RESET		V <sub>O</sub> = 18V		50		μΑ
loL	Low-level Output Current at RESET		$V_O = 0V$		-50		μΑ
Is	Supply Current		All Inputs and out. open		1.8	3.3	mA

### **SWITCHING CHARACTERISTICS**

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
t <sub>pi</sub>	Pulse Width at SENSE Input	$V_{ih} = V_{ityp} +0.04 \times V_i$ $V_{iL} = V_{ityp} -0.04 \times V_i$	0.9			μs
t <sub>pi</sub>	Pulse Width at RESIN Input		0.4			μs
t <sub>po</sub>	Pulse Width at Output	$C_f = 0.1 \mu F$	0.65	1.3	2.6	ms
t <sub>pdHL</sub>	Propagation Delay Time from RESIN to RESET	$C_L = 100 pF, V_S = 5V, R_L = 4.7 k\Omega$			1	μs
t <sub>r/f</sub>	Rise/Falltime at RESET and RESET	$C_L = 10 pF, V_s = 5V, R_L = 4.7 k\Omega$			1	μs

Notes: 1. All characteristics are measured with C = 0.1μF from Pin 1 to GND, and with C = 0.1μF from Pin 3 to GND.
2. Hysteresis is the difference between the positive going input threshold voltage. V<sub>T+</sub>, and the negative going input threshold voltage, V<sub>T-</sub>.

Figure 1: Multiple Power Supply System Reset Generation



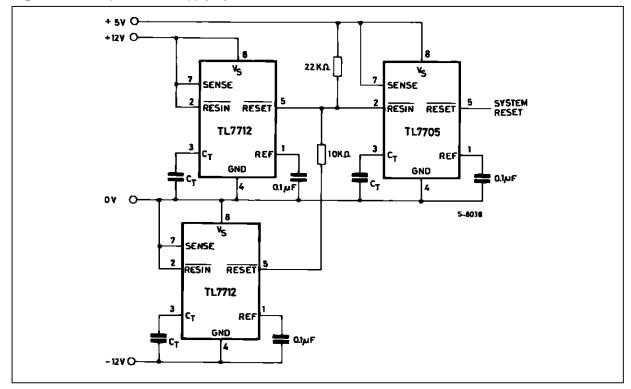


Figure 2: Reset Controller for μP

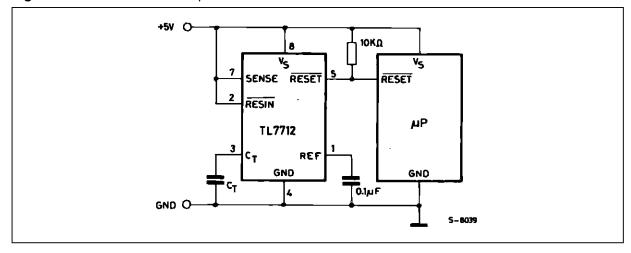


# **SO8 PACKAGE MECHANICAL DATA**

DIM.		mm			inch			
Divi.	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.		
Α			1.75			0.069		
a1	0.1		0.25	0.004		0.010		
a2			1.65			0.065		
аЗ	0.65		0.85	0.026		0.033		
b	0.35		0.48	0.014		0.019		
b1	0.19		0.25	0.007		0.010		
С	0.25		0.5	0.010		0.020		
c1			45°	(typ.)		•		
D	4.8		5.0	0.189		0.197		
E	5.8		6.2	0.228		0.244		
е		1.27			0.050			
e3		3.81			0.150			
F	3.8		4.0	0.15		0.157		
L	0.4		1.27	0.016		0.050		
М			0.6			0.024		
S		8° (max.)						

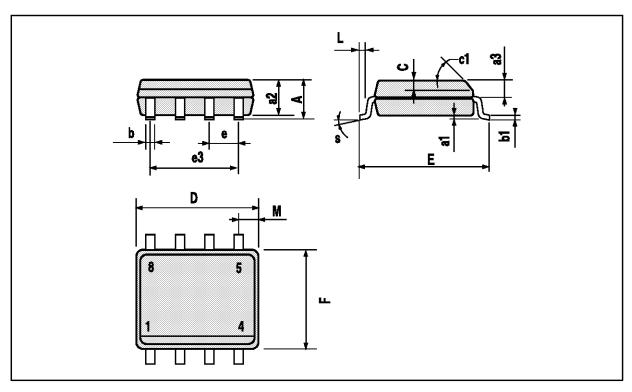

# MINIDIP PACKAGE MECHANICAL DATA

DIM.	mm			inch			
Dim.	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
А		3.32			0.131		
a1	0.51			0.020			
В	1.15		1.65	0.045		0.065	
b	0.356		0.55	0.014		0.022	
b1	0.204		0.304	0.008		0.012	
D			10.92			0.430	
E	7.95		9.75	0.313		0.384	
е		2.54			0.100		
e3		7.62			0.300		
e4		7.62			0.300		
F			6.6			0.260	
I			5.08			0.200	
L	3.18		3.81	0.125		0.150	
Z			1.52			0.060	

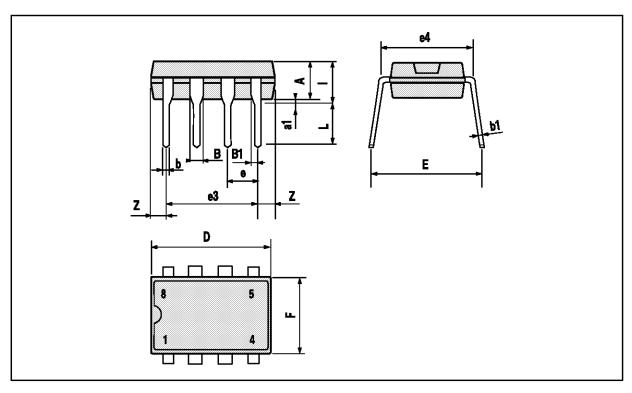

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thaliand - United Kingdom - U.S.A.

