

Easy to spec. Easy to install.

AMP NETCONNECT Optical Fiber Management Systems enable designers, installers and distributors to install, order and stock a complete connectivity solution for optical fiber cabling,

Rack Mount Enclosures


Back



2U, Shown loaded with 6-fiber duplex SC adaptor plates (not included)




Front



Back

3U, Shown loaded with MT-RJ snap-in adapter plates (not included)

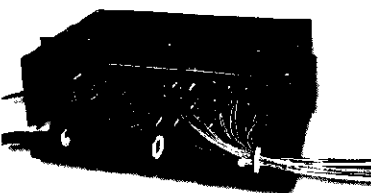

4U, Shown loaded with 6 fiber ST-Style adapter plates (not included)



Rack Mount Enclosure
Holds up to 4 six-port modular jack modules, up to 3 snap-in 1435040-1 adapter plates or 3 fiber cassettes

- Accepts four (2U), eight (3U), or 12 (4U) snap-in adapter plates or MPO Cassettes
- Removable back cover for easy installation
- 2U and 3U have cable strain relief brackets in back, 4U has reversible cable strain relief brackets
- Front and rear cable management rings
- Edge guard on front and rear cable entries
- Fits standard 19-inch and 23-inch racks
- Available Retrofit Kit includes a replacement front metal door with lock and an additional lock for the rear door

Rack Mount Enclosures

Description	Part Number
2U, Unloaded with Plastic Front Door	559542-2
3U, Unloaded with Plastic Front Door	559614-2
3U, Retrofit Kit with Locks	1435187-X
4U, Unloaded with Plastic Front Door	559552-2
4U, Retrofit Kit with Locks	1435161-X
1U, Drawer-Style (holds 3 cassettes)	1435040-1
1U, Universal Fiber/Copper	1435040-1

X denotes: -1 = Almond, -2 = Black

Insert Type	Fiber Density	Duplex Port Density
	2U/3U/4U	2U/3U/4U
ST-Style Adapter Plate, 6-Fiber	24/48/72	12/24/36
ST-Style Adapter Plate, 12-Fiber	48/96/144	24/48/72
SC Adapter Plate, 6-Fiber	24/48/72	12/24/36
SC Adapter Plate, 12-Fiber	48/96/144	24/48/72
MT-RJ Adapter Plate, 12-Fiber	48/96/144	24/48/72
ST-Style to MPO Cassette, 12-Fiber	48/96/144	12/48/72
SC to MPO Cassette, 12-Fiber	48/96/144	12/48/72
MT-RJ to MPO Cassettes, 12-Fiber	48/96/144	12/48/72
MT-RJ to MPO Cassettes, 24-Fiber	96/192/288	48/96/144

MT-RJ Snap-In Adapter Plate



- Holds up to six MT-RJ Patch Panel Jacks or singlemode jack assemblies (sold separately)
- Fits AMP NETCONNECT Fiber Optic Enclosures

Description	Part Number
MT-RJ Snap-In Adapter Plate, 12-Fiber	1278328-3