

August 1989 Revised August 2000

#### 100302

## Low Power Quint 2-Input OR/NOR Gate

#### **General Description**

The 100302 is a monolithic quint 2-input OR/NOR gate with common enable. All inputs have 50 k $\Omega$  pull-down resistors and all outputs are buffered.

#### **Features**

- 43% power reduction of the 100102
- 2000V ESD protection
- Pin/function compatible with 100102
- Voltage compensated operating range = -4.2V to -5.7V
- Available to industrial grade temperature range (PLCC package only)


#### **Ordering Code:**

Order Number	Package Number	Package Description
100302SC	M24B	24-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-013, 0.300 Wide
100302PC	N24E	24-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-010, 0.400 Wide
100302QC	V28A	28-Lead Plastic Lead Chip Carrier (PLCC), JEDEC MO-047, 0.450 Square
100302QI		28-Lead Plastic Lead Chip Carrier (PLCC), JEDEC MO-047, 0.450 Square Industrial Temperature Range (-40°C to +85°C)

Devices also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

#### **Connection Diagrams**






#### **Pin Descriptions**

Pin Names	Description
D <sub>na</sub> -D <sub>ne</sub>	Data Inputs
E	Enable Input
O <sub>a</sub> -O <sub>e</sub>	Data Outputs
$\overline{O}_a$ - $\overline{O}_e$	Complementary Data Outputs

## Logic Symbol



### **Truth Table**

D <sub>1X</sub>	D <sub>2X</sub>	E	o <sub>x</sub>	ō <sub>x</sub>
L	L	L	L	Н
L	L	Н	Н	L
L	Н	L	Н	L
L	Н	Н	Н	L
Н	L	L	Н	L
Н	L	Н	Н	L
Н	Н	L	Н	L
Н	Н	Н	Н	L

H = HIGH Voltage Level

L = LOW Voltage Level

#### **Absolute Maximum Ratings**(Note 1)

## Recommended Operating Conditions

Case Temperature (T<sub>C</sub>)

 $\begin{array}{lll} \mbox{Commercial} & 0^{\circ}\mbox{C to } +85^{\circ}\mbox{C} \\ \mbox{Industrial} & -40^{\circ}\mbox{C to } +85^{\circ}\mbox{C} \\ \mbox{Supply Voltage (V_{EE})} & -5.7\mbox{V to } -4.2\mbox{V} \end{array}$ 

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum rating. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 2: ESD testing conforms to MIL-STD-883, Method 3015.

#### **Commercial Version**

#### **DC Electrical Characteristics** (Note 3)

 $V_{EE} = -4.2V$  to -5.7V,  $V_{CC} = V_{CCA} = GND$ ,  $T_{C} = 0$ °C to +85°C

Symbol	Parameter	Min	Тур	Max	Units	Conditions		
V <sub>OH</sub>	Output HIGH Voltage	-1025	-955	-870	mV	$V_{IN} = V_{IH(Max)}$ or $V_{IL(Min)}$	Loading with	
V <sub>OL</sub>	Output LOW Voltage	-1830	-1705	-1620	mV	VIN - VIH(Max) OI VIL(Min)	50Ω to −2.0V	
V <sub>OHC</sub>	Output HIGH Voltage	-1035			mV	$V_{IN} = V_{IH(Min)}$ or $V_{IL(Max)}$	Loading with	
V <sub>OLC</sub>	Output LOW Voltage			-1610	mV	VIN - VIH(Min) Of VIL(Max)	50Ω to –2.0V	
V <sub>IH</sub>	Input HIGH Voltage	-1165		-870	mV	Guaranteed HIGH Signal for All Inputs		
V <sub>IL</sub>	Input LOW Voltage	-1830		-1475	mV	Guaranteed LOW Signal for All Inputs		
I <sub>IL</sub>	Input LOW Current	0.50			μΑ	$V_{IN} = V_{IL(Min)}$		
I <sub>IH</sub>	Input HIGH Current			240	μΑ	$V_{IN} = V_{IH(Max)}$		
I <sub>EE</sub>	Power Supply Current	-45	-36	-20	mA	Inputs OPEN		

**Note 3:** The specified limits represent the "worst case" value for the parameter. Since these values normally occur at the temperature extremes, additional noise immunity and guardbanding can be achieved by decreasing the allowable system operating ranges. Conditions for testing shown in the tables are chosen to guarantee operation under "worst case" conditions.

#### **DIP AC Electrical Characteristics**

 $\rm V_{EE} = -4.2V$  to  $-5.7V,~V_{CC} = V_{CCA} = GND$ 

Symbol	Parameter	$T_C = 0^{\circ}C$		$T_C = +25^{\circ}C$		T <sub>C</sub> = +85°C		Units	Conditions
- Cymbol		Min	Max	Min	Max	Min	Max	0	Conditions
t <sub>PLH</sub>	Propagation Delay	0.50	1.15	0.50	1.15	0.50	1.25	ns	
t <sub>PHL</sub>	Data to Output	0.50	1.15	0.50	1.15	0.50	1.25	115	Figures 1, 2
t <sub>PLH</sub>	Propagation Delay	0.70	1.90	0.70	1.90	0.80	2.00	ns	(Note 4)
t <sub>PHL</sub>	Enable to Output	0.70	1.50	0.70	1.50	0.00	2.00	110	
t <sub>TLH</sub>	Transition Time	0.40	1.20	0.40	1.20	0.40	1.20	ns	Figures 1, 2
t <sub>THL</sub>	20% to 80%, 80% to 20%	0.40	1.20	0.40	1.20	0.40	1.20	115	i iguies i, Z

Note 4: The propagation delay specified is for single output switching. Delays may vary up to 100 ps with multiple outputs switching.

# Commercial Version (Continued) SOIC and PLCC AC Electrical Characteristics

 $V_{EE} = -4.2V$  to -5.7V,  $V_{CC} = V_{CCA} = GND$ 

Symbol	Parameter	T <sub>C</sub> = 0°C		$T_C = +25^{\circ}C$		$T_C = +85^{\circ}C$		Units	Conditions	
Syllibol		Min	Max	Min	Max	Min	Max	Ullits	Conditions	
t <sub>PLH</sub>	Propagation Delay	0.50	1.05	0.50	1.05	0.50	1.15			
t <sub>PHL</sub>	Data to Output	0.50	1.05	0.50	1.05	0.50	1.15	ns	Figures 1, 2	
t <sub>PLH</sub>	Propagation Delay	0.70	1.80	0.70	1.80	0.80	1.90	200	(Note 5)	
t <sub>PHL</sub>	Enable to Output	0.70	1.00	0.70	1.00	0.60	1.90	ns		
t <sub>TLH</sub>	Transition Time	0.40	1.10	0.40	1.10	0.40	1.10	ns	Figures 1, 2	
t <sub>THL</sub>	20% to 80%, 80% to 20%	0.40	1.10	0.40	1.10	0.40	1.10	115	rigules 1, 2	
t <sub>OSHL</sub>	Maximum Skew Common Edge								PLCC Only	
	Output-to-Output Variation		250		250		250	ps	(Note 6)	
	Data to Output Path									
t <sub>OSHL</sub>	Maximum Skew Common Edge								PLCC Only	
	Output-to-Output Variation		310		310		310	ps	(Note 6)	
	Enable to Output Path									
t <sub>OSLH</sub>	Maximum Skew Common Edge								PLCC Only	
	Output-to-Output Variation		200		200		200	ps	(Note 6)	
	Data to Output Path									
t <sub>OSLH</sub>	Maximum Skew Common Edge								PLCC Only	
	Output-to-Output Variation		330		330		330	ps	(Note 6)	
	Enable to Output Path									
t <sub>OST</sub>	Maximum Skew Opposite Edge								PLCC Only	
	Output-to-Output Variation		250		250		250	ps	(Note 6)	
	Data to Output Path									
t <sub>OST</sub>	Maximum Skew Opposite Edge								PLCC Only	
	Output-to-Output Variation		330		330		330	ps	((Note 6)	
	Enable to Output Path									
t <sub>PS</sub>	Maximum Skew								PLCC Only	
	Pin (Signal) Transition Variation		200		200		200	ps	(Note 6)	
	Data to Output Path									
t <sub>PS</sub>	Maximum Skew								PLCC Only	
	Pin (Signal) Transition Variation		280		280		280	ps	(Note 6)	
	Enable to Output Path									

Note 5: The propagation delay specified is for single output switching. Delays may vary up to 100 ps with multiple outputs switching.

Note 6: Output-to-Output Skew is defined as the absolute value of the difference between the actual propagation delay for any outputs within the same packaged device. The specifications apply to any outputs switching in the same direction either HIGH-to-LOW (t<sub>OSHL</sub>), or LOW-to-HIGH (t<sub>OSLH</sub>), or in opposite directions both HL and LH (t<sub>OST</sub>). Parameters t<sub>OST</sub> and t<sub>PS</sub> guaranteed by design.

#### **Industrial Version**

#### PLCC DC Electrical Characteristics (Note 7)

 $V_{EE} = -4.2 V$  to -5.7 V,  $V_{CC} = V_{CCA} = GND$ ,  $T_{C} = -40 ^{\circ} C$  to  $+85 ^{\circ} C$ 

Symbol	Parameter	$T_C = -40^{\circ}C$ $T_C = 0^{\circ}C \text{ to } +85^{\circ}C$		Units	Conditions			
Cymbol	r arameter	Min	Max	Min	Max	Omits	Conditions	•
V <sub>OH</sub>	Output HIGH Voltage	-1085	-870	-1025	-870	mV	$V_{IN} = V_{IH(Max)}$	Loading with
V <sub>OL</sub>	Output LOW Voltage	-1830	-1575	-1830	-1620	1110	or V <sub>IL(Min)</sub>	$50\Omega$ to $-2.0V$
V <sub>OHC</sub>	Output HIGH Voltage	-1095		-1035		mV	$V_{IN} = V_{IH(Min)}$	Loading with
V <sub>OLC</sub>	Output LOW Voltage		-1565		-1610	IIIV	or V <sub>IL(Max)</sub>	$50\Omega$ to $-2.0V$
V <sub>IH</sub>	Input HIGH Voltage	-1170	-870	-1165	-870	mV	Guaranteed HIGH Signal for	or ALL Inputs
V <sub>IL</sub>	Input LOW Voltage	-1830	-1480	-1830	-1475	mV	Guaranteed LOW Signal for	or ALL Inputs
I <sub>IL</sub>	Input LOW Current	0.05		0.05		μΑ	$V_{IN} = V_{IL(Min)}$	
I <sub>IH</sub>	Input HIGH Current		300		240	μΑ	$V_{IN} = V_{IH(Max)}$	
I <sub>EE</sub>	Power Supply Current	-45	-20	-45	-20	mA	Inputs OPEN	

Note 7: The specified limits represent the "worst case" value for the parameter. Since these values normally occur at the temperature extremes, additional noise immunity and guardbanding can be achieved by decreasing the allowable system operating ranges. Conditions for testing shown in the tables are chosen to guarantee operation under the "worst case" conditions.


#### **PLCC AC Electrical Characteristics**

 $V_{EE} = -4.2V$  to -5.7V,  $V_{CC} = V_{CCA} = GND$ 

Symbol	Parameter	$T_C = -40^{\circ}C$		T <sub>C</sub> = +25°C		$T_C = +85^{\circ}C$		Units	Conditions
Oyboi	T didilictor	Min	Max	Min	Max	Min	Max	Oille	Conditions
t <sub>PLH</sub>	Propagation Delay	0.40	1.05	0.50	1.05	0.50	1.15	ns	
t <sub>PHL</sub>	Data to Output	0.40	1.00	0.50	1.00	0.50	1.15	113	Figures 1, 2
t <sub>PLH</sub>	Propagation Delay	0.70	1.80	0.70	1.80	0.80	1.90	ns	(Note 8)
t <sub>PHL</sub>	Enable to Output	0.70	1.00	0.70	1.00	0.00	1.90	115	
t <sub>TLH</sub>	Transition Time	0.30	1.10	0.40	1.10	0.40	1.10	ns	Figures 1, 2
t <sub>THL</sub>	20% to 80%, 80% to 20%	0.50	1.10	0.40	1.10	0.40	1.10	115	1 igui 65 1, 2

Note 8: The propagation delay specified is for single output switching. Delays may vary up to 200 ps with multiple outputs switching.

## **Test Circuitry**



#### Notes:

 $V_{CC},\,V_{CCA}=+2V,\,V_{EE}=-2.5V$ 

L1 and L2 = equal length  $50\Omega$  impedance lines

 $R_T = 50\Omega$  terminator internal to scope

Decoupling 0.1  $\mu\text{F}$  from GND to  $\text{V}_{\text{CC}}$  and  $\text{V}_{\text{EE}}$ 

All unused outputs are loaded with  $50\Omega$  to GND

 $C_L = \mbox{Fixture}$  and stray capacitance  $\leq 3 \mbox{ pF}$ 

#### FIGURE 1. AC Test Circuit

## **Switching Waveforms**






FIGURE 2. Propagation Delay and Transition Times

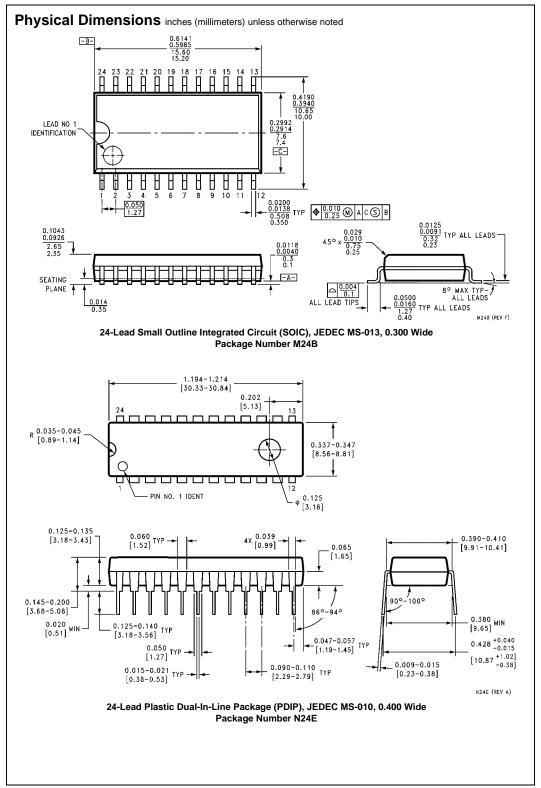

#### Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

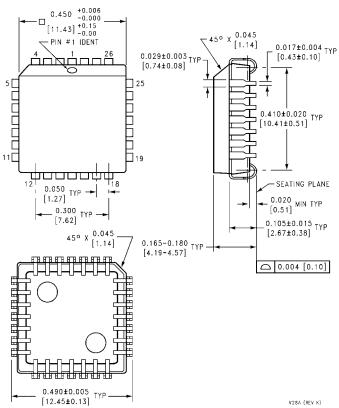

28-Lead Plastic Lead Chip Carrier (PLCC), JEDEC MO-047, 0.450 Square Package Number V28A

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com