

One Technology Way • P.O. Box 9106 • Norwood, MA 02062-9106, U.S.A. • Tel: 781.329.4700 • Fax: 781.461.3113 • www.analog.com

Evaluation Board for Dual High Speed Differential Amplifiers

FEATURES

Enables quick breadboarding/prototyping User defined circuit configuration Edge mounted SMA connector provisions Easy connection to test equipment and other circuits Two independent circuits enhance flexibility

GENERAL DESCRIPTION


The EVAL-FDA-2CPZ-24 is designed to aid in the evaluation of dual high speed differential amplifiers. The EVAL-FDA-2CPZ-24 is a bare board (that is, there are no components soldered to the evaluation board) that enables users to quickly prototype a variety of differential amplifier circuits, which minimizes risk and reduces time to market. The EVAL-FDA-2CPZ-24 evaluation board supports any of the Analog Devices, Inc., dual high speed differential amplifiers in 4 mm × 4 mm, lead frame chip scale packages (LFCSP).

Figure 1 shows the component side and circuit side of the evaluation board. Figure 2 shows the evaluation board schematic.

The 4-layer evaluation board accepts edge mounted subminiture version A (SMA) connectors on both inputs and outputs, which allows efficient and quick connection to test equipment or other circuitry.

The evaluation board ground plane, component placement, and power supply bypassing are optimized for maximum circuit flexibility and performance. The evaluation board uses a variety of surface-mount technology (SMT) component case sizes: 0402, 0508, and 7343.

Figure 3 and Figure 5 show the evaluation board assembly drawings. Figure 4 and Figure 6 show the metal layout pattern for connecting the board to the operational amplifier and to the supporting circuitry.

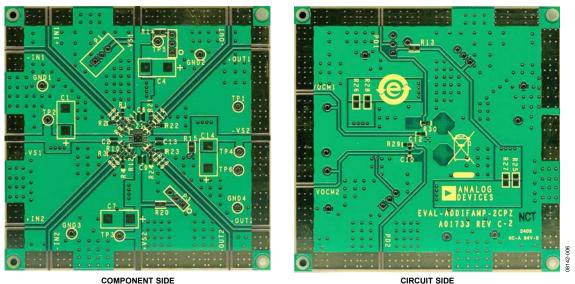

DIGITAL PICTURE OF THE EVALUATION BOARD

NOTES

1. THE EVALUATION BOARD SILKSCREEN PART NUMBER LABELING ON YOUR BOARD MAY BE DIFFERENT FROM WHAT IS SHOWN HERE. Figure 1. Component and Circuit Side of PCB

EVAL-FDA-2CPZ-24 User Guide

TABLE OF CONTENTS

Features	1
General Description	1
Digital Picture of the Evaluation Board	1
Revision History	2

REVISION HISTORY

8/2016—Rev. B to Rev. C
Changed EB-D24CP44-2Z to EVAL-FDA-2CPZ-24 Throughout
Changes to Table 1 5

1/2015-Rev. A to Rev. B


Changes to General Description Section1
Added Ordering Information Section and Table 1 5

2/2010—Rev. 0 to Rev. A Changes to General Description and Figure 1 1

7/2009—Revision 0: Initial Version

Evaluation Board Schematic and Artwork	3
Ordering Information	5
Bill of Materials5	5

EVALUATION BOARD SCHEMATIC AND ARTWORK

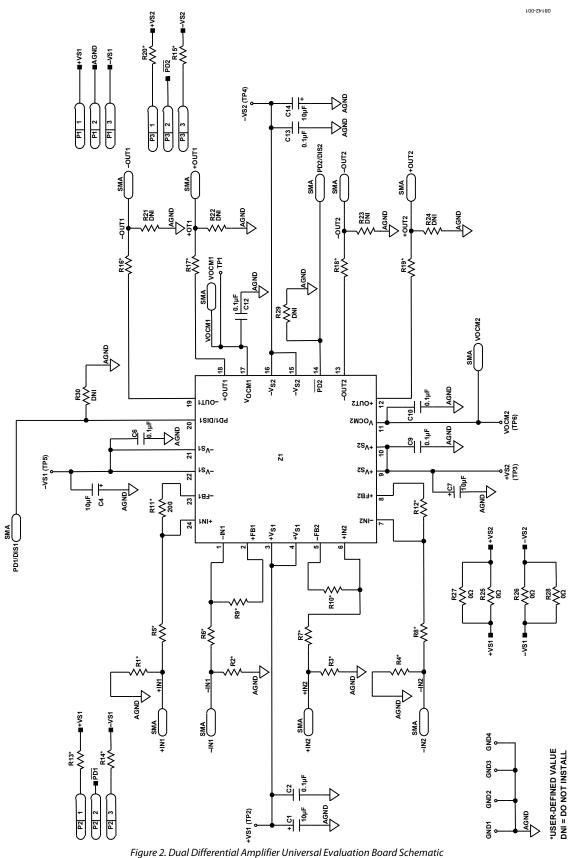

Rev. C | Page 3 of 5

UG-018

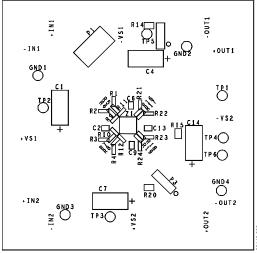


Figure 3. Board Assembly Drawing, Component Side

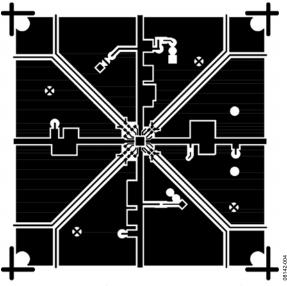


Figure 4. Board Layout Pattern, Component Side

EVAL-FDA-2CPZ-24 User Guide

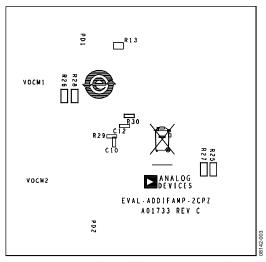


Figure 5. Board Assembly Drawing, Circuit Side

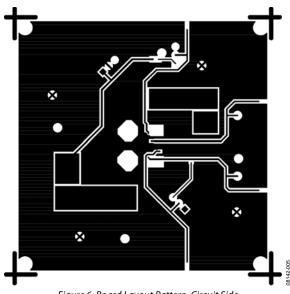


Figure 6. Board Layout Pattern, Circuit Side

ORDERING INFORMATION

BILL OF MATERIALS

Table 1.

Qty **Reference Designator** Description Package **Part Number** GND1 to GND4, TP1 to TP6 10 Test points R1 to R24, R29 to R30 Resistors, user defined 0402 26 PXXXKLCT-ND 0603 4 R25 to R28 Resistors, 0 Ω P0.0GCT-ND 4 C1, C4, C7, C14 Capacitors, tantalum, 10 µF 7343 399-3765-1-ND 4 C2, C6, C9, C13 Capacitors, 0.1 µF 0508 or 0603 478-7414-1-ND or 399-1095-1-ND 2 Capacitors, 0.1 µF 0402 C10, C12 399-3027-1-ND 12 +IN1, -IN1, +IN2, -IN2, VOCM1, SMA connectors End launch J502-ND VOCM2, PD1/DIS1, PD2/DIS2, +OUT1, -OUT1, +OUT2, -OUT2 3 P1 to P3 3-pin headers, 100 mils spacing TSW-103-08-G-S SAM1038-03-ND Dual differential amplifier 1 Z1 24-lead LFCSP ADA4927-2, ADA4930-2, ADA4937-2, ADA4938-2, ADA4939-2, or ADA4940-2

ESD Caution ESD (electro

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Legal Terms and Conditions

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Technology Way, Norwood, MA 02062, USA. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NONINFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.

©2009–2017 Analog Devices, Inc. All rights reserved. Trademarks and registered trademarks are the property of their respective owners. UG08142-0-8/17(C)



www.analog.com