


SEE DETAIL "A" SECTION A-A




CHAMFER  
DETAIL A  
Scale: 6:1

**UNCONTROLLED  
DOCUMENT**

NOTES:


1. PARTS MUST BE TUMBLED, BURNISHED OR DEBURRED TO REMOVE ALL BURRS AND SHARP EDGES.

SCALE DRAWING 1:1

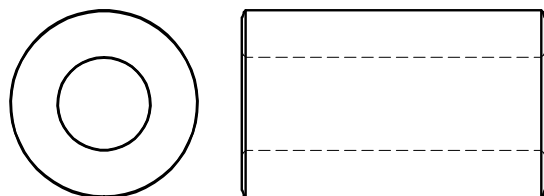

28B1020-300

IMPEDANCE ( Z )			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	212 Ω	369 Ω	477 Ω
Minimum	- Ω	295 Ω	- Ω

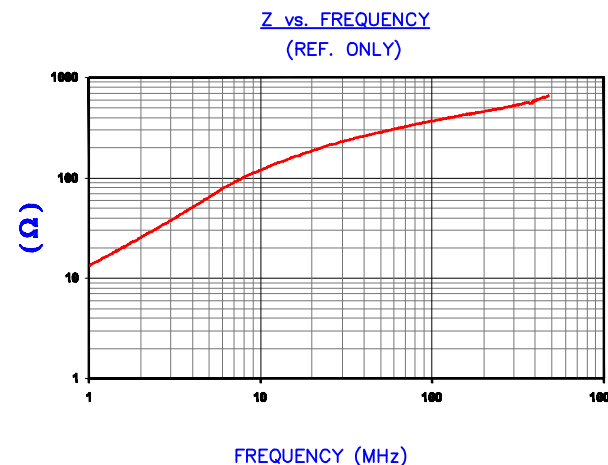

AGILENT E4991A Impedance/Material Analyzer  
HP 16062A Test Fixture

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	25.91 [1.020]	±	0.50 [.020]
B	12.83 [.505]	±	0.30 [.012]
C	42.00 [1.653]	±	2.00 [.079]

WEIGHT/1000      82.46 kgs      181.79 lbs

DIMENSIONS ARE IN mm [INCHES].

This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.



PROJECT/PART NUMBER: 28B1020-300		REV A	PART TYPE: CNZ CORE	DRAWN BY: JRK
DATE: 01/08/09	SCALE: 1.5 : 1	MATERIAL: NiZn Ferrite		
REV A	DESCRIPTION ORIGINAL DRAFT	DATE 01/08/09	INT JRK	CAD # 28B1020-300-A
				TOOL # B1020