


# SOLDER TERMINALS - CERAMIC INSULATED, STAND OFF

Dimensions in inches (mm)

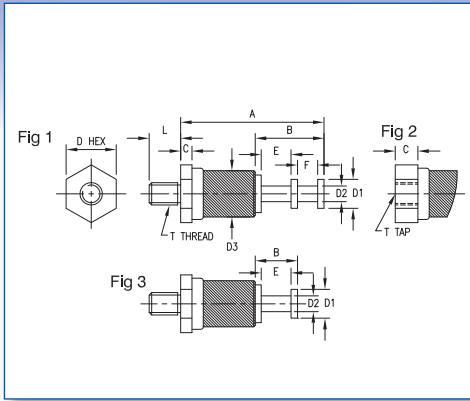

How to order code

**570 - XXXX - XX - XX - 00**

Basic Part No. | Terminal Finish

Material Code Table		
Component	Material	RoHS
Insulator	Ceramic	✓
Mounting Stud	Brass	✓
Terminal	Brass	✓

Finish Code Table			
Dash No.	Terminal Finish	Mtg. Stud Finish	RoHS
-01	Silver	Cadmium	X
-05	Electro-Solder		
-21	Silver	Nickel	✓

Fig.	Basic Part No.	L	A	B	C	D	D1	D2	D3	F	G	T	IR (VRMS)
1	570-2045 -01*	.250 (6.35)	.545 (13.84)	.219 (5.56)	.046 (1.17)	.250 (6.35)	.093 (2.36)	.046 (1.17)	.187 (4.75)	.093 (2.36)	.063 (1.60)	4-40	2500
	-02*	.375 (9.53)											
	570-1942 -01*	.250 (6.35)	.561 (14.25)	.219 (5.56)	.062 (1.57)	.312 (7.92)	.093 (2.36)	.046 (1.17)	.245 (6.22)	.093 (2.36)	.063 (1.60)	6-32	4000
	-02*	.375 (9.53)											
2	570-1994 -01	.250 (6.35)	.706 (17.93)	.359 (9.12)	.062 (1.57)	.312 (7.92)	.142 (3.61)	.065 (1.65)	.245 (6.22)	.151 (3.84)	.099 (2.51)	6-32	4000
	-02	.375 (9.53)											
	570-3650 -01	-	.608 (15.44)	.219 (5.56)	.125 (3.18)	.250 (6.35)	.093 (2.36)	.046 (1.17)	.187 (4.75)	.093 (2.36)	.063 (1.60)	4-40	2500
	-02											6-32	
3	570-3648 -01	-	.608 (15.44)	.219 (5.56)	.125 (3.18)	.312 (7.92)	.093 (2.36)	.046 (1.17)	.245 (6.22)	.093 (2.36)	.063 (1.60)	4-40	4000
	-02											6-32	
	570-1980 -01	.093 (2.36)	.383 (9.73)	.156 (3.96)	.040 (1.02)	.188 (4.78)	.094 (2.39)	.046 (1.17)	.142 (3.61)	.109 (2.77)	-	3-48	2500
	-02	.125 (3.18)											
	-03	.156 (3.96)											
	-04	.188 (4.78)											
	-05	.250 (6.35)											
	570-1983 -02	.125 (3.18)	.446 (11.33)	.156 (3.96)	.040 (1.02)	.188 (4.78)	.094 (2.39)	.046 (1.17)	.142 (3.61)	.109 (2.77)	-	3-48	4000
	-03	.156 (3.96)											
	-04	.188 (4.78)											
570-1992 -02	.125 (3.18)	.508 (12.90)	.156 (3.96)	.040 (1.02)	.188 (4.78)	.094 (2.39)	.046 (1.17)	.142 (3.61)	.109 (2.77)	-	3-48	5000	
-03	.156 (3.96)												
-04	.188 (4.78)												
570-1995 -01	.250 (6.35)	.588 (14.94)	.235 (5.97)	.062 (1.57)	.312 (7.92)	.142 (3.61)	.065 (1.65)	.245 (6.22)	.157 (3.99)	-	6-32	4000	
-02	.375 (9.53)												

\*Supplied with unassembled nut & lock washer