

塑封超快速整流二极管


反向电压 100V

正向电流 1.5 A

Plastic Ultra-Fast Recover Rectifier

Reverse Voltage 100V

Forward Current 1.5 A

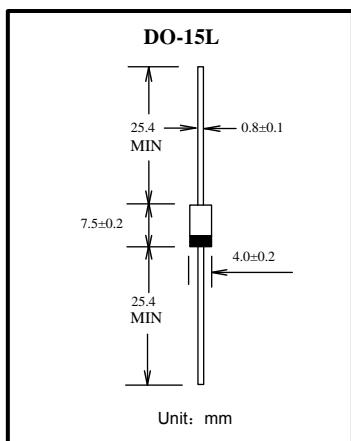

特征 Features

- 反向漏电流低 Low reverse leakage
- 正向浪涌承受能力较强 High forward surge capability
- 高温焊接保证 High temperature soldering guaranteed:
260°C/10 秒, 0.375" (9.5mm)引线长度。
260°C/10 seconds, 0.375" (9.5mm) lead length,
- 引线可承受5 磅 (2.3kg) 拉力。5 lbs. (2.3kg) tension
- 引线和管体皆符合RoHS标准 。
Lead and body according with RoHS standard

机械数据 Mechanical Data

- 端子: 镀锡轴向引线 Terminals: Plated axial leads
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性 TA = 25°C 除非另有规定。

Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	RU2YX	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	V _{RRM}	100	V
最大均方根电压 Maximum RMS voltage	V _{RMS}	70	V
最大正向平均整流电流 Maximum average forward rectified current	I _{F(AV)}	1.5	A
峰值正向浪涌电流 8.3ms单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	I _{FSM}	30	A
典型热阻 Typical thermal resistance	R _{θJA}	25	°C/W
工作结温和存储温度 Operating junction and storage temperature range	T _j , T _{TSG}	-55 --- +150	°C

电特性 TA = 25°C 除非另有规定。

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	RU2YX	单位 Unit
最大正向电压 Maximum forward voltage	I _F =1.5A	V _F	V
最大反向电流 Maximum reverse current	TA = 25 °C TA = 100 °C	I _R	μA
最大反向恢复时间 MAX. Reverse Recovery Time	I _F = 0.5A I _R = 1.0A I _{RR} = 0.25A	trr	nS

特性曲线 Characteristic Curves

