


表面安装超快速整流二极管  
反向电压 50 --- 600V  
正向电流 3.0 A

Surface Mount Super Fast Recover Rectifiers  
Reverse Voltage 50 to 600 V  
Forward Current 3.0 A

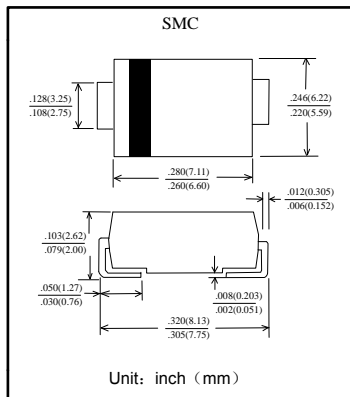

### 特征 Features

- 反向漏电流低 Low reverse leakage
- 正向浪涌承受能力较强 High forward surge capability
- 高温焊接保证 High temperature soldering guaranteed:  
260°C/10 秒 seconds at terminals
- 引线 and 管体皆符合RoHS标准。  
Lead and body according with RoHS standard

### 机械数据 Mechanical Data

- 封装: 塑料封装 Case: Molded plastic body
- 端子: 焊料被镀 Terminals: Solder plated
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性 TA = 25°C 除非另有规定。

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	ES3A	ES3B	ES3C	ES3D	ES3E	ES3G	ES3J	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	150	200	300	400	600	V
最大均方根电压 Maximum RMS voltage	$V_{RMS}$	35	70	105	140	210	280	420	V
最大直流阻断电压 Maximum DC blocking voltage	$V_{DC}$	50	100	150	200	300	400	600	V
最大正向平均整流电流 Maximum average forward rectified current	$I_{F(AV)}$	3.0							A
峰值正向浪涌电流 8.3ms 单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	$I_{FSM}$	100							A
典型热阻 Typical thermal resistance	$R_{\theta JA}$	47							°C/W
工作结温和存储温度 Operating junction and storage temperature range	$T_J, T_{STG}$	-55 --- +150							°C

电特性 TA = 25°C 除非另有规定。

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	ES3A	ES3B	ES3C	ES3D	ES3E	ES3G	ES3J	单位 Unit
最大正向电压 Maximum forward voltage	$I_F = 3.0A$ $V_F$	0.95				1.25		1.7	V
最大反向电流 Maximum reverse current	TA= 25°C TA= 100°C $I_R$	10 100							μA
最大反向恢复时间 MAX. Reverse Recovery Time	$I_F=0.5A$ $I_R=1.0A$ $I_{RR}=0.25A$ $t_{rr}$	35							nS
典型结电容 Type junction capacitance	$V_R = 4.0V, f = 1MHz$ $C_j$	30							pF

特性曲线 Characteristic Curves

