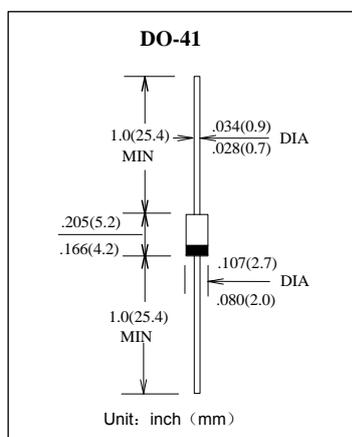


## 塑封肖特基二极管

PLASTIC SCHOTTKY  
BARRIER RECTIFIER

## 特征 Features

- 大电流承受能力。High Current Capability
- 正向压降低。Low Forward Voltage Drop
- 高温焊接保证 High temperature soldering guaranteed:  
260°C/10 秒, 0.375" (9.5mm) 引线长度。  
260°C/10 seconds, 0.375" (9.5mm) lead length,
- 引线可承受5 磅 (2.3kg) 拉力。5 lbs. (2.3kg) tension
- 引线 and 管体皆符合RoHS标准。  
Lead and body according with RoHS standard

## 机械数据 Mechanical Data

- 端子: 镀锡轴向引线 Terminals: Plated axial leads
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 安装位置: 任意 Mounting Position: Any

极限值和电参数 TA = 25°C 除非另有规定。


Maximum Ratings & Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

	符号 Symbols	1N5817	1N5818	1N5819	单位 Unit
最大峰值反向电压 Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	V
最大反向有效值电压 Maximum RMS voltage	V <sub>R(RMS)</sub>	14	21	28	V
最大直流阻断电压 Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	V
最大正向平均整流电流 Maximum average forward rectified current	I <sub>FM</sub>	1.0			A
最大正向电压降 IF = 1.0A Maximum forward voltage	V <sub>F</sub>	0.450	0.550	0.600	V
正向峰值浪涌电流 8.3ms 单一正弦半波 Peak forward surge current 8.3 ms single half sine-wave	I <sub>FSM</sub>	25			A
最大反向漏电流 TA = 25°C Maximum reverse current TA = 100°C	I <sub>R</sub>	0.5 10			mA
典型热阻 Typical thermal resistance	R <sub>θJA</sub>	80			°C/W
典型结电容 V <sub>R</sub> = 4.0V, f = 1.0MHz Type junction capacitance	C <sub>j</sub>	110			pF
工作温度和存储温度 Operating junction and storage temperature range	T <sub>j</sub> , T <sub>STG</sub>	- 55 --- +150			°C

特性曲线 Characteristic Curves


正向特性曲线 (典型值)

TYPICAL FORWARD CHARACTERISTIC

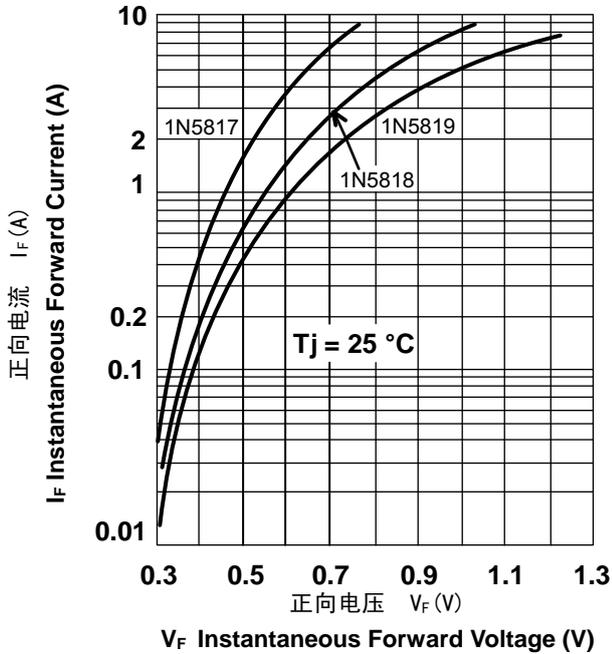

正向电流降额曲线

FORWARD CURRENT DERATING CURVE

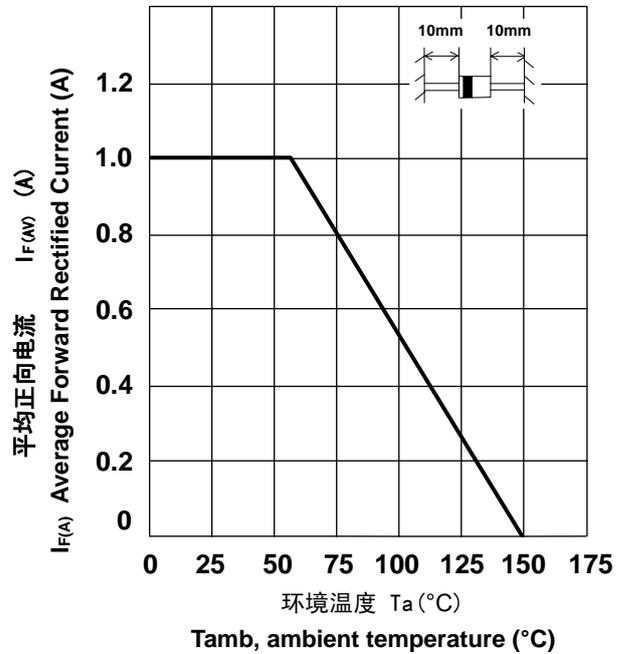

浪涌特性曲线 (最大值)

MAXIMUM NON REPETITIVE PEAK FORWARD SURGE CURRENT

