


## Codis SV-126 10-Inch Smart Display

Rugged touchscreen display with built-in graphics processing and modular expansion slots

## Compact, rugged design with powerful processing and open architecture delivers situational awareness for C4ISR

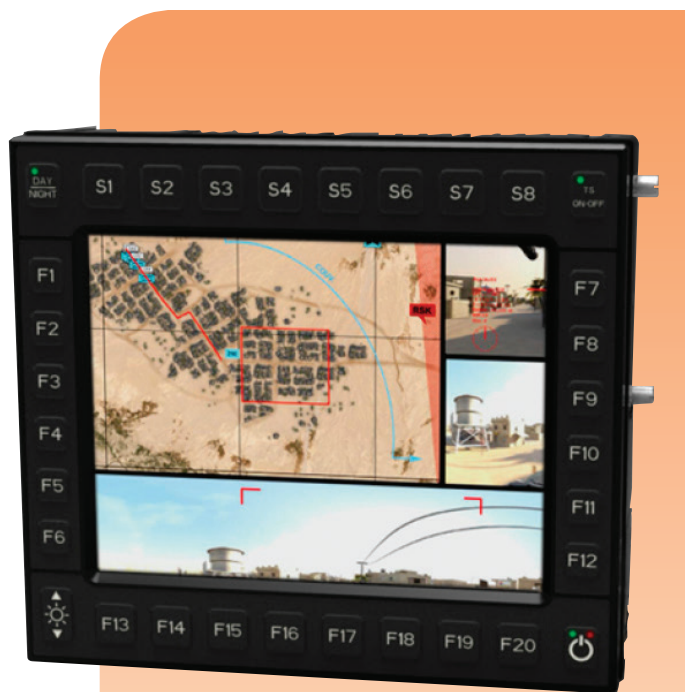

The Codis SV-126 smart display from Esterline combines a 10-inch high-bright touchscreen with the graphics and computing power of a rugged computer to provide a high-performance visualization processor in a compact footprint. Because of its design for SWaP-C and modular open architecture, this display is ideal for vehicle-mounted C4ISR applications.

### Extreme Performance

Our SV-126 smart display offers the latest proven technologies, such as a rugged analog-resistive, low-reflection touchscreen and the latest generation of Intel® Core™ processors. These features are packaged to deliver optimal performance while operating in harsh environments.

### Modular Design

The SV-126 display includes six expansion slots based on open industry standards. This modularity allows customized IO configurations and dedicated hardware controllers to support multiple security domains.

### Image Processing and Real-Time Performance

The SV-126 display connects to a variety of imaging and data sources to deliver enhanced situational awareness. The Codis media-management software supplied with the display enables hardware-accelerated GPU-based image processing with low latency for stream decoding, scaling, and windowing. The display can be optionally equipped with the Codis XMC video board for hard real-time video inputs directly to the screen.

# Codis SV-126 10-Inch Smart Display

## Specifications

Panel size	10.4 inches diagonal, 4:3 aspect ratio	Graphics card	Integrated Intel® HD Graphics 4600
Resolution	1024 x 768 (XGA)	Storage capacity	120 GB field-removable SSD, SATA 3.1 compliant (6 Gb/sec)
Color depth	6 bits/color 8 bits/color with patented dithering algorithm	Inputs / outputs	2x Intel PRO1000 Gigabit Ethernet ports 4x USB 2.0 4x serial lines (RS-232/RS-422/RS-485) 2x CAN bus (ISO 11898, CAN 2.0 A/B, and J1939 compliant) HD audio in/out/micro 4x video inputs RS-170, PAL/NTSC 4x GPIO + PTT I/O isolated or buffered as applicable
Brightness	Day mode: 650 cd/m <sup>2</sup> / 190 fL min. Night mode: 3.43 cd/m <sup>2</sup> / 1.0 fL max., dimnable to black	Option slots	1x PCI-e 1x XMC or M.2 mini PCI-e 3x mini PCI-e
Contrast ratio	700:1 (dark environment)	Operating system	CentOS Linux, 64-bit
Dimming ratio	> 200:1 typical	Power supply	MIL-STD-1275E compliant
HMI	4 control keys 32 function keys Rugged AR high-resolution touchscreen	Power consumption	50 W typical, 80 W max. (without heaters)
Computing	Intel® QuadCore™ i7-4700EQ, 4x 1.7 GHz, 16 GB RAM	Dimensions	286 x 254 x 68 mm / 11.25 x 10.0 x 2.66 inches (w x h x d)
		Weight	5.9 kg / 13 lbs
		Environmental	MIL-STD-810G Operating temperature: -46° to +65° C (+71° C with limitations) Storage temperature: -51° to +71° C Humidity: 95 percent, 60° C Altitude: 40,000 feet operating, 50,000 feet non-operating Salt fog: 48 hours, 5-percent concentration Sand and dust: blowing sand/dust Ingress protection: 1 meter immersion for 30 minutes Vibration: tracked-vehicle profile Shock: 40 g, 23 ms (6 shocks/axis)
		EMI / EMC	MIL-STD-461F Ground army

For more information about  
**Codis SV-126 smart displays,**  
email [sales.codis@esterline.com](mailto:sales.codis@esterline.com).

Esterline  
President Kennedypark 35 A  
8500 Kortrijk  
Belgium  
Tel: +32-56-27-20-00  
[www.esterline.com](http://www.esterline.com)

**Esterline**  
Control &  
Communication Systems

Approved for public release; distribution is unlimited.

© 2016 Esterline Technologies Corporation. "Codis" is a trademark of Esterline Technologies Corporation.