



Electrical Characteristics

Type No.	Maximum Allowable Voltage		Varistor Voltage V /0.1mA		Maximum Clamping Voltage	Withstanding Surge Current (8/20 μ s)		Rated Wattage	Energy (10/1000 μ s)	Certfcation	
	ACrms (V)	DC (V)	(V)	Tolerance	V@5A (V)	1 Time (A)	2 Times (A)	(W)	(J)		
5N470K	30	38	47	$\pm 10\%$	※104	100	50	0.01	1.5	★	★

※The clamping voltage from 180M to 680K are tested at current 1A.

Material of coating : Epoxy powder

Color of coating : Yellowish brown

Storage condition→ Temperature: -10℃ ~ 40℃ / Humidity : 75%RH max. Status


Preservation period : 12 months

Max. response time : 25 n sec.

Operation temperature range : -40 ~ 85℃

Lead style :

- P : Straight type
- Y : Kink type
- I : Inside kink type
- E : Outside kink type

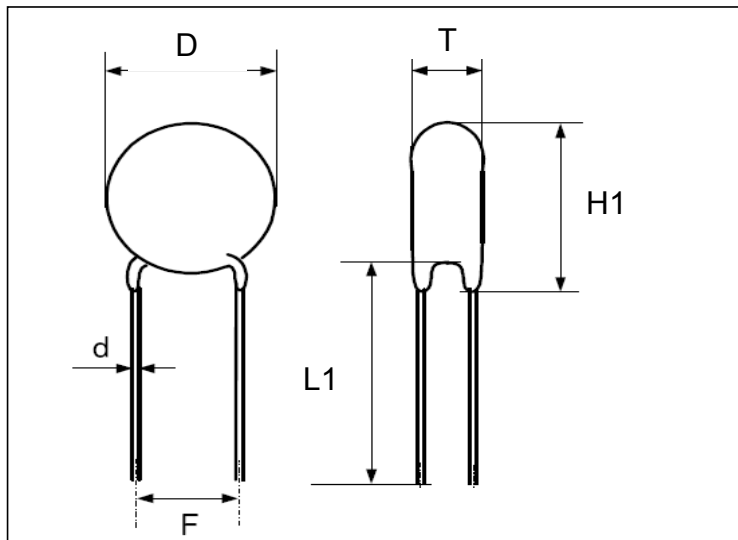

DIMENSION :

(Unit : mm)

Type No.	D max	T max	L1 min	F ± 1.0	d ± 0.05	H1 max
5N470K	7.5	5.0	25.0	5.0	0.6	10.5