



**ELECTRICAL CHARACTERISTICS**

Part No.	Working Voltage (Vw)	Clamping Voltage (Vc)	ESD Withstanding	Capacitance (C)		Capacitance Tolerance
	Volts	Volts	Times	pF		%
	<15 $\mu$ A	1A,8/20 $\mu$ s	8KV*	1KHz	1MHz	
<b>JMV0402C050T180</b>	5.0	50	> 1000	-	18	$\pm$ 20%

\* - In system ESD withstanding pulse per IEC 61000-4-2, 8KV, contact discharge method.

Vw - The max. steady state DC operating voltage of which varistor could maintain also not exceeding 15uA leakage current.

Vc - The peak voltage acrossed the varistor measured at a specified pulse current and waveform.


C - The device capacitance measured with 1.0Vrms, 1KHz / 0.5rms, 1 MHz.

Storage condition    Temperature : 30 ; Humidity : 60% RH (Moisture Sensitivity Levels: 2a)

Preservation period    12 months

Operating temperature: -55 ~ 85

Storage temperature: -55 ~ 85

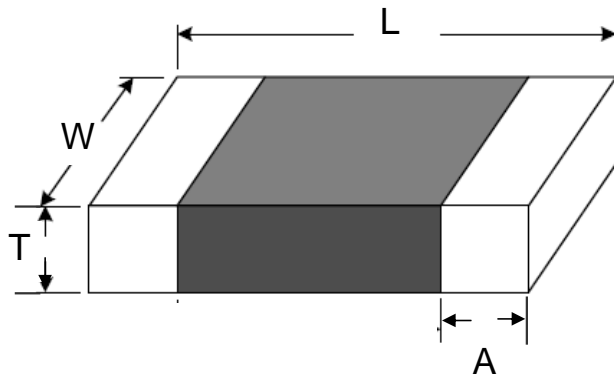

**Chip Dimension**

inch (mm)

Chip Size	L	W	T	A
0402 (1005)	0.040 $\pm$ 0.004 (1.00 $\pm$ 0.10)	0.020 $\pm$ 0.004 (0.50 $\pm$ 0.10)	0.024 max. (0.6 max.)	0.010 $\pm$ 0.006 (0.25 $\pm$ 0.15)