


DWDM OADM MODULE

Features

- Low insertion loss & high isolation
- Excellent thermal stability
- Optical path epoxy free
- Telcordia compliant
- RoHS compliant

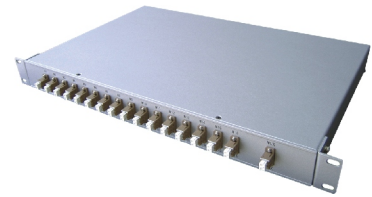

Applications


- DWDM system
- Long haul/Metro networks

Specifications

Parameter		Specification				Unit
Channel Center Wavelength		C/L band, ITU-T grid				nm
Channel Spacing		0.8 (100GHz)		1.6 (200GHz)		nm
Channel Clear Passband		ITU±0.11		ITU±0.25		nm
Number of Channels		4	8	4	8	
Insertion Loss (Add/Drop)	Max	2.0	3.0	2.0	3.0	dB
Insertion Loss (Express)	Max	1.8	3.0	1.8	3.0	dB
Passband Ripple	Max	0.5	0.5	0.5	0.5	dB
Isolation (Add/Drop)	Min	28	28	30	30	dB
Isolation (Express)	Min	12	12	12	12	dB
Return Loss	Min	45	45	45	45	dB
Directivity	Min	45	45	45	45	dB
Polarization Dependent Loss	Max	0.15	0.2	0.15	0.2	dB
Polarization Mode Dispersion	Max	0.1	0.1	0.1	0.1	ps
Operating Temperature Range		0~+70				°C
Storage Temperature Range		-40~+85				°C
Maximum Power Handling		300				mW
Package Dimension (L*W*H)		110*90*12				mm

1. All values referenced without connector.
2. Available in LGX and 19" rack mount package.

Dimension

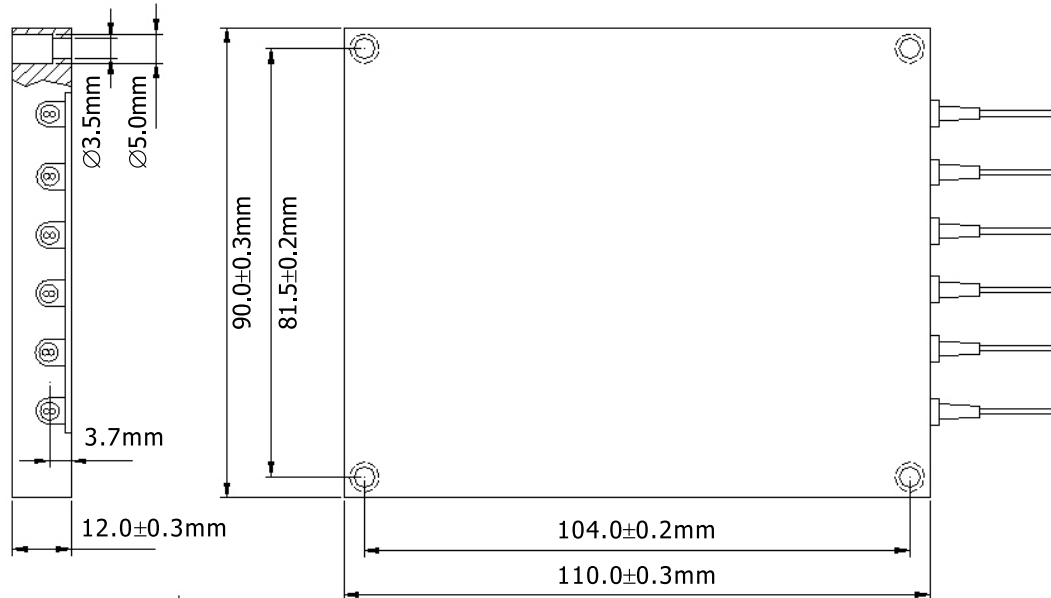

Example: 4ch DWDM OADM

Order Information

DWDM-AD-A-B-C-D-E

A	Channel Spacing	1: 100GHz 2: 200GHz
B	Number of Channels	04: 4 channels 08: 8 channels
C	Starting Channel	21: ITU ch-21 22: ITU ch-22
D	Package & Fiber Type	1: 900 μ m fiber (black module) 2: 3mm fiber (black module) 3: LGX 4: 19" rack mount
E	Connector Type	0: Without connector 1: FC/PC 2: FC/UPC 3: FC/APC 4: SC/PC 5: SC/UPC 6: SC/APC 7: ST 8: LC 9: MU X: Customized