



LED Linear Lighting

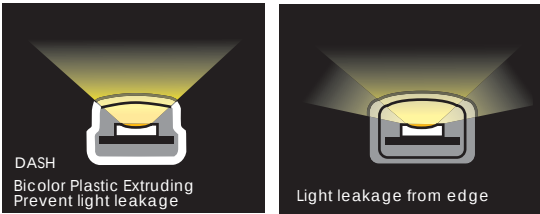

DASH

Dimensions: (inches/mm)



Characteristics:

- Linkable up to 177-3/16" (4500mm)
- Dark spot free at the linking point
- Uniform light
- Lifetime : 35, 000 hrs (ta=77°F, 25 °C)
- ta: -4°F ~ 95°F (-20 °C ~ 35 °C)
- CCT: 3000K 4000K 5000K

Housing colour: ☐

Application:


Surface-mounted on furniture, display shelves, showcases and cupboards etc.

| Model        | IN    | W    |      | L                 |        | Max NO. |
|--------------|-------|------|------|-------------------|--------|---------|
| DASH-L2-24V  | 24VDC | 0.4W | 110° | 2-3/8" (60mm)     | 2 pcs  | 75 pcs  |
| DASH-L4-24V  | 24VDC | 0.8W | 110° | 4-3/4" (120mm)    | 4 pcs  | 37 pcs  |
| DASH-L10-24V | 24VDC | 2.0W | 110° | 11-13/16" (300mm) | 10 pcs | 15 pcs  |
| DASH-L20-24V | 24VDC | 4.0W | 110° | 23-5/8" (600mm)   | 20 pcs | 7 pcs   |

LED Linear Lighting

| Vertical & Horizontal Beamwidth |           |       |       |       |             |       |       |       |       | Center Beam FC |       |        |        |        |              |        |        |        |        |
|---------------------------------|-----------|-------|-------|-------|-------------|-------|-------|-------|-------|----------------|-------|--------|--------|--------|--------------|--------|--------|--------|--------|
| DASH-L2-24V                     |           |       |       |       | DASH-L4-24V |       |       |       |       | DASH-L10-24V   |       |        |        |        | DASH-L20-24V |        |        |        |        |
| 12"                             | 34-1/4"   | 8     | 8     | 9     | 9           | 9     | 16    | 16    | 18    | 18             | 18    | 35     | 35     | 39     | 53           | 53     | 58     | 58     | 58     |
| 18"                             | 51-7/16"  | 4     | 4     | 4     | 4           | 4     | 7     | 7     | 8     | 8              | 8     | 17     | 17     | 19     | 29           | 29     | 32     | 32     | 32     |
| 24"                             | 68-9/16"  | 2     | 2     | 2     | 2           | 2     | 4     | 4     | 5     | 5              | 5     | 10     | 10     | 11     | 18           | 18     | 20     | 20     | 20     |
| 30"                             | 85-11/16" | 1     | 1     | 2     | 2           | 2     | 3     | 3     | 3     | 3              | 3     | 7      | 7      | 8      | 12           | 12     | 13     | 13     | 13     |
| H                               | D         | 20 lm | 20 lm | 22 lm | 22 lm       | 22 lm | 40 lm | 40 lm | 44 lm | 44 lm          | 44 lm | 100 lm | 100 lm | 110 lm | 200 lm       | 200 lm | 220 lm | 220 lm | 220 lm |

Installation:

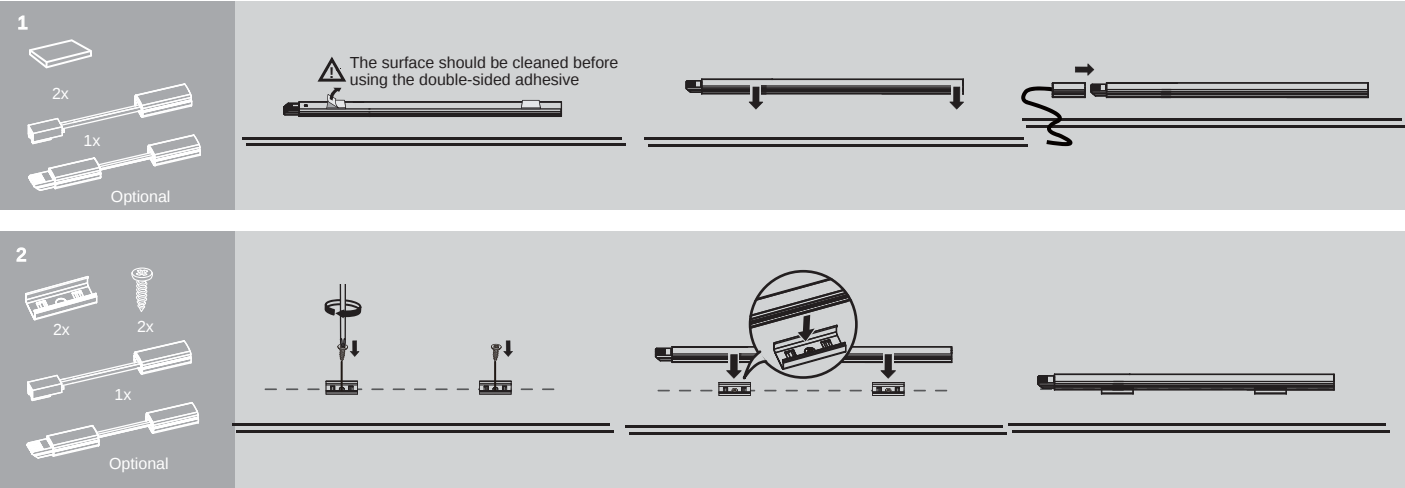

Wiring diagram:

| Model        | Connecting Cable   | UL LISTED LED Power Supply                                                                         | Max. Linkable |
|--------------|--------------------|----------------------------------------------------------------------------------------------------|---------------|
| DASH-L2-24V  | <br>L=59" (1500mm) | <br>L=5-15/16" (150mm) SLT30-24VF-A L=59" (1500mm)<br>Input:100-120VAC<br>Output:24VDC<br>Max.:30W | 75 pcs        |
| DASH-L4-24V  |                    |                                                                                                    | 37 pcs        |
| DASH-L10-24V |                    |                                                                                                    | 15 pcs        |
| DASH-L20-24V |                    |                                                                                                    | 7 pcs         |

Wiring diagram:

| Model        | Connecting Cable   | Splitter                        | LED Power Supply                                                 | Max. Linkable |
|--------------|--------------------|---------------------------------|------------------------------------------------------------------|---------------|
| DASH-L2-24V  | <br>L=59" (1500mm) | <br>JB-4A<br>L=5-15/16" (150mm) | <br>SLT30-24VF<br>Input:100~240VAC<br>Output: 24VDC<br>Max.: 30W | 75 pcs        |
| DASH-L4-24V  |                    |                                 |                                                                  | 37 pcs        |
| DASH-L10-24V |                    |                                 |                                                                  | 15 pcs        |
| DASH-L20-24V |                    |                                 |                                                                  | 7 pcs         |