




# STP11NC40, STP11NC40FP

## N-CHANNEL 400V - 0.44Ω - 9.5A TO-220/TO-220FP

### PowerMESH™ II Power MOSFET

TYPE	V <sub>DSS</sub>	R <sub>DS(on)</sub>	I <sub>D</sub>	P <sub>w</sub>
STP11NC40	400 V	< 0.55 Ω	9.5 A	120 W
STP11NC40FP	400 V	< 0.55 Ω	9.5 A(*)	30 W

- TYPICAL R<sub>DS(on)</sub> = 0.44 Ω
- EXTREMELY HIGH dv/dt CAPABILITY
- 100% AVALANCHE TESTED
- NEW HIGH VOLTAGE BENCHMARK
- GATE CHARGE MINIMIZED

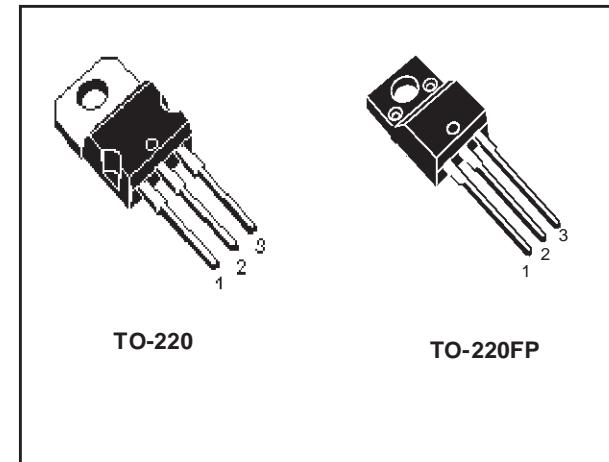


#### DESCRIPTION

The PowerMESH™ II is the evolution of the first generation of MESH OVERLAY™. The layout refinements introduced greatly improve the Ron\*area figure of merit while keeping the device at the leading edge for what concerns switching speed, gate charge and ruggedness.

#### APPLICATIONS

- HIGH CURRENT, HIGH SPEED SWITCHING
- SWITH MODE POWER SUPPLIES (SMPS)
- DC-AC CONVERTERS FOR WELDING EQUIPMENT AND UNINTERRUPTIBLE POWER SUPPLIES AND MOTOR DRIVER

#### INTERNAL SCHEMATIC DIAGRAM

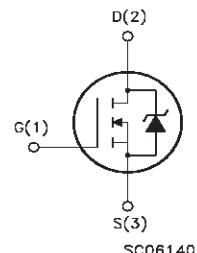

#### ORDERING INFORMATION

SALES TYPE	MARKING	PACKAGE	PACKAGING
STP11NC40	P11NC40	TO-220	TUBE
STP11NC40FP	P11NC40FP	TO-220FP	TUBE

## STP11NC40, STP11NC40FP

### ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value		Unit
		STP11NC40	STP11NC40FP	
$V_{DS}$	Drain-source Voltage ( $V_{GS} = 0$ )	400		V
$V_{DGR}$	Drain-gate Voltage ( $R_{GS} = 20 \text{ k}\Omega$ )	400		V
$V_{GS}$	Gate-source Voltage	$\pm 30$		V
$I_D$	Drain Current (continuos) at $T_C = 25^\circ\text{C}$	9.5	9.5 (*)	A
$I_D$	Drain Current (continuos) at $T_C = 100^\circ\text{C}$	6	6 (*)	A
$I_{DM}$ (1)	Drain Current (pulsed)	38	38 (*)	A
$P_{TOT}$	Total Dissipation at $T_C = 25^\circ\text{C}$	120	30	W
	Derating Factor	0.96	0.24	W/ $^\circ\text{C}$
$dv/dt$ (1)	Peak Diode Recovery voltage slope	3.5		V/ns
$V_{ISO}$	Insulation Withstand Voltage (DC)	-	2500	V
$T_j$ $T_{stg}$	Operating Junction Temperature Storage Temperature	$-55 \text{ to } 150$ $-55 \text{ to } 150$		$^\circ\text{C}$ $^\circ\text{C}$

(1) Pulse width limited by safe operating area

(1)  $I_{SD} \leq 9.5\text{A}$ ,  $di/dt \leq 100\text{A}/\mu\text{s}$ ,  $V_{DD} \leq V_{(BR)DSS}$ ,  $T_j \leq T_{JMAX}$ .

(\*) Limited only by maximum temperature allowed

### THERMAL DATA

		TO-220	TO-220FP	
Rthj-case	Thermal Resistance Junction-case Max	1.04	4.1	$^\circ\text{C/W}$
Rthj-amb	Thermal Resistance Junction-ambient Max	62.5		$^\circ\text{C/W}$
$T_l$	Maximum Lead Temperature For Soldering Purpose	300		$^\circ\text{C}$

### AVALANCHE CHARACTERISTICS

Symbol	Parameter	Max Value	Unit
$I_{AR}$	Avalanche Current, Repetitive or Not-Repetitive (pulse width limited by $T_j$ max)	9.5	A
$E_{AS}$	Single Pulse Avalanche Energy (starting $T_j = 25^\circ\text{C}$ , $I_D = I_{AR}$ , $V_{DD} = 50\text{ V}$ )	300	mJ

### ELECTRICAL CHARACTERISTICS (TCASE = $25^\circ\text{C}$ UNLESS OTHERWISE SPECIFIED) ON/OFF

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{(BR)DSS}$	Drain-source Breakdown Voltage	$I_D = 250 \mu\text{A}$ , $V_{GS} = 0$	400			V
$I_{DSS}$	Zero Gate Voltage Drain Current ( $V_{GS} = 0$ )	$V_{DS} = \text{Max Rating}$ $V_{DS} = \text{Max Rating}$ , $T_C = 125^\circ\text{C}$			1 50	$\mu\text{A}$ $\mu\text{A}$
$I_{GSS}$	Gate-body Leakage Current ( $V_{DS} = 0$ )	$V_{GS} = \pm 30\text{V}$			$\pm 100$	nA
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}$ , $I_D = 250\mu\text{A}$	2	3	4	V
$R_{DS(on)}$	Static Drain-source On Resistance	$V_{GS} = 10\text{V}$ , $I_D = 5\text{ A}$		0.44	0.55	$\Omega$

**ELECTRICAL CHARACTERISTICS (TCASE =25°C UNLESS OTHERWISE SPECIFIED)**  
**DYNAMIC**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$g_{fs}$ (1)	Forward Transconductance	$V_{DS} = 15 \text{ V}$ , $I_D = 5 \text{ A}$		8.6		S
$C_{iss}$ $C_{oss}$ $C_{rss}$	Input Capacitance Output Capacitance Reverse Transfer Capacitance	$V_{DS} = 25 \text{ V}$ , $f = 1 \text{ MHz}$ , $V_{GS} = 0$		995 172 25		pF
						pF
						pF

**SWITCHING ON**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$ $t_r$	Turn-on Delay Time Rise Time	$V_{DD} = 200 \text{ V}$ , $I_D = 5 \text{ A}$ $R_G = 4.7\Omega$ $V_{GS} = 10 \text{ V}$ (Resistive Load see, Figure 3)		15 18		ns ns
$Q_g$ $Q_{gs}$ $Q_{gd}$	Total Gate Charge Gate-Source Charge Gate-Drain Charge	$V_{DD} = 320 \text{ V}$ , $I_D = 10 \text{ A}$ , $V_{GS} = 10 \text{ V}$		32.5 6 15	45.5	nC nC nC

**SWITCHING OFF**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$t_{d(off)}$ $t_f$	Turn-off Delay Time Fall Time	$V_{DD} = 320 \text{ V}$ , $I_D = 5 \text{ A}$ $R_G = 4.7\Omega$ $V_{GS} = 10 \text{ V}$ (Resistive Load see, Figure 3)		43 15		ns ns
$t_r(V_{off})$ $t_f$ $t_c$	Off-voltage Rise Time Fall Time Cross-over Time	$V_{DD} = 320 \text{ V}$ , $I_D = 10 \text{ A}$ , $R_G = 4.7\Omega$ , $V_{GS} = 10 \text{ V}$ (Inductive Load see, Figure 5)		7.5 14 23		ns ns ns


**SOURCE DRAIN DIODE**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$I_{SD}$ $I_{SDM}$ (2)	Source-drain Current Source-drain Current (pulsed)			9.5 38		A A
$V_{SD}$ (1)	Forward On Voltage	$I_{SD} = 9.5 \text{ A}$ , $V_{GS} = 0$			1.6	V
$t_{rr}$ $Q_{rr}$ $I_{RRM}$	Reverse Recovery Time Reverse Recovery Charge Reverse Recovery Current	$I_{SD} = 9.5 \text{ A}$ , $dI/dt = 100 \text{ A}/\mu\text{s}$ $V_{DD} = 100 \text{ V}$ , $T_j = 150^\circ\text{C}$ (see test circuit, Figure 5)		315 2100 13.6		ns nC A


Note: 1. Pulsed: Pulse duration = 300  $\mu\text{s}$ , duty cycle 1.5 %.

2. Pulse width limited by safe operating area.

**Safe Operating Area For TO-220**

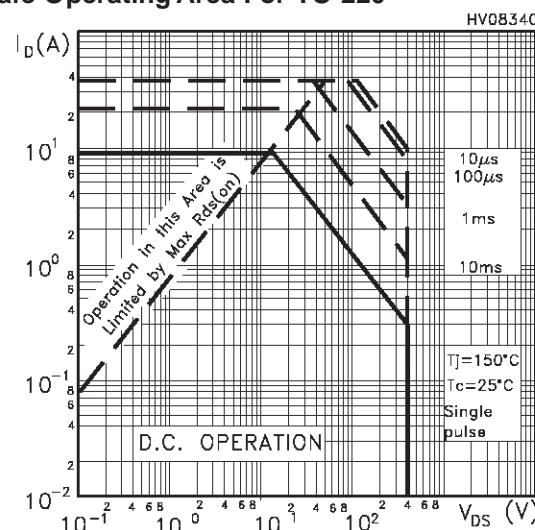


**Safe Operating Area For TO-220FP**

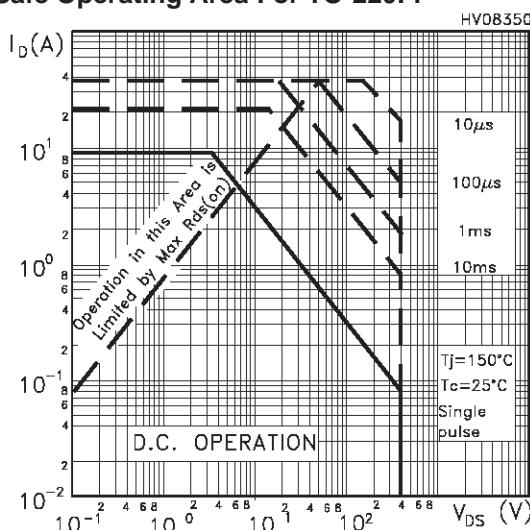


## STP11NC40, STP11NC40FP


### Thermal Impedance For TO-220

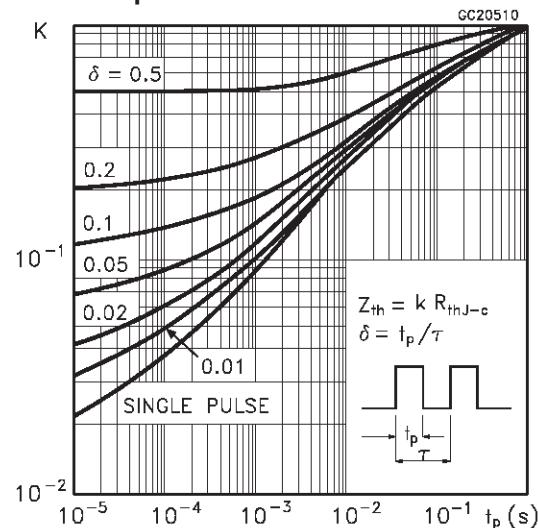


### Thermal Impedance For TO-220FP

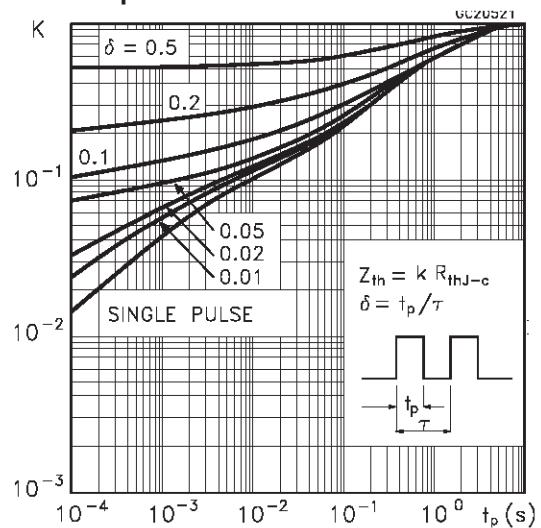


### Output Characteristics

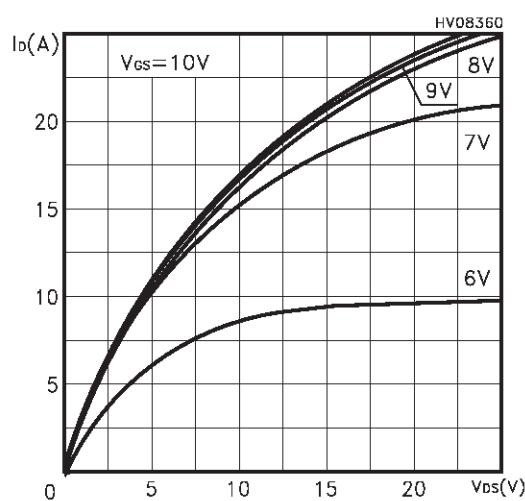


### Transfer Characteristics

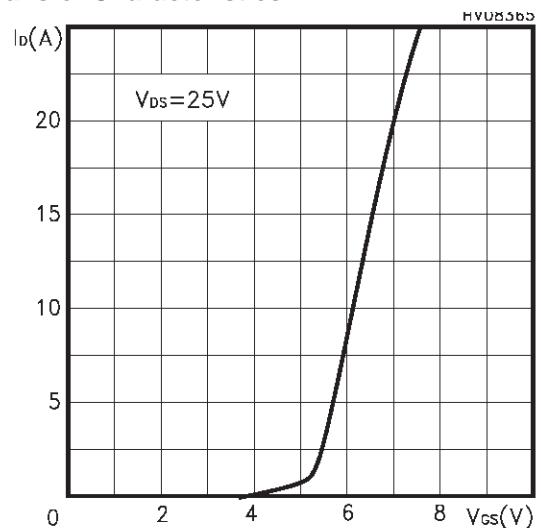


### Transconductance

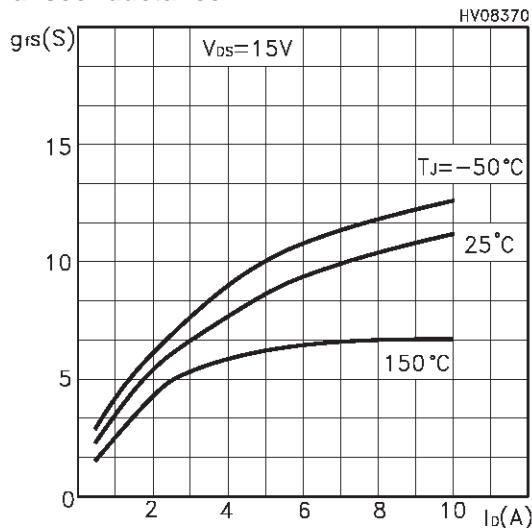


### Static Drain-source On Resistance

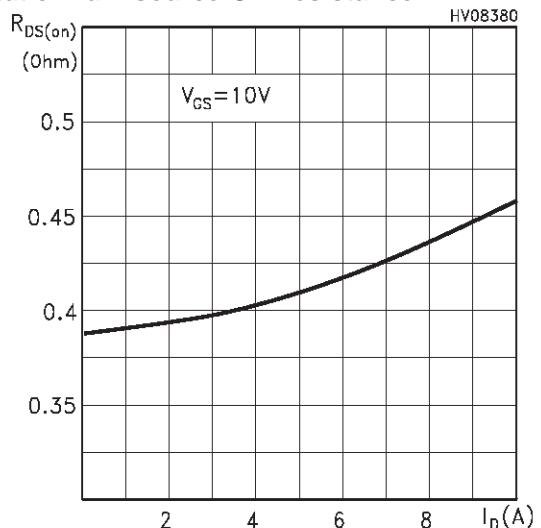


Gate Charge vs Gate-source Voltage

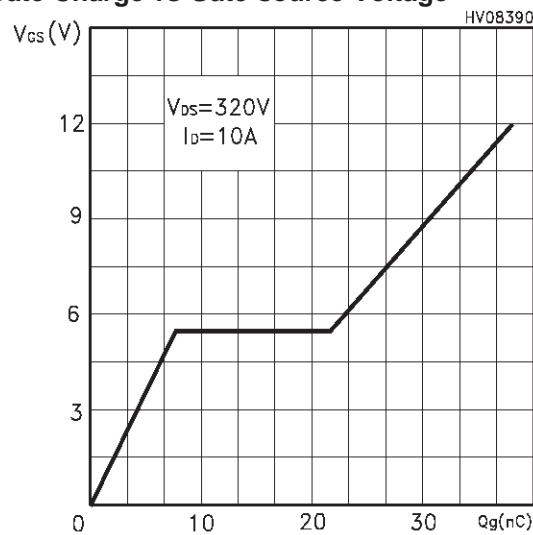


Capacitance Variations

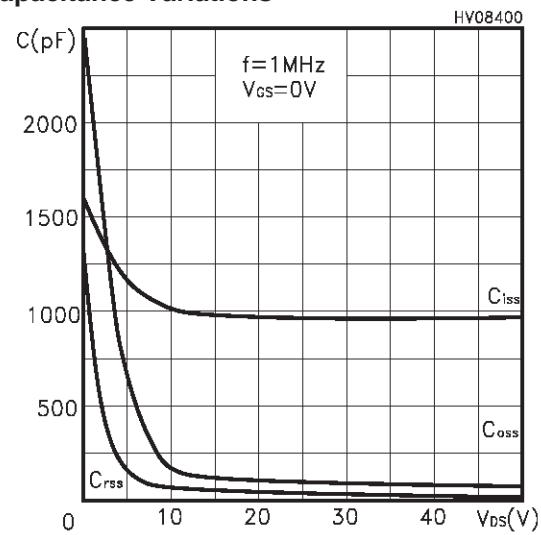


Normalized Gate Threshold Voltage vs Temperature

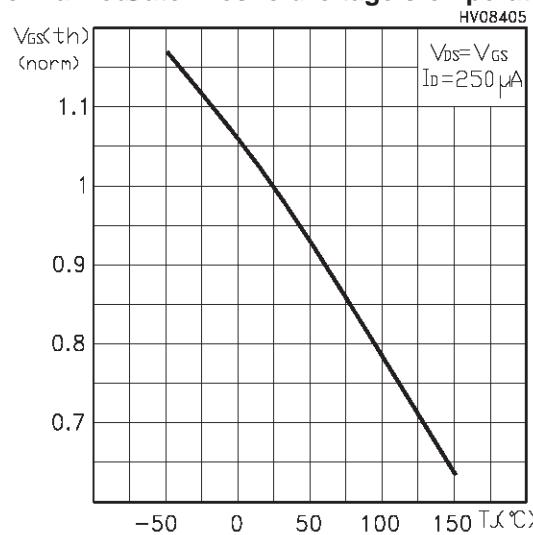


Normalized On Resistance vs Temperature

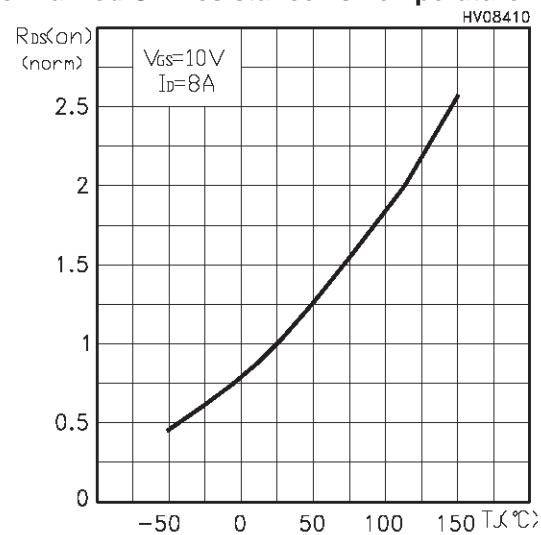

Source-drain Diode Forward Characteristics

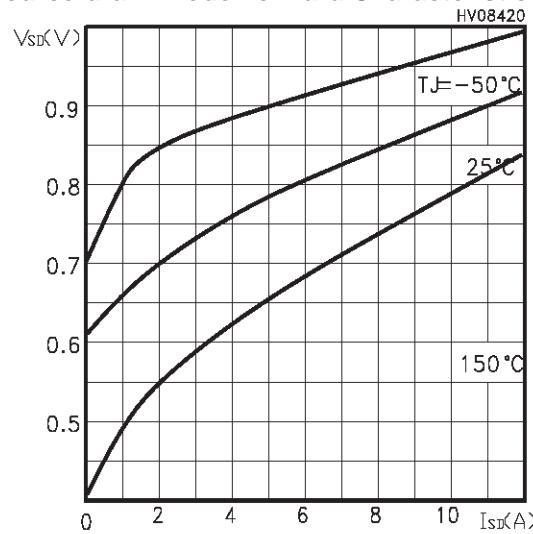


Normalized BV<sub>DSS</sub> vs Temperature

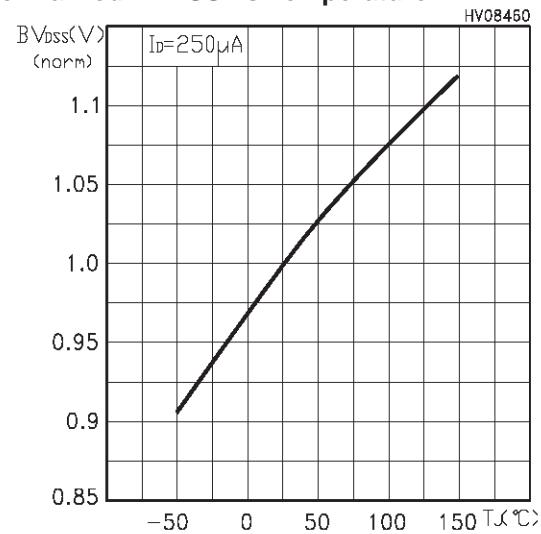


## STP11NC40, STP11NC40FP


Maximum Avalanche Energy vs Temperature

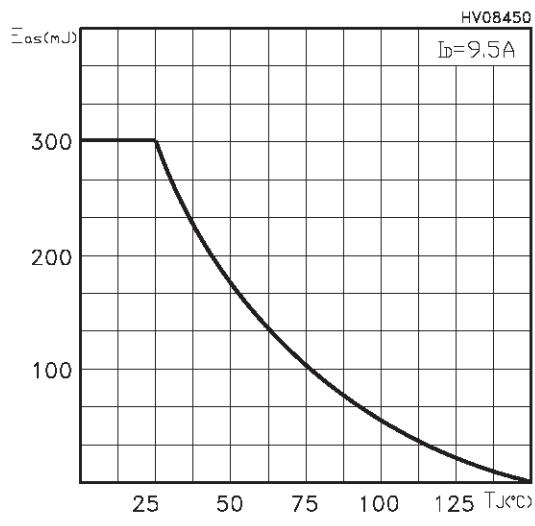


$I_d$  vs Temperature

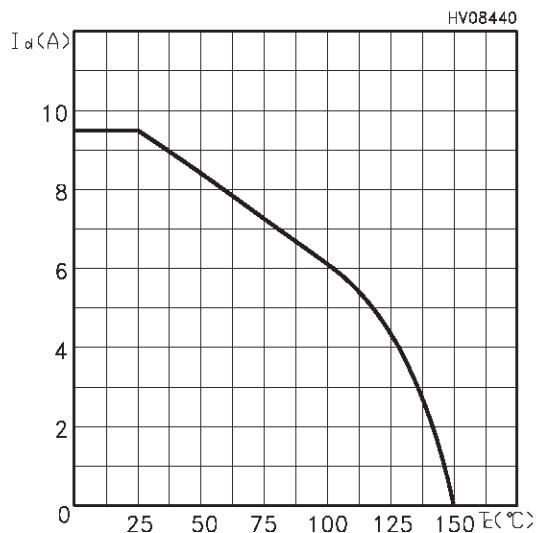


**Fig. 1:** Unclamped Inductive Load Test Circuit

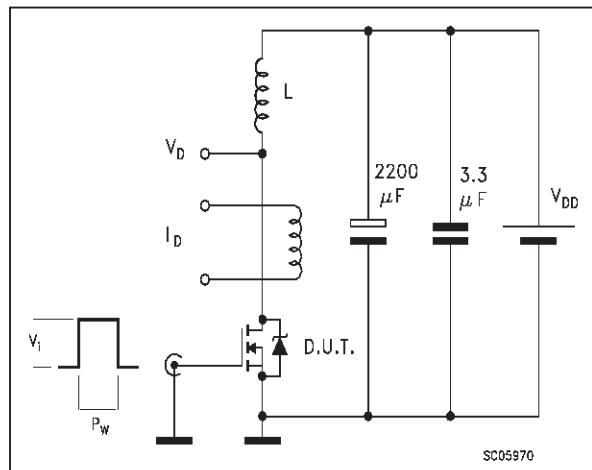


**Fig. 2:** Unclamped Inductive Waveform

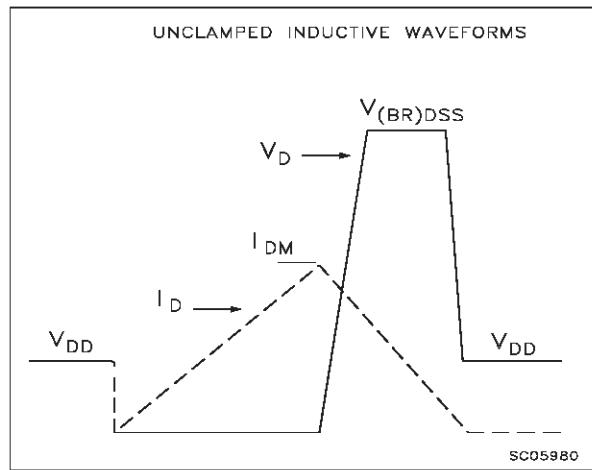


**Fig. 3:** Switching Times Test Circuit For Resistive Load

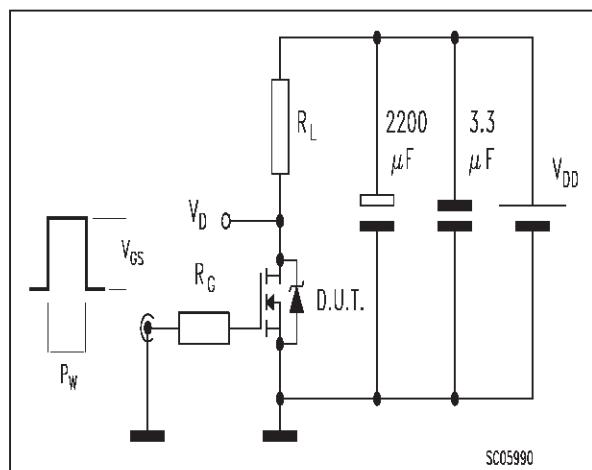

**Fig. 4:** Gate Charge test Circuit

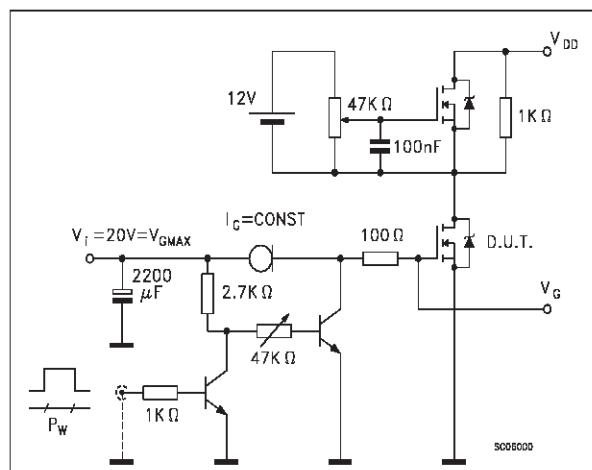


**Fig. 5:** Test Circuit For Inductive Load Switching And Diode Recovery Times

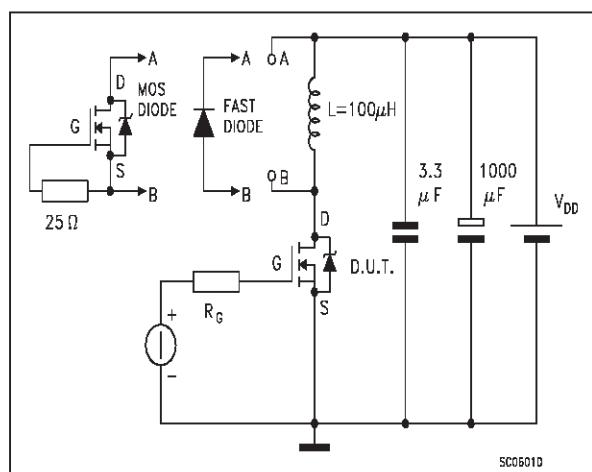


**TO-220 MECHANICAL DATA**

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.40		4.60	0.173		0.181
C	1.23		1.32	0.048		0.051
D	2.40		2.72	0.094		0.107
D1		1.27			0.050	
E	0.49		0.70	0.019		0.027
F	0.61		0.88	0.024		0.034
F1	1.14		1.70	0.044		0.067
F2	1.14		1.70	0.044		0.067
G	4.95		5.15	0.194		0.203
G1	2.4		2.7	0.094		0.106
H2	10.0		10.40	0.393		0.409
L2		16.4			0.645	
L4	13.0		14.0	0.511		0.551
L5	2.65		2.95	0.104		0.116
L6	15.25		15.75	0.600		0.620
L7	6.2		6.6	0.244		0.260
L9	3.5		3.93	0.137		0.154
DIA.	3.75		3.85	0.147		0.151

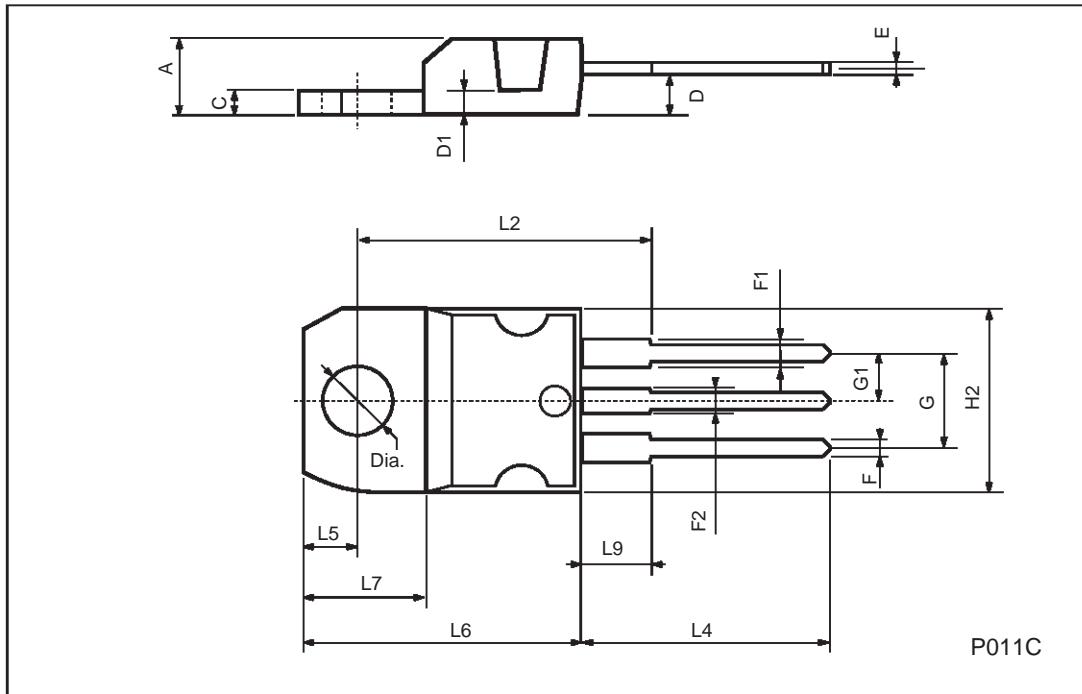

## TO-220FP MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A	4.4		4.6	0.173		0.181
B	2.5		2.7	0.098		0.106
D	2.5		2.75	0.098		0.108
E	0.45		0.7	0.017		0.027
F	0.75		1	0.030		0.039
F1	1.15		1.7	0.045		0.067
F2	1.15		1.7	0.045		0.067
G	4.95		5.2	0.195		0.204
G1	2.4		2.7	0.094		0.106
H	10		10.4	0.393		0.409
L2		16			0.630	
L3	28.6		30.6	1.126		1.204
L4	9.8		10.6	.0385		0.417
L5	2.9		3.6	0.114		0.141
L6	15.9		16.4	0.626		0.645
L7	9		9.3	0.354		0.366
Ø	3		3.2	0.118		0.126

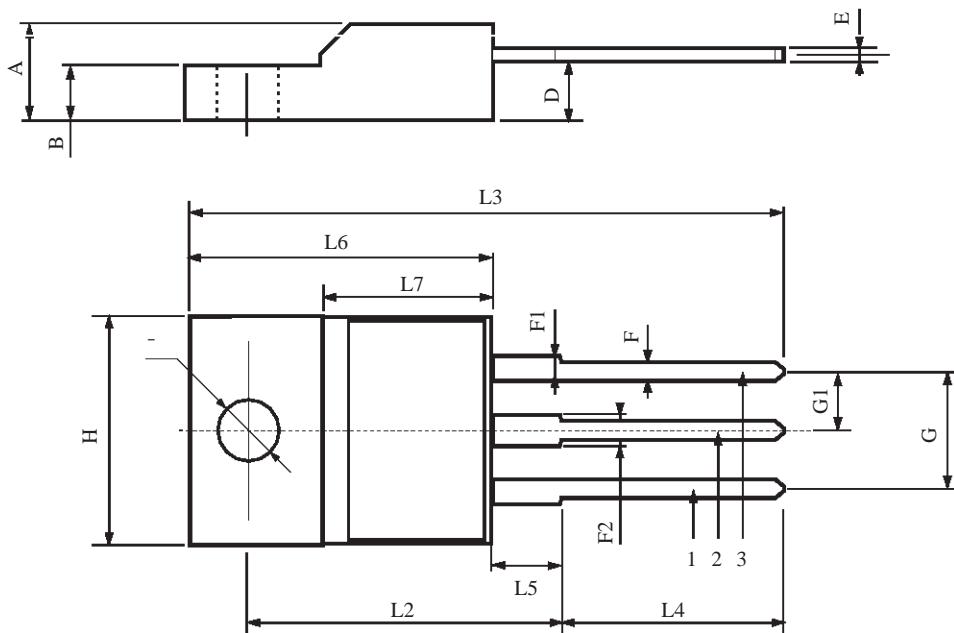

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics

© 2000 STMicroelectronics – Printed in Italy – All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco -  
Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>