


TOLERANCE ± .010

COIL: @ 25° C
 RESISTANCE 540-770 OHMS
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.0 VDC
 MUST RELEASE 10.1 VDC MAX, 2.3 VDC MIN.

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE TIME 6 MS MAX.
* CONTACT BOUNCE 1 MS MAX.
* (MEASURED AT 100mA 28 VDC)

CUSTOMER DATA SHEET

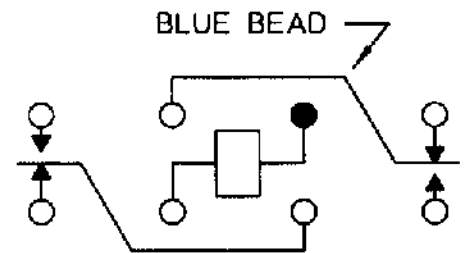

CONTACT RATING: 2 AMPS 28 VDC
RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/15/95 CK. 11/15/95 MB

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
 CUST. NO M5757/10-039

TYPE "FW" RELAY

FW1120G01