


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00	L		EC 0G3C 0675 04	08JAN04	BSV	DFR
		L1		REVISED PER ECO-09-020932	27AUG09	KK	AEG

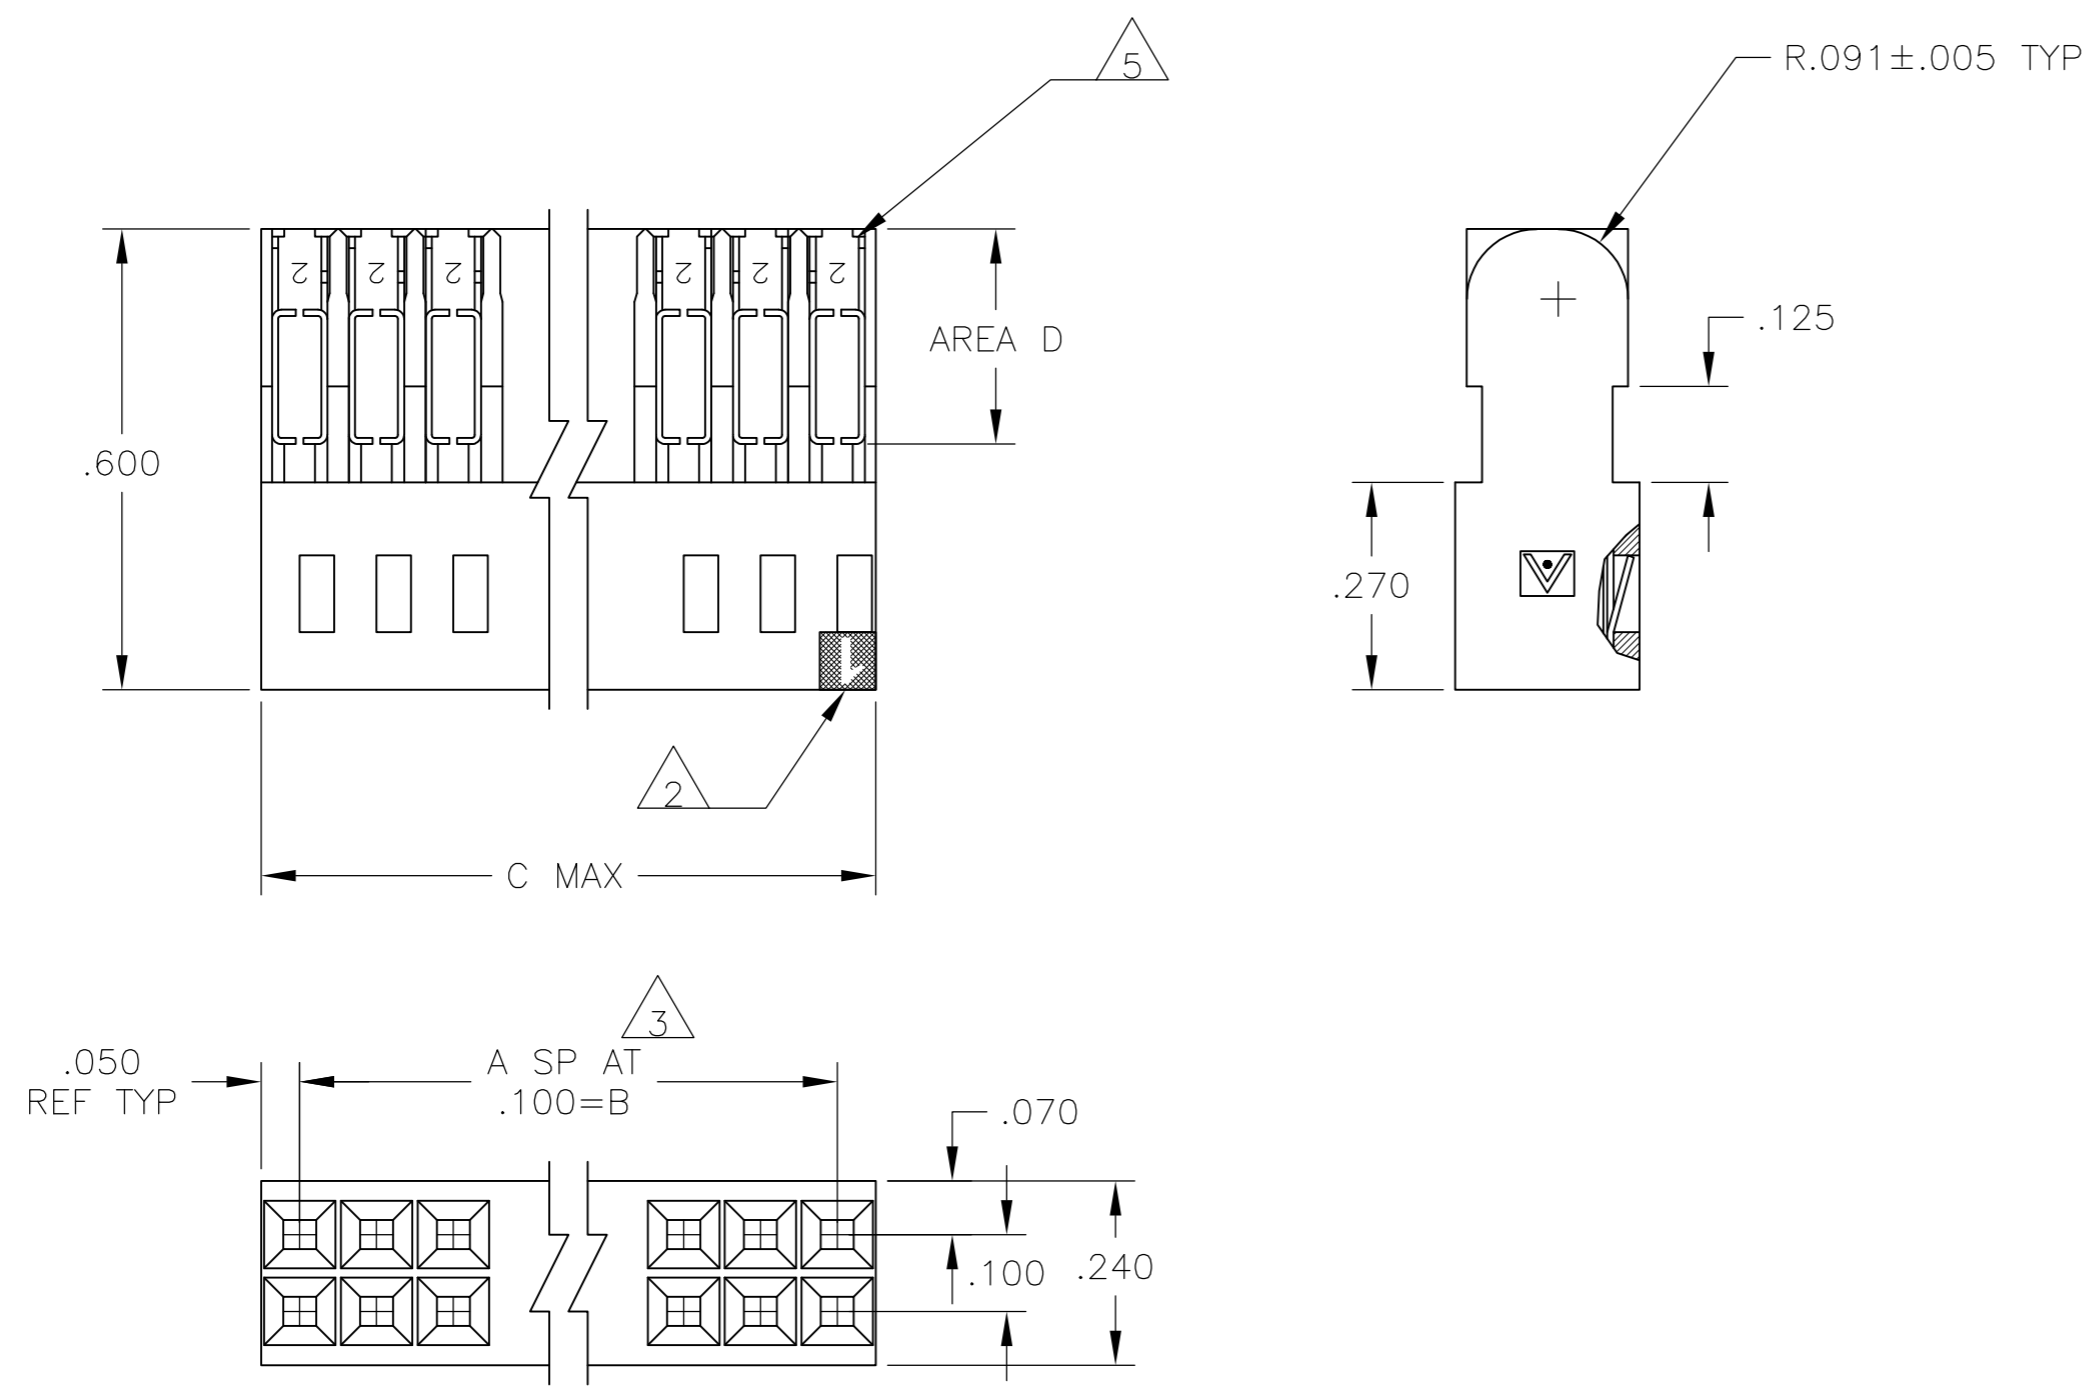

- 1 .000050 MIN W.E. #1 GOLD ALLOY IN CONTACT AREA, .000050-.000100 TIN-LEAD IN AREA D, ALL OVER .000050 NICKEL.
- 2 MOLDED CIRCUIT #1 IDENTIFIER IN LOCATION SHOWN.
- 3 TOLERANCE NON-CUMALATIVE
- 4 USE WITH 22-26 AWG WIRE SIZE, .050 MAX INSULATION DIA., .015 MAX INSULATION WALL THICKNESS.
- 5 CONTACT IDENTIFICATION NUMBER "2" LOCATED IN THIS AREA.
- 6 .000050 MIN W.E. #1 GOLD ALLOY IN CONTACT AREA, .000050 - .000100 TIN IN AREA D, ALL OVER .000050 NICKEL.
- 7 ROHS 2002/95/EC COMPLIANT
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

POSN	CL	AWG	NO OF POSN	ASSEMBLY PART NUMBER		
7	6	.400	.300	3	8	5-104305-4
7	6	1.000	.900	9	20	5-104305-3
7	6	1.700	1.600	16	34	5-104305-2
7	6	.500	.400	4	10	5-104305-1
1		.400	.300	3	8	104305-4
1		1.000	.900	9	20	104305-3
1		1.700	1.600	16	34	104305-2
1		.500	.400	4	10	104305-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H MOLL 11-20-87	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES		CHK P de Jong 11-20-87	RECEPTACLE ASSY, AMPMODU, MASS TERMINATION, DBL ROW, .100 X .100 CL, #22-#26 AWG WIRE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD -	NAME	
0 PLC ± -		PRODUCT SPEC 108-25018	SIZE CAGE CODE DRAWING NO	
1 PLC ± -		APPLICATION SPEC 114-25015	RESTRICTED TO	
2 PLC ± -		WEIGHT -	A2 00779 C=104305	
3 PLC ± .005		CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV L1	
4 PLC ± -		FINISH SEE TABLE		
ANGLES ± -		MATERIAL HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR:BLACK, CONTACTS: PHOS BRONZE		

104305