



NOTES:



1. ALL DIMENSION IN MM [INCH]
2. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING SWITCHING: 150mA, 250V AC/DC
350mA, 110V AC/DC
5. CONTACT RATING (NON-SWITCHING) 5A
6. CONTACT MATERIAL: SILVER over COPPER ALLOY.
7. OPERATING FORCE: 425 $\pm$ 100 CM/STANDARD
8. OPERATING TEMP: -30 $^{\circ}$ to 85 $^{\circ}$ C
9. CIRCUIT SP: 5 POSITIONS, 30 $^{\circ}$ INDEX.
10. DIELECTRIC STRENGTH 1000V RMS min. @ SEA LEVEL
11. DESIGNATE MAJOR DIMENSIONS
12. LOCK NUT AND WASHER NOT SHOWN.



CONTACT CONFIGURATION
Timing: Non-Shorting (BBM)

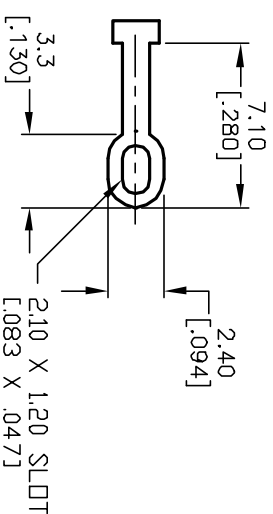

TERMINATION DETAIL
SCALE 2X

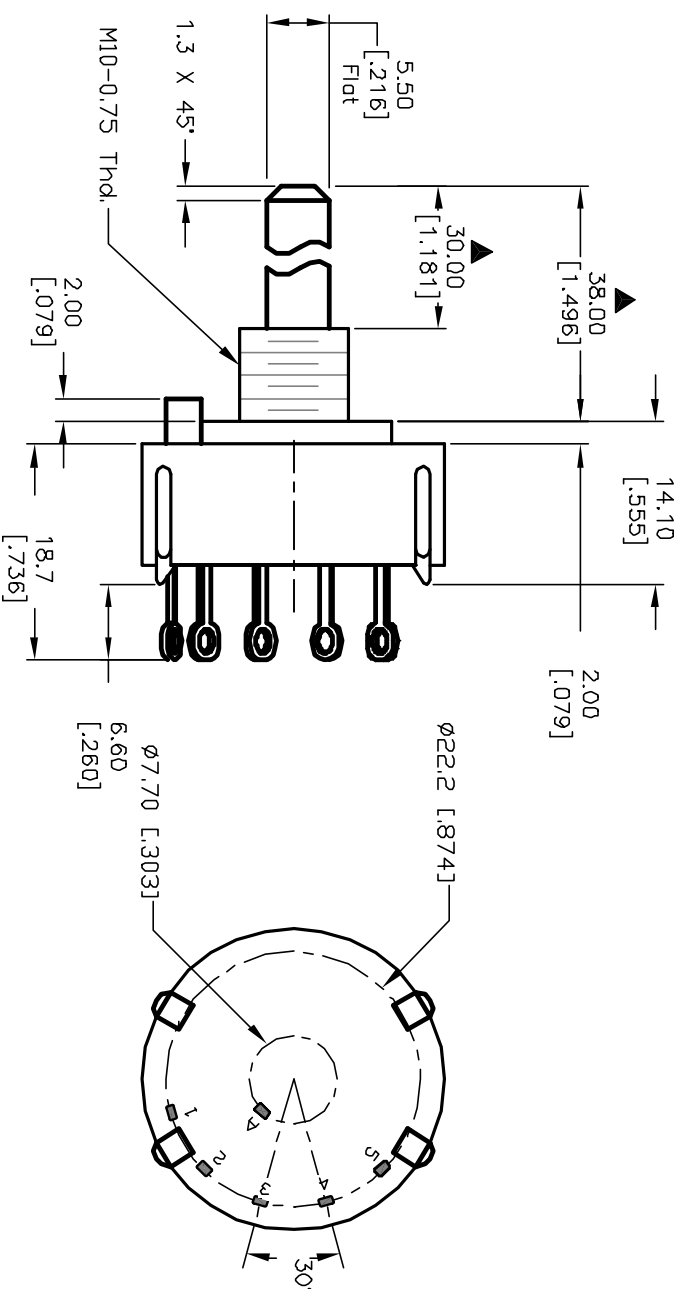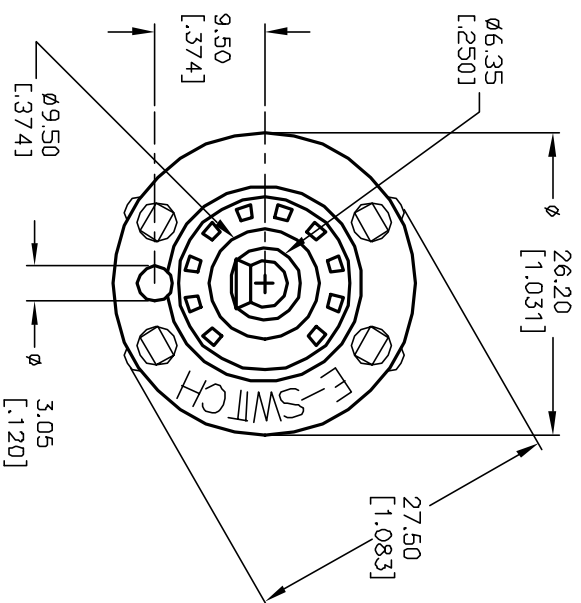

E-SWITCH®				
TITLE		KC-15-A (30.0mm) 02-N-L-S		
SCALE	DATE	DR	DWG	REV
1.5:1	5/20/02	CJB	G527538	A

A	12163	RELEASED FOR PRODUCTION	5/20/02 CJB
REV.	ECN No.	DESCRIPTION	DATE CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED