
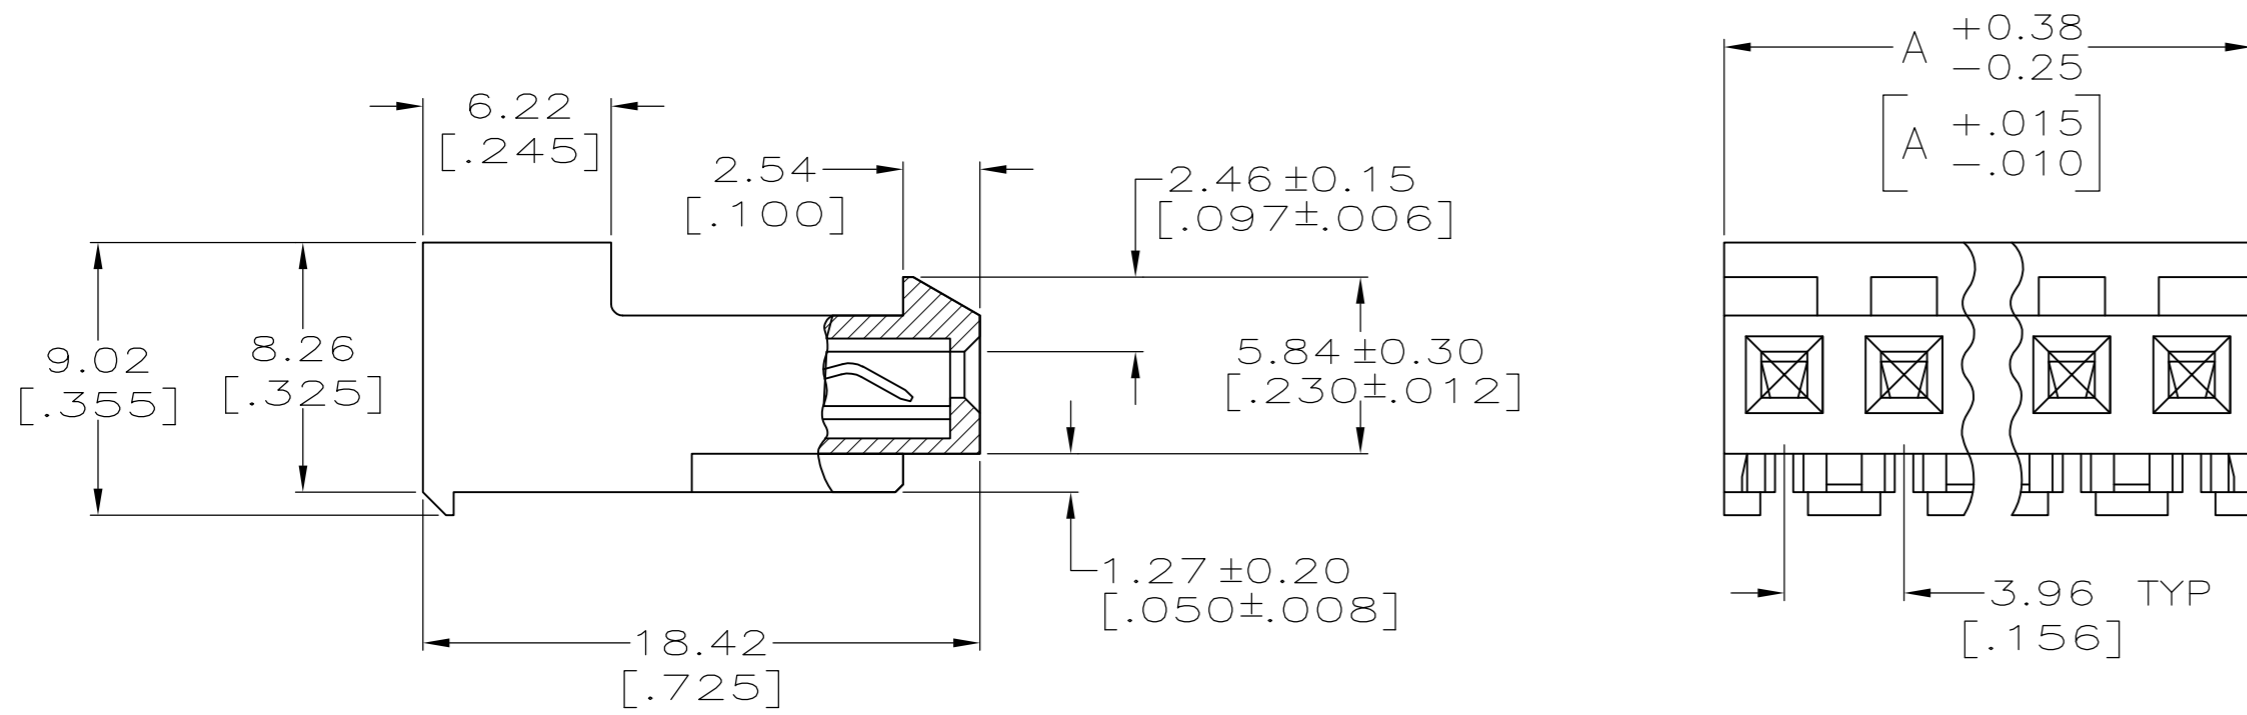


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
CM	00	C2	REVISED PER ECR-15-006702	28JUL2015	NK	PQ	

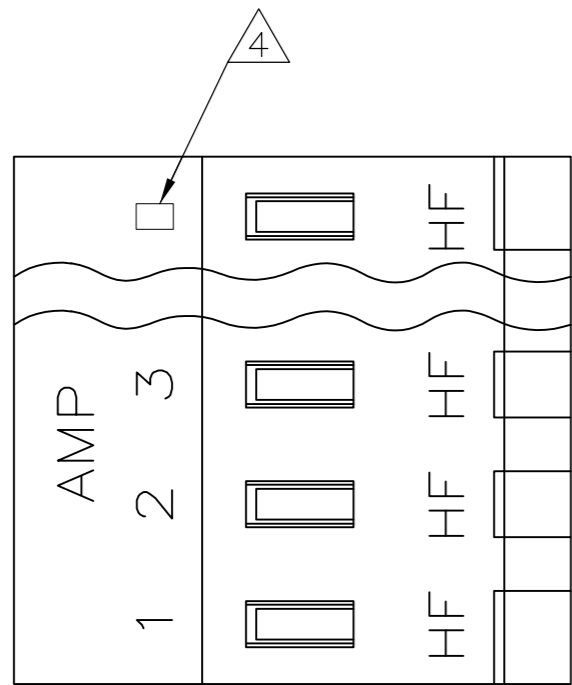

1 MATERIAL:
 CONNECTOR - NYLON UL94-V2 (ORANGE)
 CONTACTS - 0.30[.012] THICK COPPER ALLOY (BRIGHT TIN-LEAD 0.00203[.000080] MIN. THICK FOR CONTACTS 643191-2 THRU 643191-6). (MATTE WHISKER MITIGATED TIN 0.00203[.000080] MIN. THICK FOR 3-643191-2 THRU 3-643191-6).

- 2. CONTACTS ACCEPT 18 AWG WIRE WITH 2.41[.095] MAX INSULATION DIAMETER.
- 3. CONTACTS MUST ACCEPT 1.14±0.03 [.045±.001] POST AND REMAIN LOCKED IN POSITION.
- 4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
- 5. DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6. HOUSING FEATURES ARE: CLOSED END WITH LOCKING RAMP.(HIGH FORCE CONTACT)

REV	DESCRIPTION	DATE	DWN	APVD
6	YES	23.77[.936]	6	3-643191-6
5	YES	19.81[.780]	5	3-643191-5
4	YES	15.85[.624]	4	3-643191-4
3	YES	11.89[.468]	3	3-643191-3
2	YES	7.92[.312]	2	3-643191-2
OBSOLETE				
6	NO	23.77[.936]	6	643191-6
5	NO	19.81[.780]	5	643191-5
4	NO	15.85[.624]	4	643191-4
3	NO	11.89[.468]	3	643191-3
2	NO	7.92[.312]	2	643191-2
OBSOLETE				
	LEADFREE	DIM A	NO. OF CIRCUITS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. CARPENTER 21JUL2003	TE Connectivity	
DIMENSIONS: mm [INCHES]		CHK D. BOSSI 21JUL2003		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. BOSSI 21JUL2003	NAME	
0 PLC ±		PRODUCT SPEC	MTA 156 CONNECTOR ASSEMBLY, 18 AWG, HIGH FORCE,SPECIAL	
1 PLC ±		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
2 PLC ±		108-1051	A2 00779 C=643191	
3 PLC ± 0.13 [.005]		114-1020	SCALE 4:1 SHEET 1 OF 1 REV C2	
4 PLC ±		WEIGHT		
ANGLES ±		CUSTOMER DRAWING		
FINISH				