

CABLE BREAKOUT BOOTS, TWO ENTRY

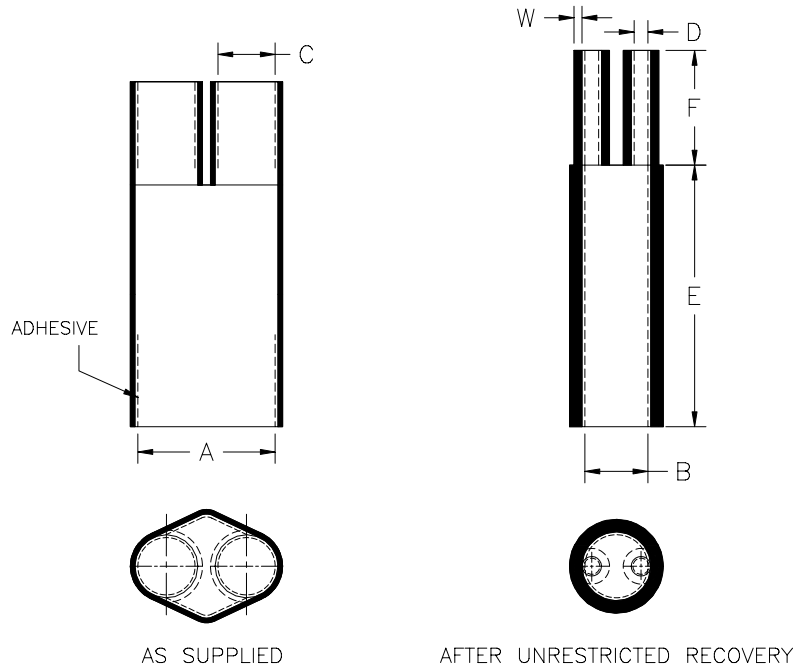



Table of Dimensions, inch (mm):

PART NUMBER (See Note*)	Body ID		Leg ID		Rec'd. Length Min		Rec'd. Wall Ref. (W)
	Exp. (A), Min	Rec'd. (B), Max	Exp. (C), Min	Rec'd. (D), Max	(E), Body	(F), Leg	
D3-9FR	0.80 (20)	0.37 (9)	0.33 (8)	0.11 (3)	2.0 (51)	0.7 (18)	0.05 (1.3)
D14-30FR	1.20 (30)	0.60 (15)	0.50 (13)	0.17 (4)	2.5 (64)	1.0 (25)	0.07 (1.8)
D50-100FR	1.90 (48)	0.90 (23)	0.75 (19)	0.30 (8)	3.0 (76)	1.2 (30)	0.10 (2.5)
D50-200FR	2.50 (63)	0.90 (23)	0.75 (19)	0.30 (8)	3.0 (76)	1.2 (30)	0.10 (2.5)
D200-400FR	3.00 (76)	1.50 (38)	1.45 (37)	0.50 (13)	3.5 (89)	1.5 (38)	0.12 (3.0)

Note*: Add "NA" to the end of Part Number if no adhesive is required

Material: Heat shrinkable boot material in accordance with -3 polyolefin

Factory applied sealant: Factory applied hot melt adhesive is standard.

 Raychem Products, North America Tyco Electronics Corporation 300 Constitution Drive Menlo Park, CA 94025 USA		Product Brand: <div style="text-align: center; font-size: 1.2em; font-weight: bold;">Raychem</div>	
Specification Control Drawing		Title: <div style="text-align: center; font-weight: bold;">CABLE BREAKOUT BOOT, TWO ENTRY</div>	
		Size A	Cage Code 06090
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE SHOWN IN BRACKETS		Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	
Drawn By: A.Ng		Org. Date: 03/10/2003	Original file:
		File : R030128.doc	Scale: None
		Rev.: A	Rev. Date: March 10, 2003
		Sheet: 1 of 1	