

## Tgrease<sup>™</sup> 2500 Series Thermal Grease

### Innovative **Technology** for a **Connected** World



## ENVIRONMENTALLY FRIENDLY THERMALLY CONDUCTIVE GREASE

Tgrease<sup>™</sup> 2500 is a silicone-free thermal grease for use in high performance CPU's and GPU's. With a high thermal conductivity of 3.8 W/mK, Tgrease<sup>™</sup> 2500 thoroughly wets out thermal surfaces to create very low thermal resistance.

Tgrease<sup>™</sup> 2500 eliminates the migration issues of siliconebased grease to create superior reliability. Tgrease<sup>™</sup> 2500 is ideal for situations where automatic dispensing and screen-printing are required.

Tgrease<sup>™</sup> 2500 is non-toxic and environmentally safe. Tgrease<sup>™</sup> 2500 is available in 1kg (pint container), 3kg (quart container), and 10kg (gallon container) or custom packaged in syringes for automated applications.

### **APPLICATIONS**

- High performance CPU's and GPU's
- Chipsets
- Graphic processing chips
- Custom ASICS

PROPERTIES	
Color	White
Density	3.42 g/cc
Viscosity Brookfield Viscometer	2,500,000cP TF spindle at 2rpm (helipath) and 23°C
Temperature Range	-55°C to 150°C
Outgassing (TML)	0.91%
Outgassing (CVCM)	0.15%
UL Flammability Rating	94 V0
Thermal Conductivity	3.8 W/mK
Thermal Resistance @ 10 psi @ 50 psi	0.023°C-in²/W (0.15 C-cm2/W) 0.020°C-in²/W (0.13 C-cm2/W)
Volume Resistivity	3.5 x 1012 Ohm-cm
Dielectric Constant @ 1KHz/1MHz	5.7 / 5.6

## global solutions: local support ...


Americas: +1.800.843.4556 Europe: +49.8031.2460.0 Asia: +86.755.2714.1166


CLV-customerservice@lairdtech.com www.lairdtech.com/thermal





# **Tgrease<sup>™</sup> 2500 Series** Thermal Grease

Innovative **Technology** for a **Connected** World

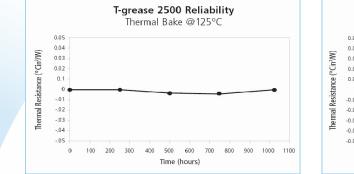

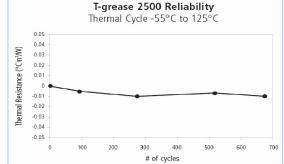

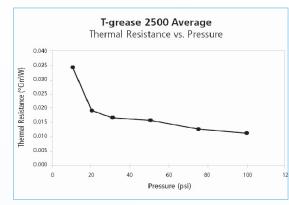

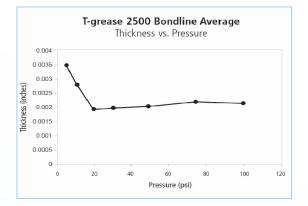

#### THR-DS-Tgrease-1500 0710

Any information furnished by Laid Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability of suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies that not once question durates of any laird Technologies materials or products for any specific or general uses. Laird Technologies that not once question durates of any laird Technologies materials or products for any specific or general uses. Laird Technologies to the fitness, merchantability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies that not the cain Technologies to the accurate method conditions of sale in effect from time to time, a cory of which will be funnished upon request. (Ø Copyright 2010 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies to company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights. A14265-00 Rev.E 03/29/07.