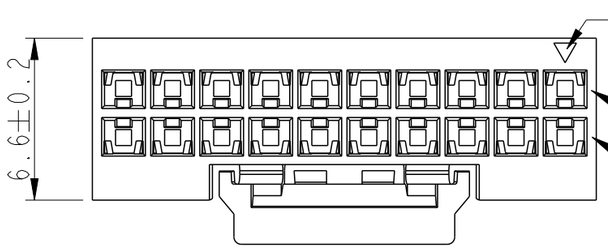

10118940-YXX-ZZZLF NOTE 6 & 8

POLARIZATION CODE
(OPTIONAL)
SEE NOTE 9

TOTAL NB OF POSITIONS

0 : COLOR BLACK
1 : COLOR CREAM

PART NUMBER	NBR OF POS	"A"±0.2	"B"	TOOLED
10118940-Y06LF	2x3	6.54	4.00	YES
10118940-Y08LF	2x4	8.54	6.00	YES
10118940-Y10LF	2x5	10.54	8.00	YES
10118940-Y12LF	2x6	12.54	10.00	YES
10118940-Y14LF	2x7	14.54	12.00	YES
10118940-Y16LF	2x8	16.54	14.00	YES
10118940-Y18LF	2x9	18.54	16.00	NO
10118940-Y20LF	2x10	20.54	18.00	YES
10118940-Y22LF	2x11	22.54	20.00	YES
10118940-Y24LF	2x12	24.54	22.00	YES
10118940-Y26LF	2x13	26.54	24.00	NO
10118940-Y28LF	2x14	28.54	26.00	NO
10118940-Y30LF	2x15	30.54	28.00	YES
10118940-Y32LF	2x16	32.54	30.00	NO
10118940-Y34LF	2x17	34.54	32.00	YES

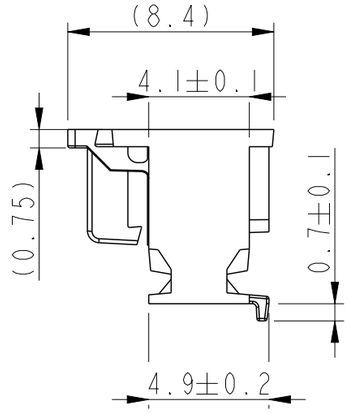

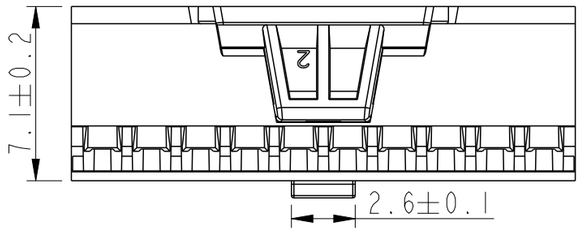

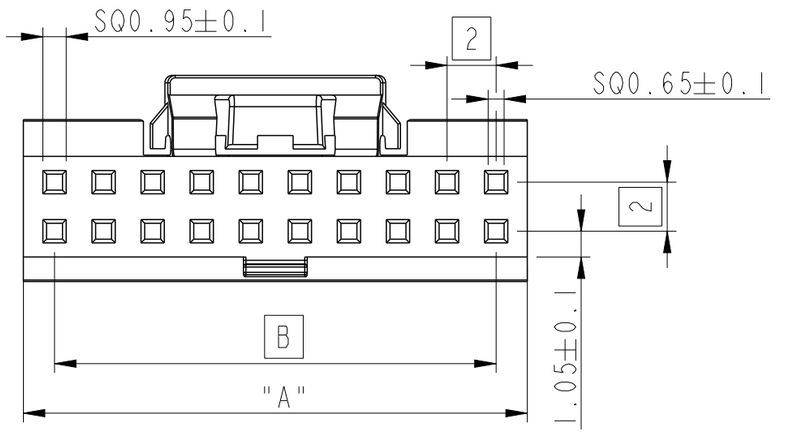



CAVITY FILLED EXAMPLE
(...-B01LF)
SEE NOTE 7



DESIGN FOR 10118940-006LF
& 10118940-008LF ONLY

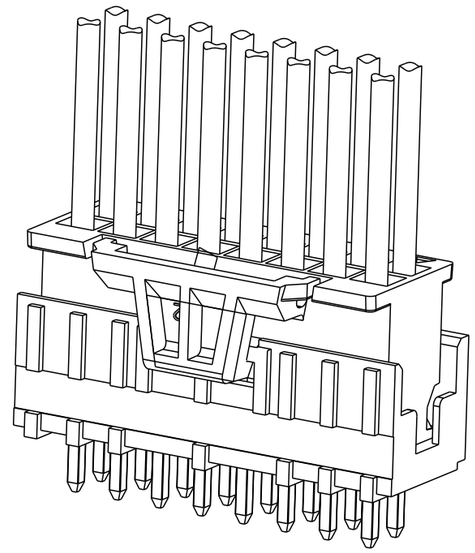

APPLICATION
SEE NOTE 2 & 3

FCI LOGO



NOTES :
1 - MATERIAL : PA6.6 25% GLASSFILLED, UL-94V-0
MEETS GWT 900°C-960°C.
2 - FOR USE WITH MINITEK CTW CONTACTS:
AWG 26-30, SERIE 77138
AWG 22-24 SERIE 10044403
3 - TO BE MATED WITH MINITEK HEADERS SERIES
98414 / 98416 / 98417 / 98424 AND 10075025.
4 - PRODUCT SPECIFICATIONS : GS-12-415
5 - PACKAGING BULK.
6 - RoHS COMPLIANT, THE PRODUCT IS NOT
INTENDED TO BE EXPOSED TO ANY SOLDER
PROCESS.
7 - THE TRIANGLE INDICATES THE FIRT POSITION
8 - PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND
OTHERS COUNTRY REGULATIONS AS PER GS-022-008.
9 - FOR POLARIZATION, NUMBER THE CAVITY
NUMBER TO BE SPECIFIED.
EXAMPLE: -B01 = CAVITY 01 UNFILLED.
OMIT FROM PART NUMBER IS FEATURE NOT APPLICABLE.

Copyright FCI.

spec ref	-			dr	Benoit Vernier	2015/10/23	projection	mm
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Marty Glass	2015/10/29		
				chr	-	-		
				appr	-	-	product family	
surface ISO 1302	linear	0.X	±0.3	FCI	title	MINITEK CTW HOUSING		
		0.XX	±0.10			ACTIVE LACH II , ADVANCED		
		0.XXX	±0.05		dwg no	10118940		rev E
	angular	0°	±2°	www.fci.com	cat. no.	Product - Customer Drw		

size A3 | scale 4:1 | ecn no - | rel level Released | sheet 1 of 1