

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20





© COPYRIGHT 20 BY -

ALL RIGHTS RESERVED.

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|-----|---------------------------|-----------|-----|------|
| A | | RELEASED FOR PRODUCTION | 18OCT2017 | SK | MZ |
| B | | REVISED PER ECR-18-002795 | 07MAR2018 | RS | CVS |
| | | | | | |
| | | | | | |



2324697-6 AS SHOWN

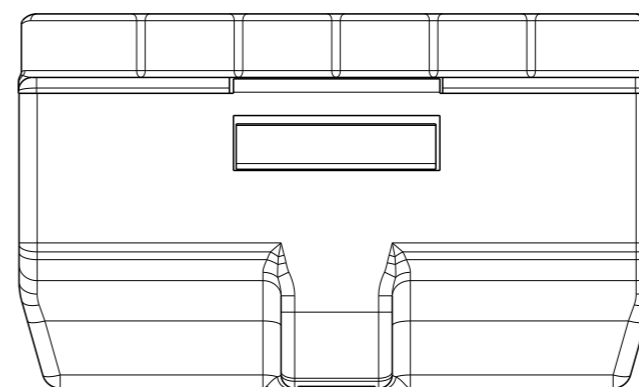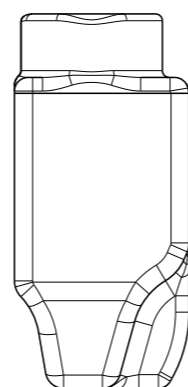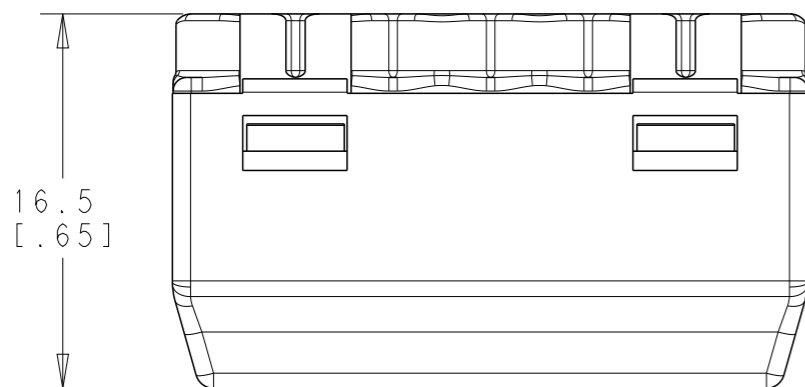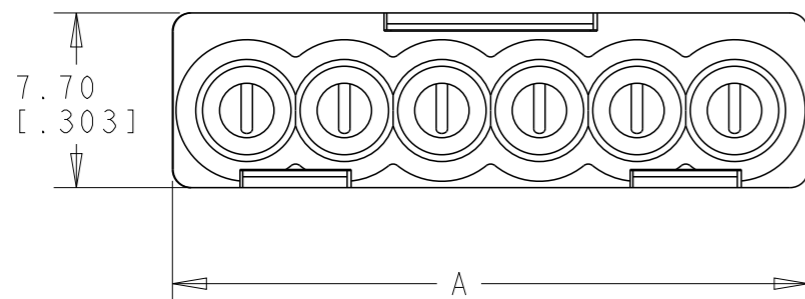

NOTES:

- HOUSING MATERIAL: UL 94V-0 POLYCARBONATE.
- TERMINAL INSERT: (1) TIN PLATED COPPER
(2) SPRING PLATE: STEEL.
- VOLTAGE: 600V (UL), 450V (IEC).
- CURRENT: 24A (IEC).
- WORKING TEMPERATURE: 85° (IEC), 105°C (UL).
- WIRE RANGE:
0.5-2.5mm² RIGID SOL. / 1.0-2.5mm² RIGID STR. (IEC)
22-12AWG, SOL. Cu / 18-12AWG, STR. Cu /
22-14AWG, TIN-DIPPED STR. Cu (UL)
- STRIPPING LENGTH: 11.0[.43].

| | | | |
|--------|-----------------|--------------|----------------|
| PURPLE | 28.0 [1.100] | 6 | 2324697-6 |
| BLUE | 23.7 [.933] | 5 | 2324697-5 |
| CLEAR | 19.4 [.764] | 4 | 2324697-4 |
| ORANGE | 15.1 [.594] | 3 | 2324697-3 |
| YELLOW | 10.8 [.425] | 2 | 2324697-2 |
| COLOR | DIM "A" | NO. POSITION | TE PART NUMBER |

| | | | | |
|---------------------------------------------------------------------------------------|--|-------------------------------|-------------------------------------------------------------------------------------------------------|---------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN 06SEP2017 SHIVAKUMAR |  TE Connectivity | |
| DIMENSIONS: mm[INCHES] | | CHK 06SEP2017 MARCO ZUCCA | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD 06SEP2017 MARCO ZUCCA | PRODUCT SPEC 108-133070 | RESTRICTED TO |
|  | | 0 PLC ±- | APPLICATION SPEC 114-133071 | SIZE |
| MATERIAL | | 1 PLC ±0.4 | WEIGHT | CAGE CODE |
| NOTES 1 AND 2 | | 2 PLC ±0.20 | SEE TABLE | DRAWING NO |
| FINISH TIN PLATED COPPER | | 3 PLC ±- | CUSTOMER DRAWING | 300779 |
| | | 4 PLC ±- | | ©=2324697 |
| | | ANGLES ±- | | SCALE 3:1 |
| | | | | SHEET 1 OF 2 |
| | | | | REV B |

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


20

© COPYRIGHT 20 BY -


ALL RIGHTS RESERVED.

REVISIONS


| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|-----|-------------|------|-----|------|
| - | | SEE SHEET 1 | - | - | - |
| | | | | | |
| | | | | | |




2324697-2 AS SHOWN

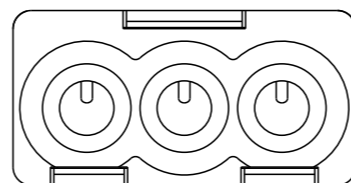


2324697-3 AS SHOWN

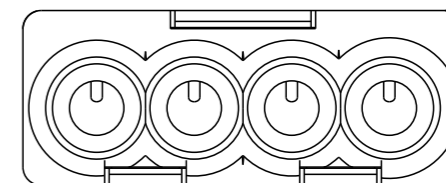

2324697-4 AS SHOWN

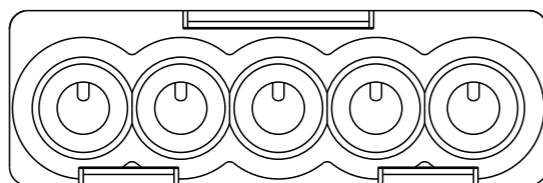


2324697-5 AS SHOWN

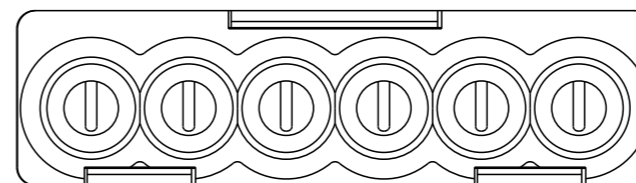

2324697-6 AS SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]



TOLERANCES UNLESS OTHERWISE SPECIFIED:

| | |
|--------|-------|
| 0 PLC | ±- |
| 1 PLC | ±0.4 |
| 2 PLC | ±0.20 |
| 3 PLC | ±- |
| 4 PLC | ±- |
| ANGLES | ±- |

MATERIAL

NOTES
1 AND 2

FINISH

TIN PLATED
COPPER

DWN 06SEP2017

SHIVAKUMAR

CHK 06SEP2017

MARCO ZUCCA

APVD 06SEP2017

MARCO ZUCCA

PRODUCT SPEC

108-133070

APPLICATION SPEC

114-133071

WEIGHT

SEE TABLE

CUSTOMER DRAWING



TE Connectivity

NAME
COMPACT PUSH GRIP
CONNECTOR

| | | | |
|------|-----------|------------|---------------|
| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|------|-----------|------------|---------------|

| | | |
|----|-------|-----------|
| A3 | 00779 | C-2324697 |
|----|-------|-----------|

| | | | |
|-------|-------|----|-----|
| SCALE | SHEET | OF | REV |
| 3:1 | 2 | 2 | B |